



SAPIENZA
UNIVERSITÀ DI ROMA



CENTRO RICERCHE
ENRICO FERMI



Fragmentation
Of Target

Status of the FOOT experiment and first measurements of ^{16}O fragmentation cross sections on C target

Marco Toppi,
on behalf of the FOOT collaboration




Outline



FragmentatiOn
Of Target

- **FOOT (FragmentatiOn Of Target) experiment:**
 - **Motivations:** Particle Therapy and Radioprotection in space
 - **Strategy** for fragmentation cross section measurements
 - **FOOT status: progress of the experimental set-up**
 - **Preliminary cross section measurement for the process**
 $^{16}\text{O}+\text{C}$ @ 400 MeV/u
 - **Conclusions**

Particle Therapy

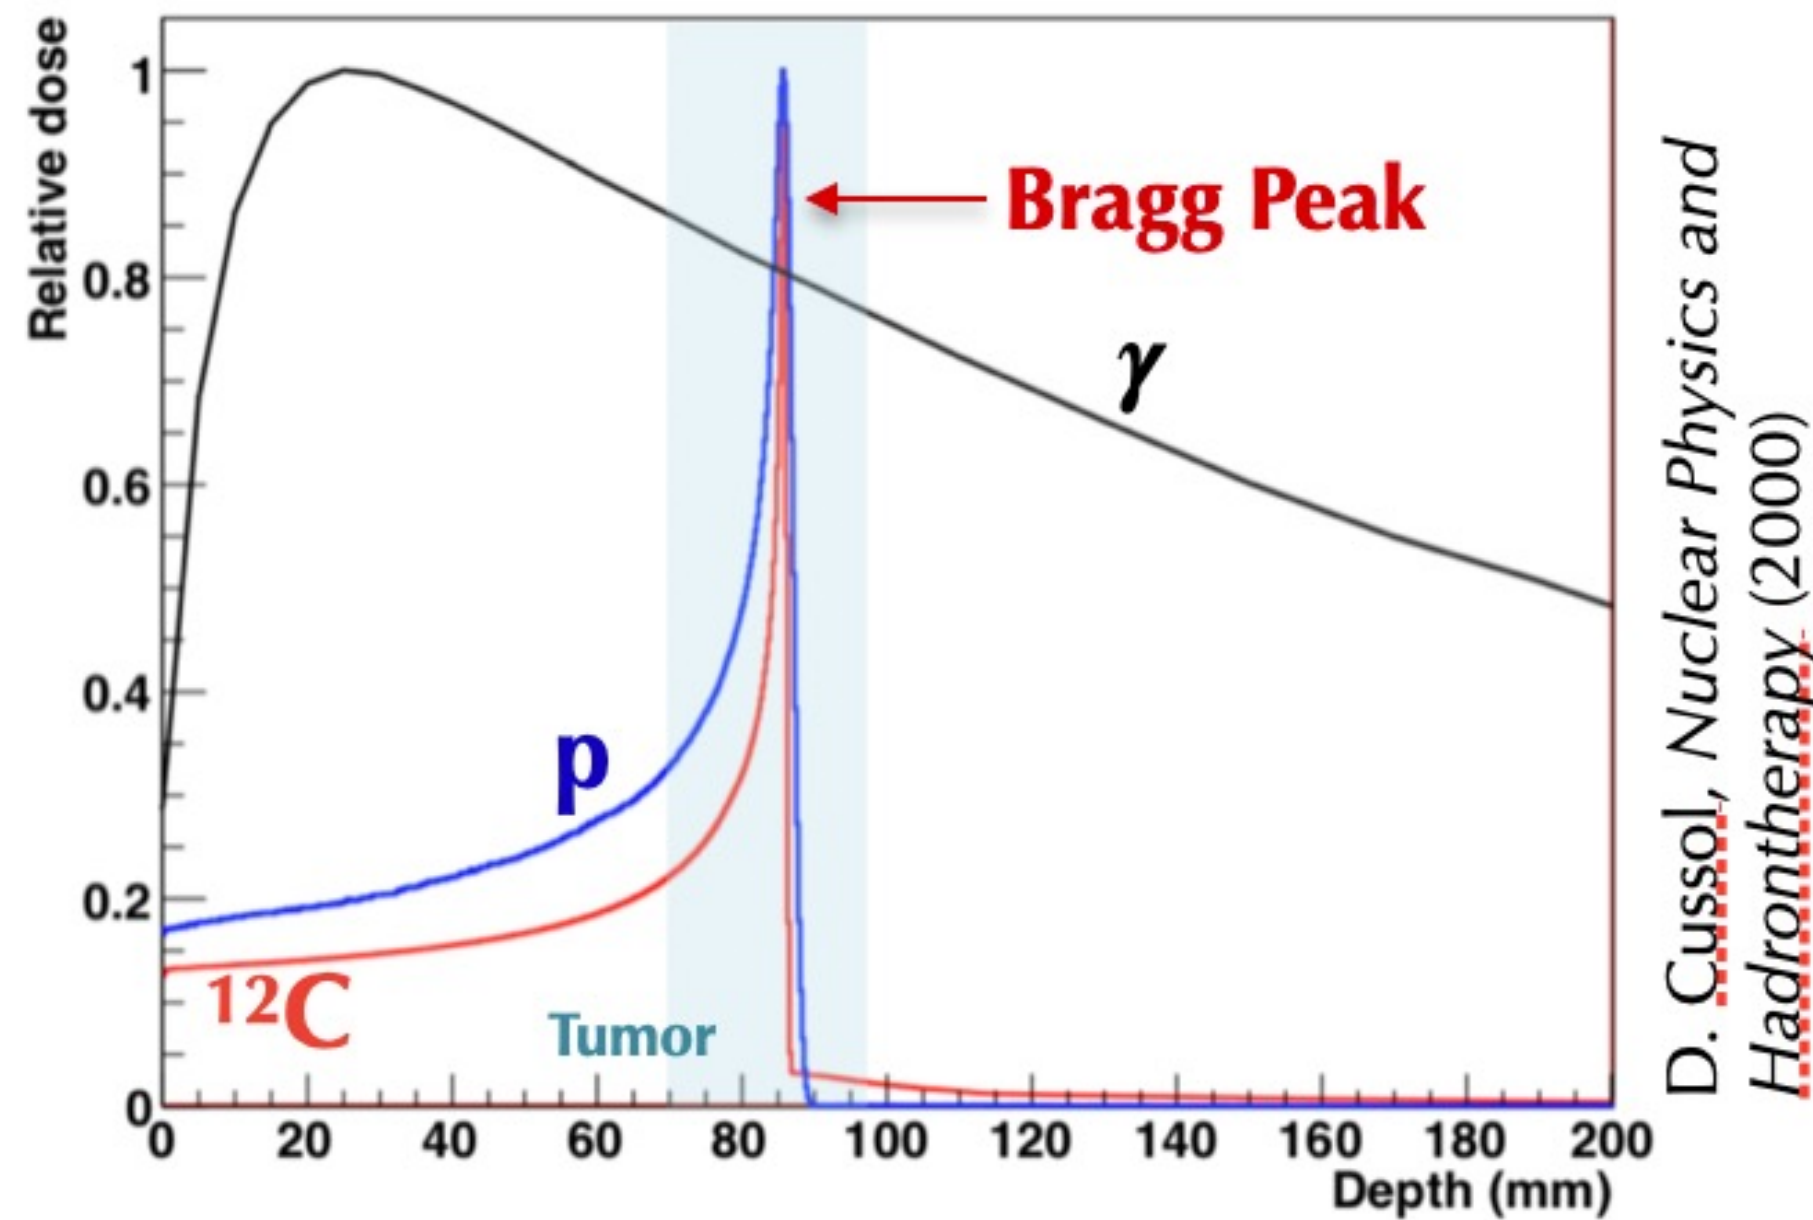

- Particle Therapy (**PT**) uses **proton or heavy ions** beams to treat **deep-seated solid tumors**.

- Advantages wrt conventional radiotherapy:

1. Maximum dose released inside the tumor: **Bragg Peak**

2. High **RBE** $\rightarrow RBE = \frac{D_{\gamma}}{D_{part}}$

- Disadvantages: **fragmentation** of **projectile** and **target** nuclei

Projectile fragments:

lower Z and higher range ($\beta_{frag} \sim \beta_{beam}$)



FRAGMENTATION TAIL

Target fragments:

Low kinetic energy and low range

LOCAL RELEASE

Fragments angular and energetic distributions

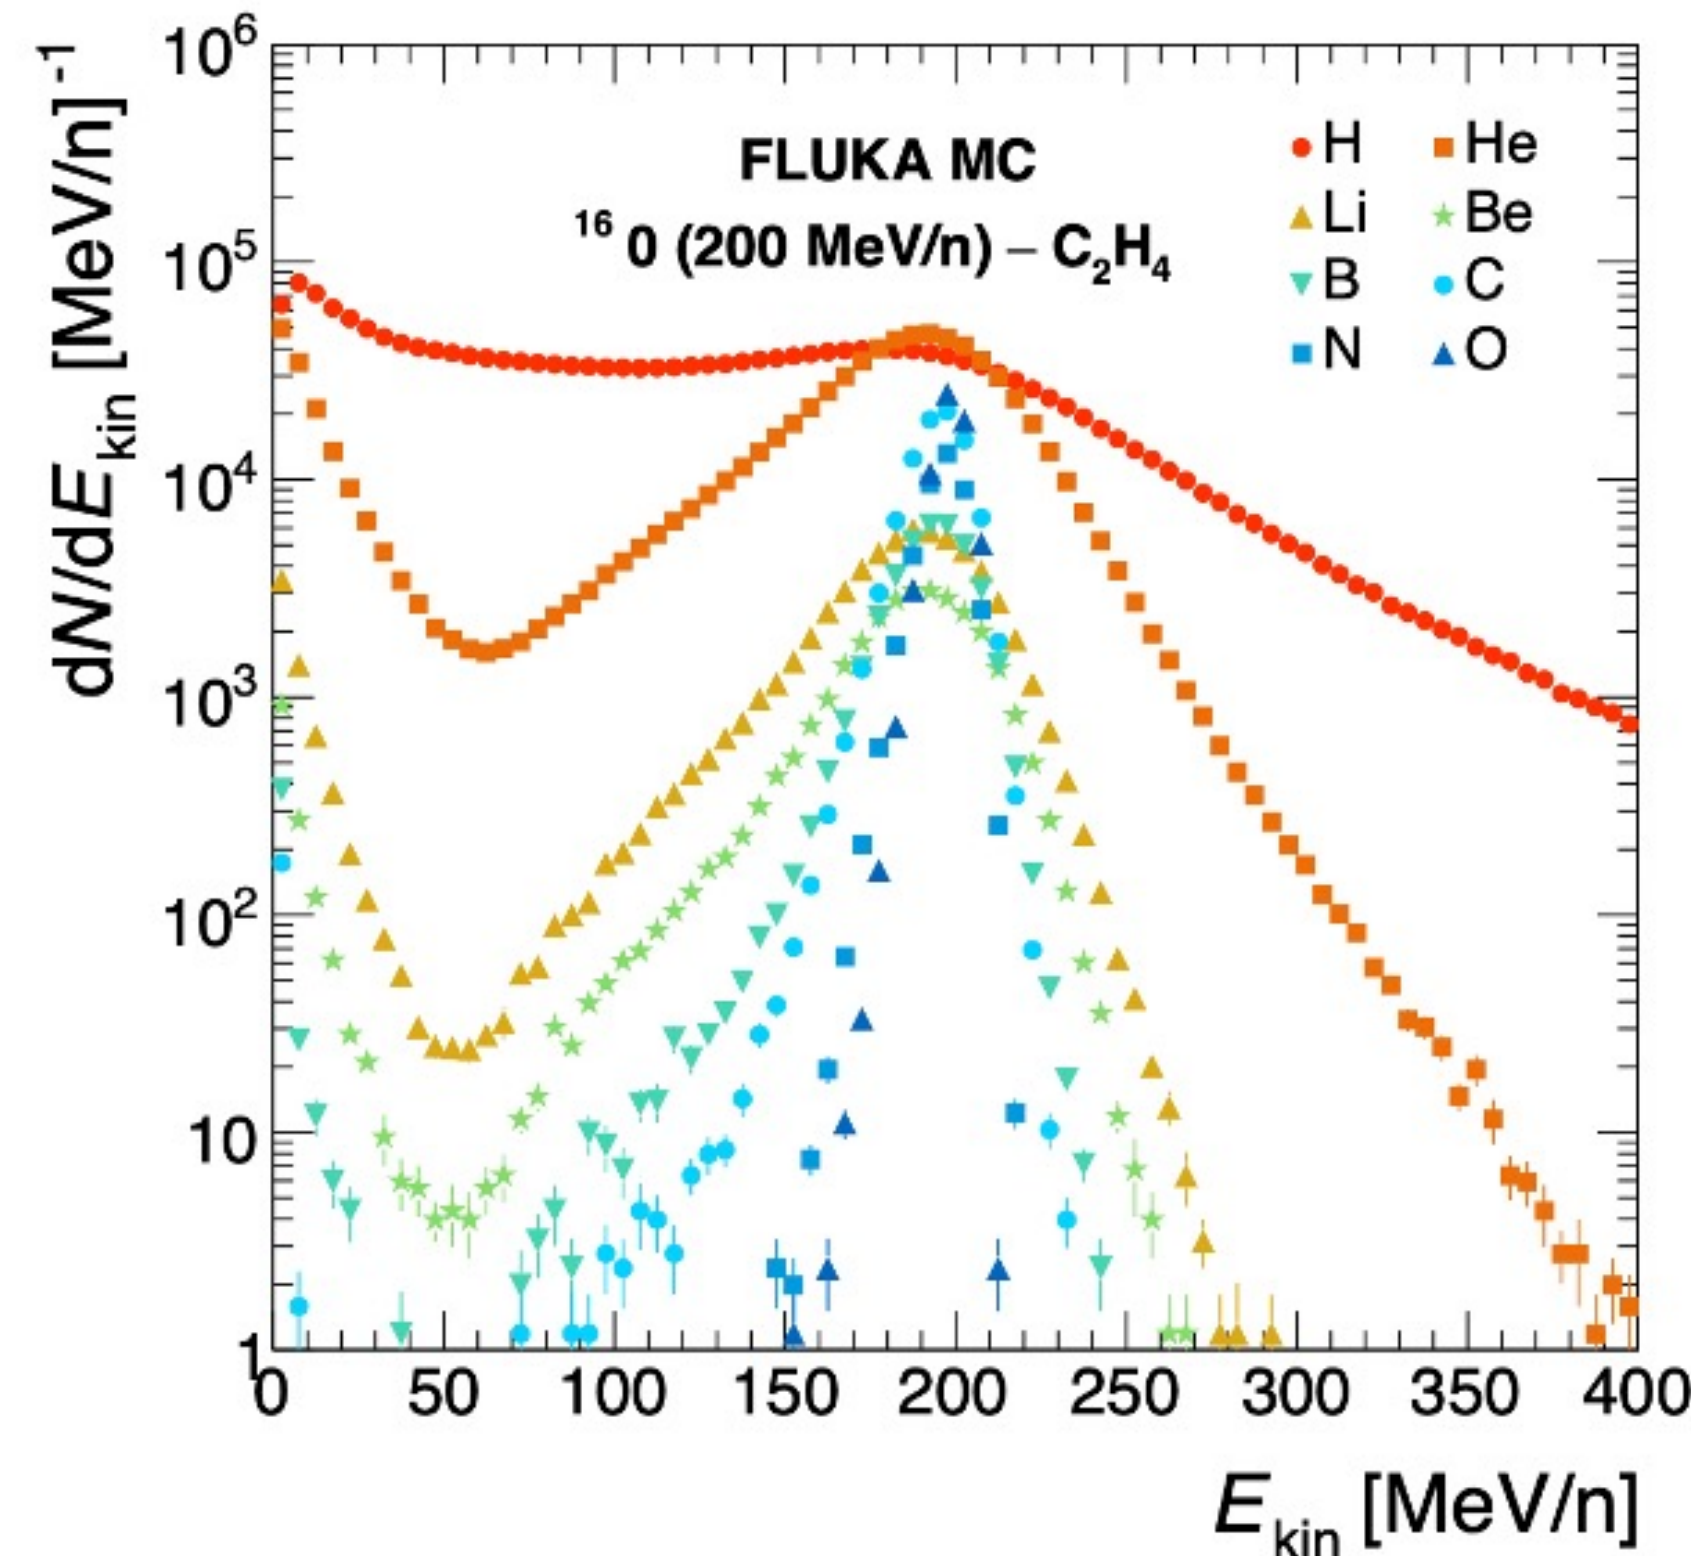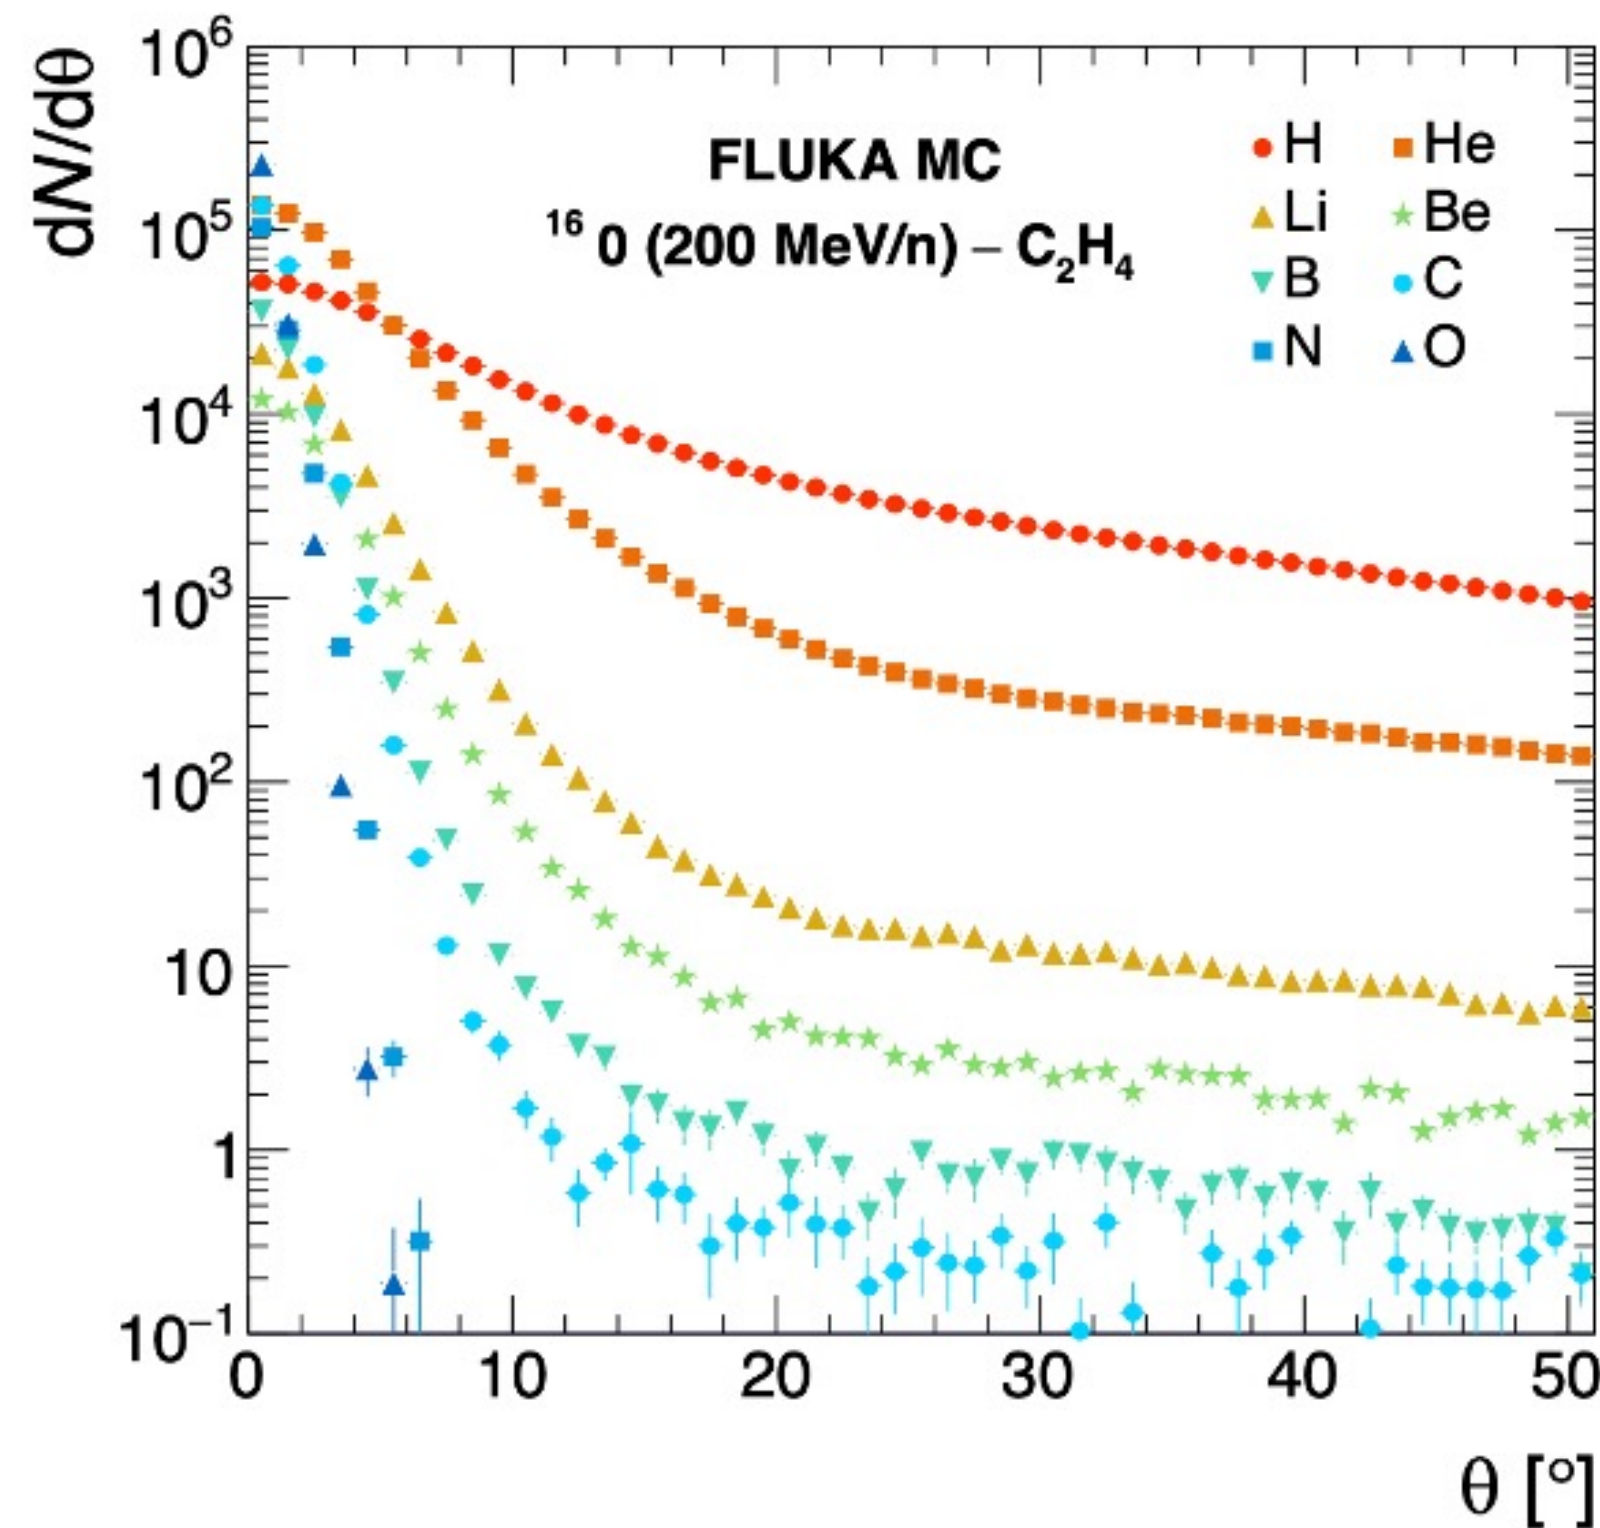

G.Battistoni et al.,
Front. Phys. 8:568242. doi: 10.3389/fphy.2020.568242

- $Z > 2$ fragments ~ same velocity of the ^{16}O ions. Emitted in forward direction
- Protons & neutrons are the most abundant fragments: wide kinetic energy and angular distributions


Projectile fragments:
lower Z and higher range ($\beta_{\text{frag}} \sim \beta_{\text{beam}}$)

FRAGMENTATION TAIL

Target fragments:
Low kinetic energy and low range


LOCAL RELEASE

Fragmentation consequences

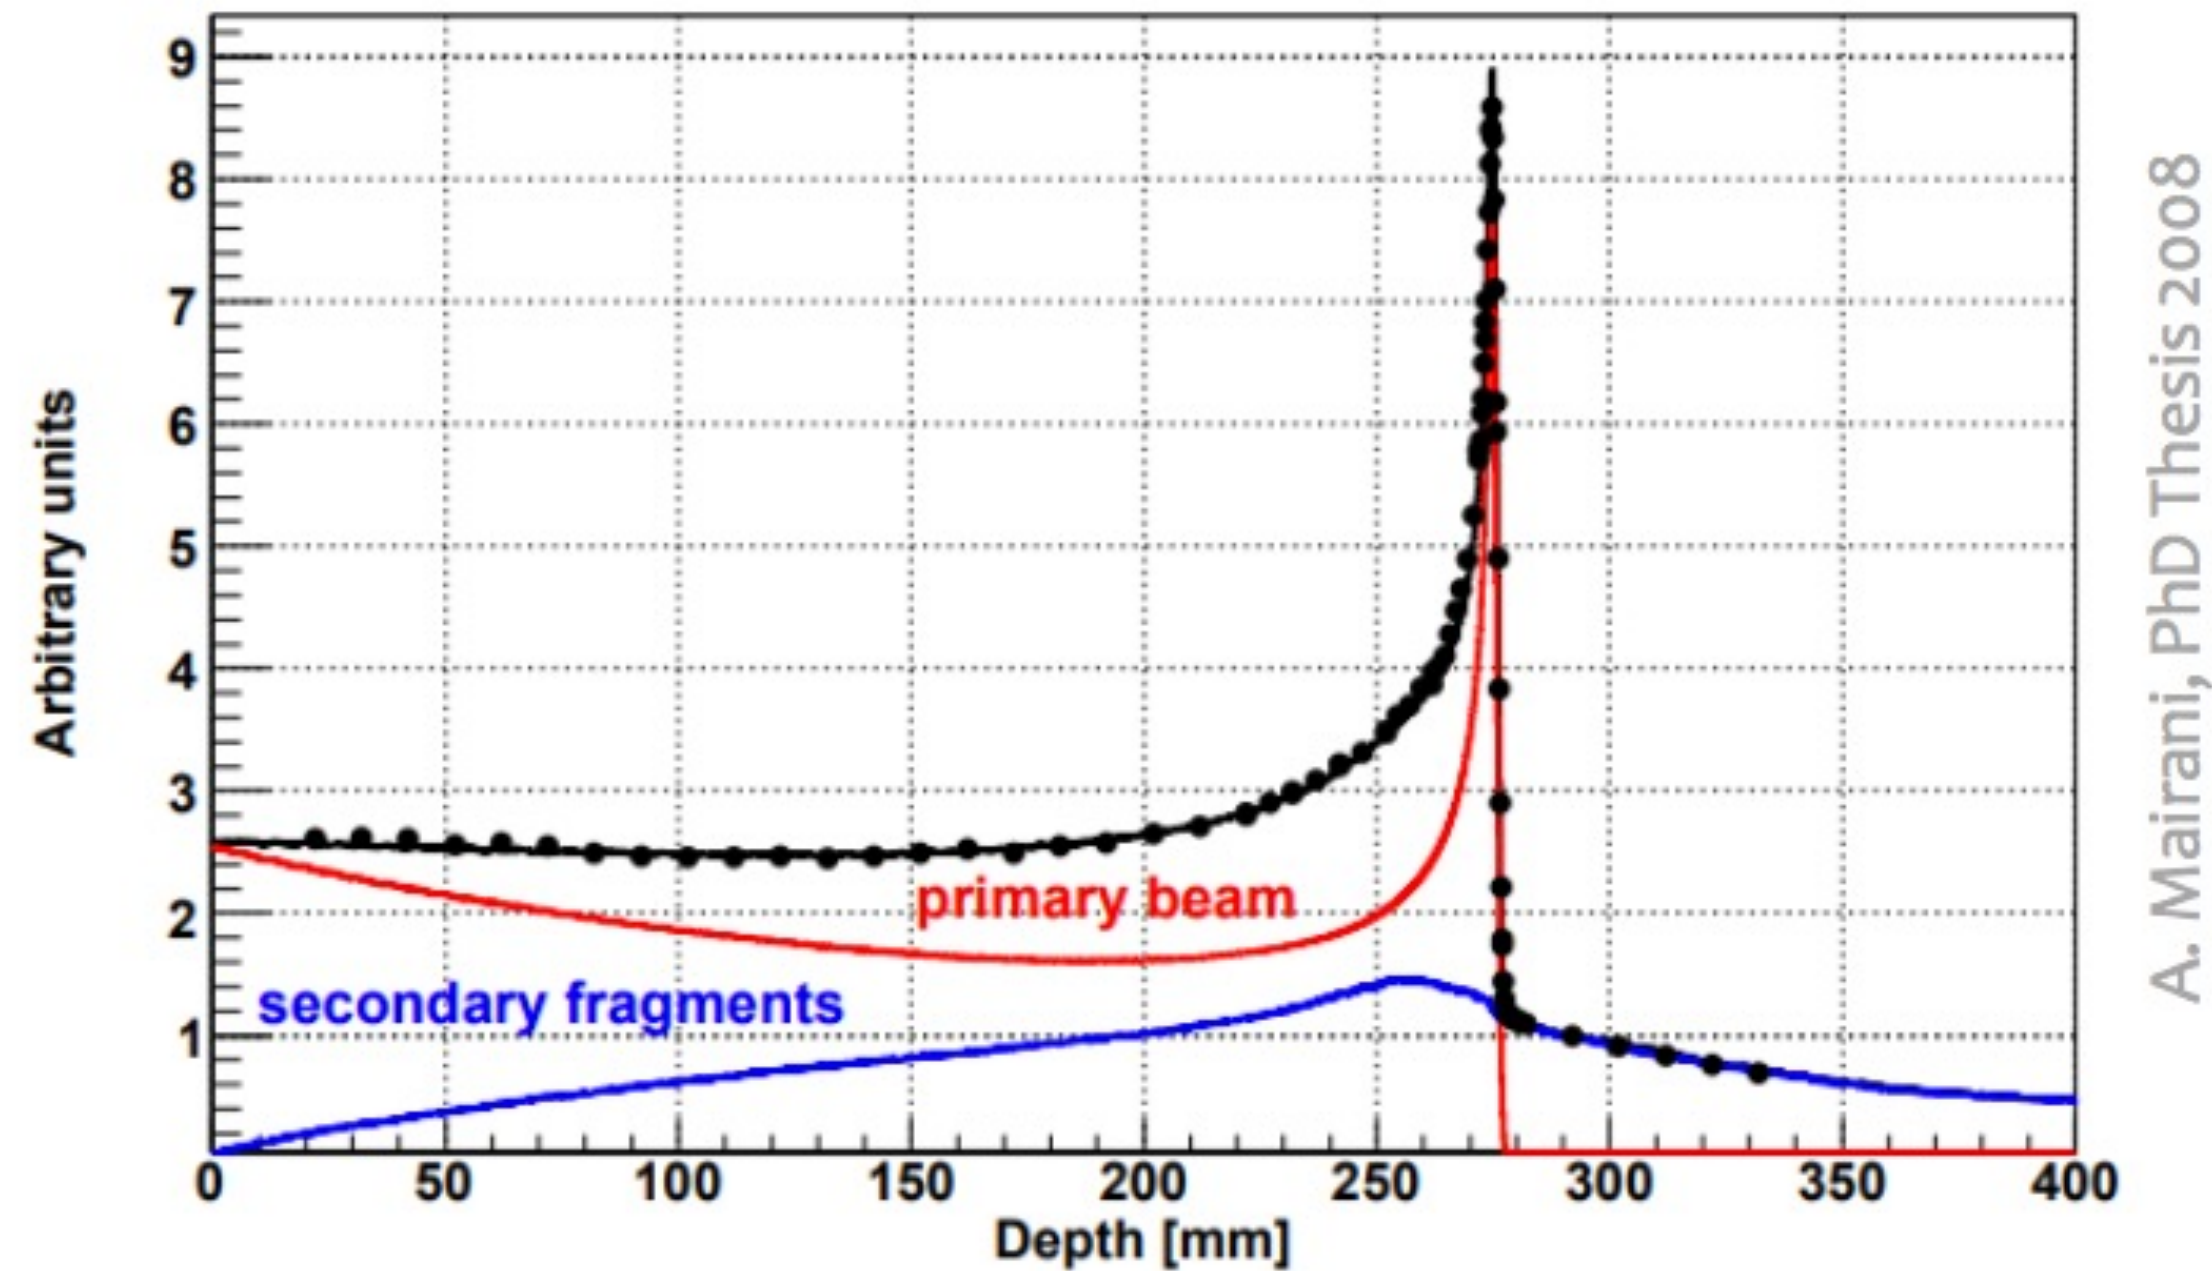

- Fragmentation processes modify the delivered dose map
- This effect strongly depends on the **mass** and the **energy** of the ion beam and on the **target** involved in the interaction


Fragmentation consequences

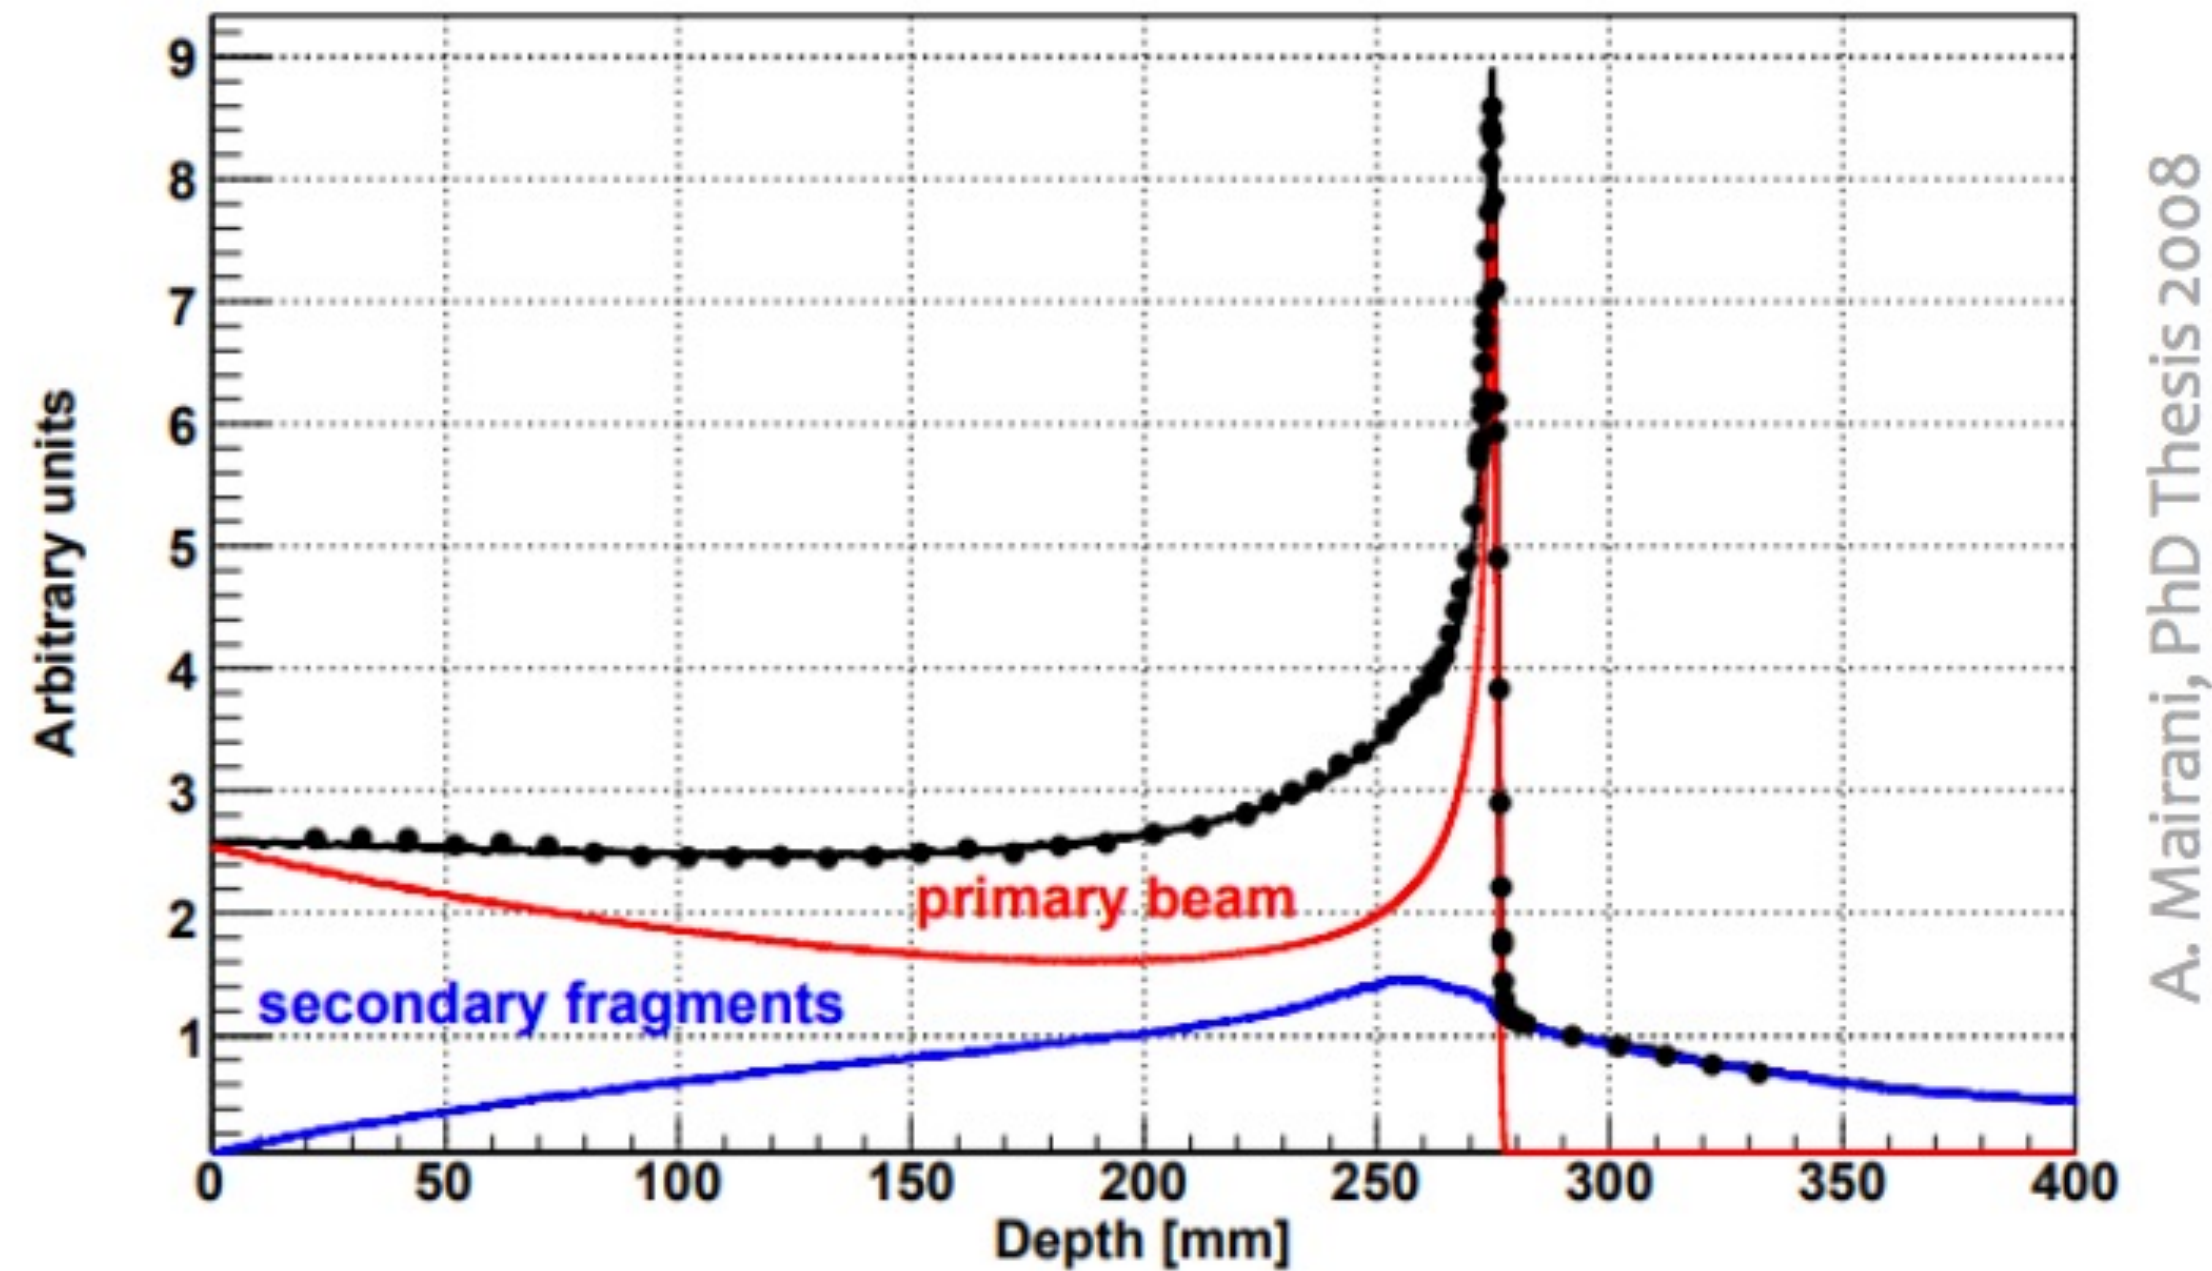


- Fragmentation processes modify the delivered dose map
- This effect strongly depends on the **mass** and the **energy** of the ion beam and on the **target** involved in the interaction

- **Treatment plans for PT are not yet able to include the fragmentation contribution with the accuracy (3%) required for radiotherapy**
- This is due to the lack of experimental data, and in particular of fragmentation cross section

Target fragmentation contribution

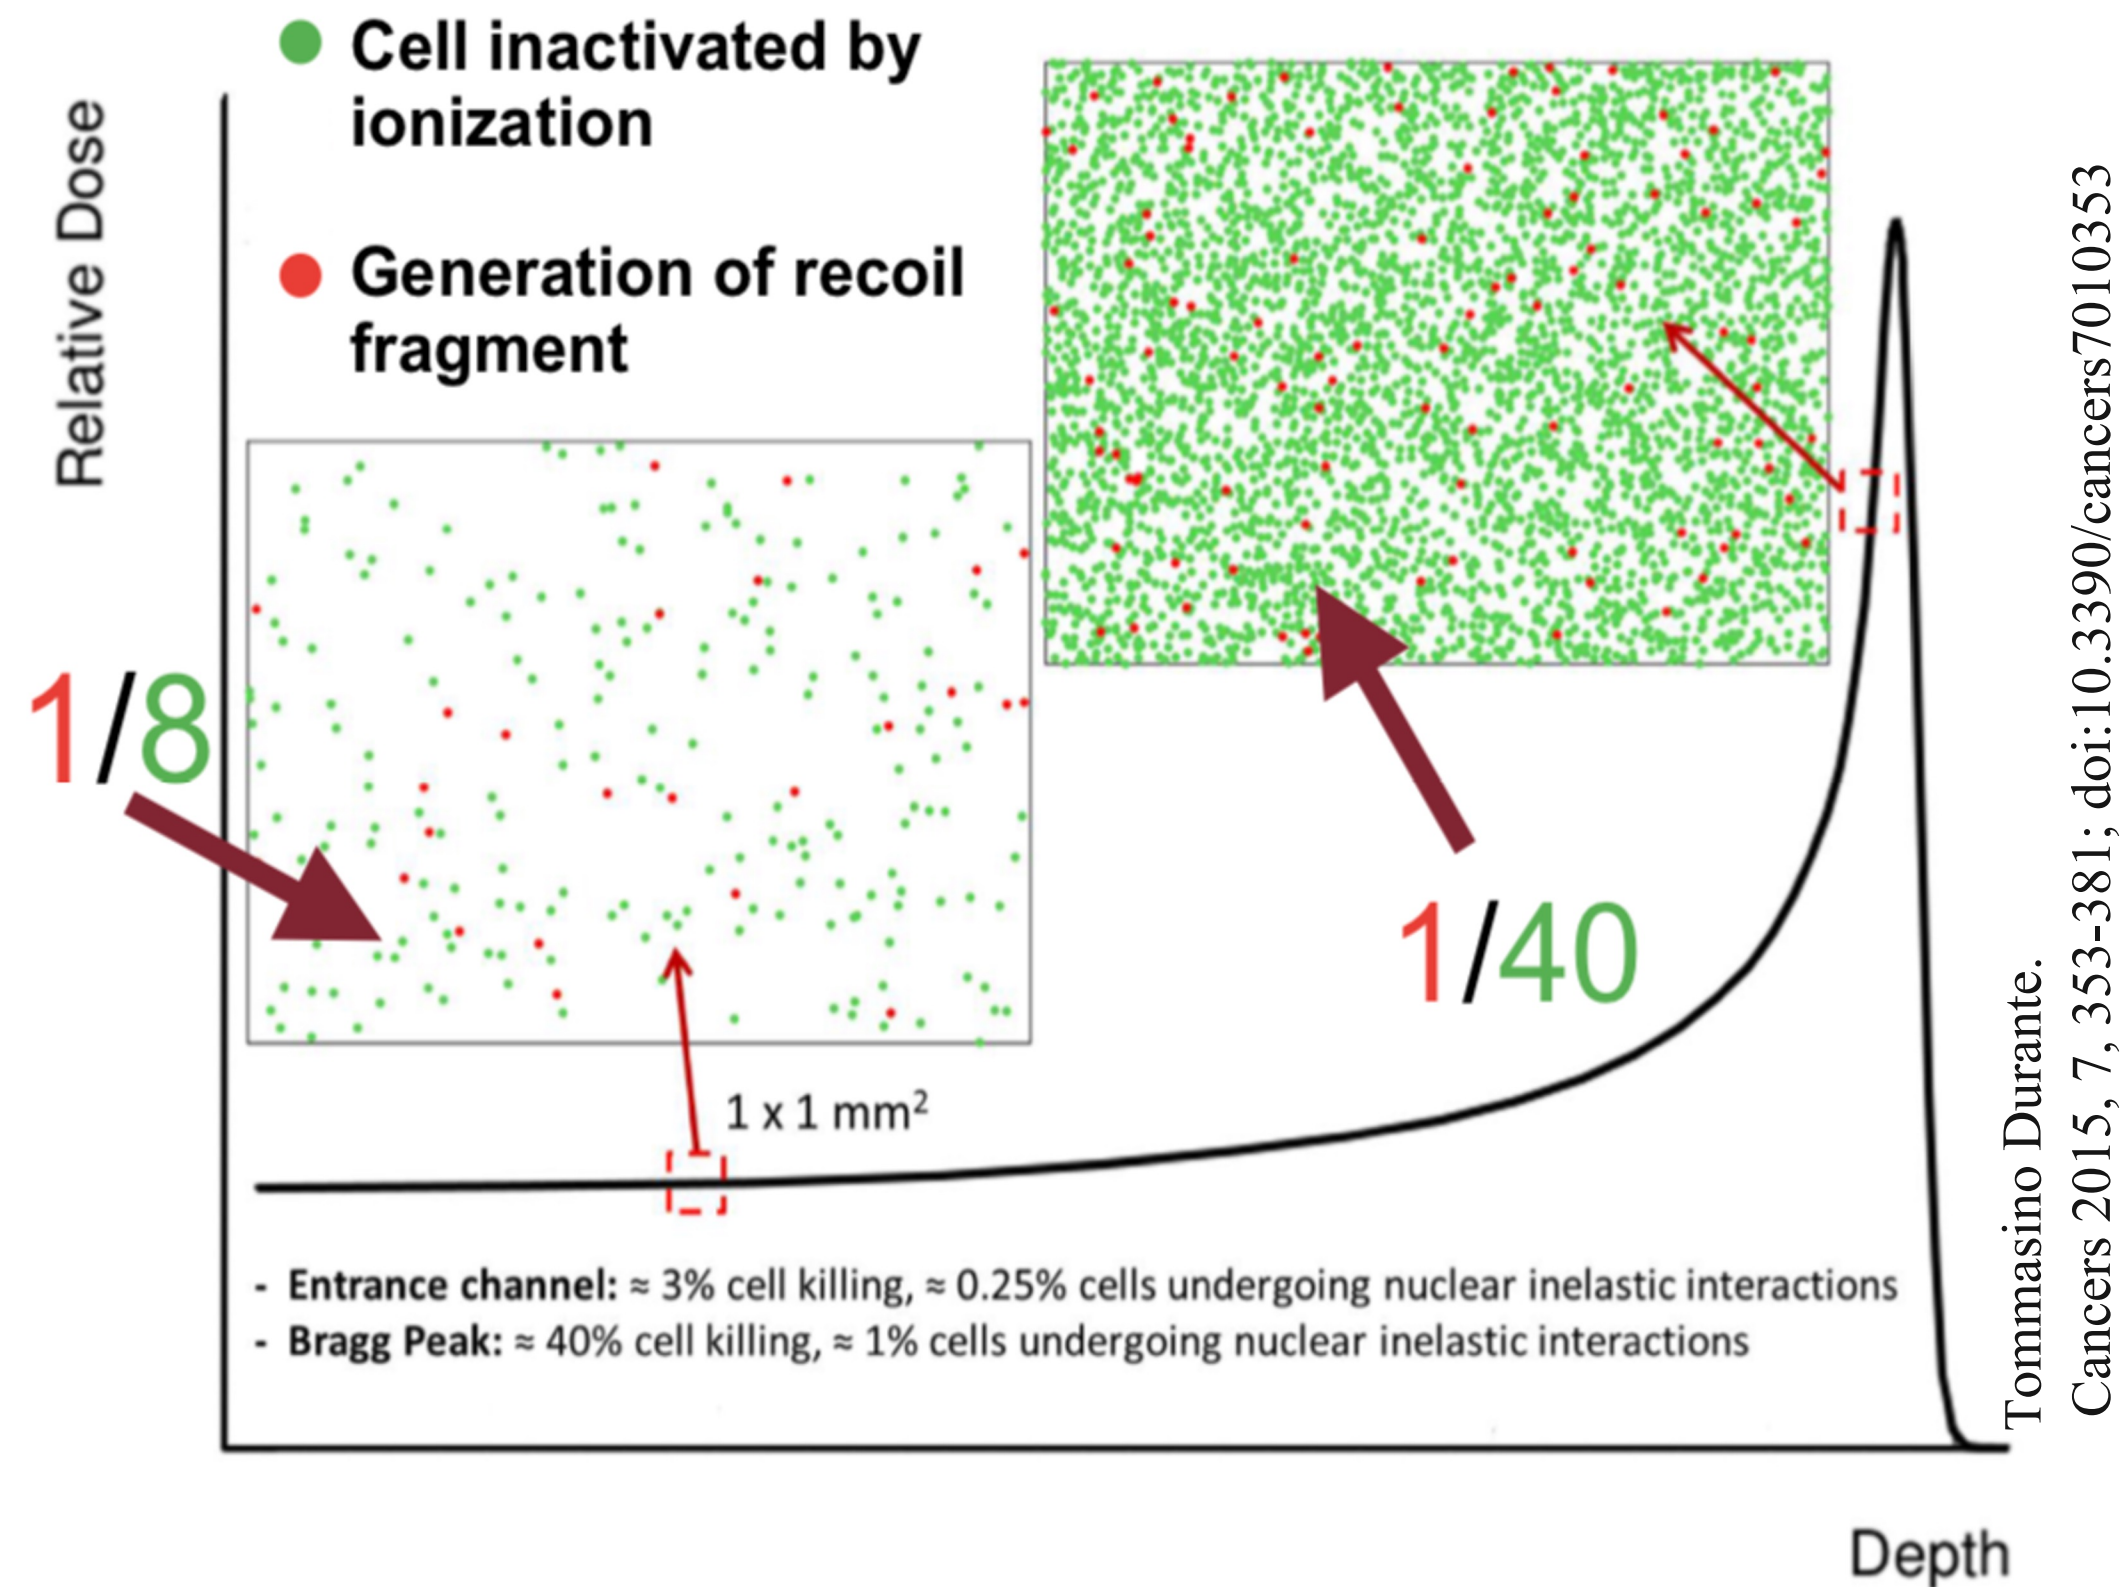

Can be of interest in proton-therapy:

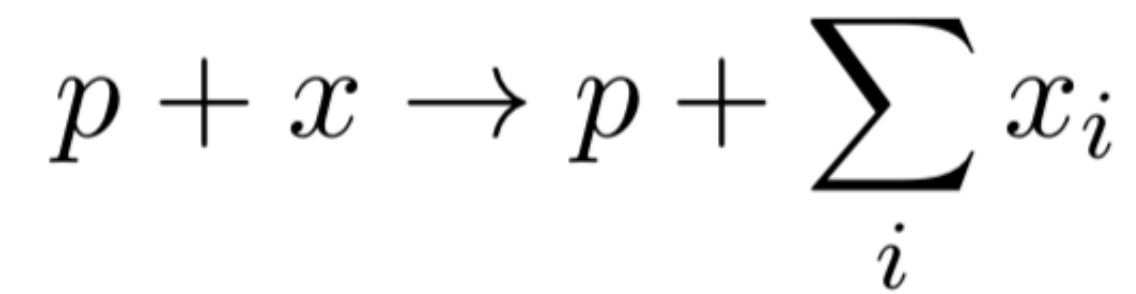

$$T_{x_i} \ll T_p$$


$$\left(\frac{dE}{dx}\right)_x \gg \left(\frac{dE}{dx}\right)_p$$

Target fragments have **high RBE** values

In clinical practice protons RBE = 1.1

➤ The particles produced in target **fragmentation**, especially the heavier fragments, are one of the causes contributing to the increase of proton RBE

Target fragmentation contribution

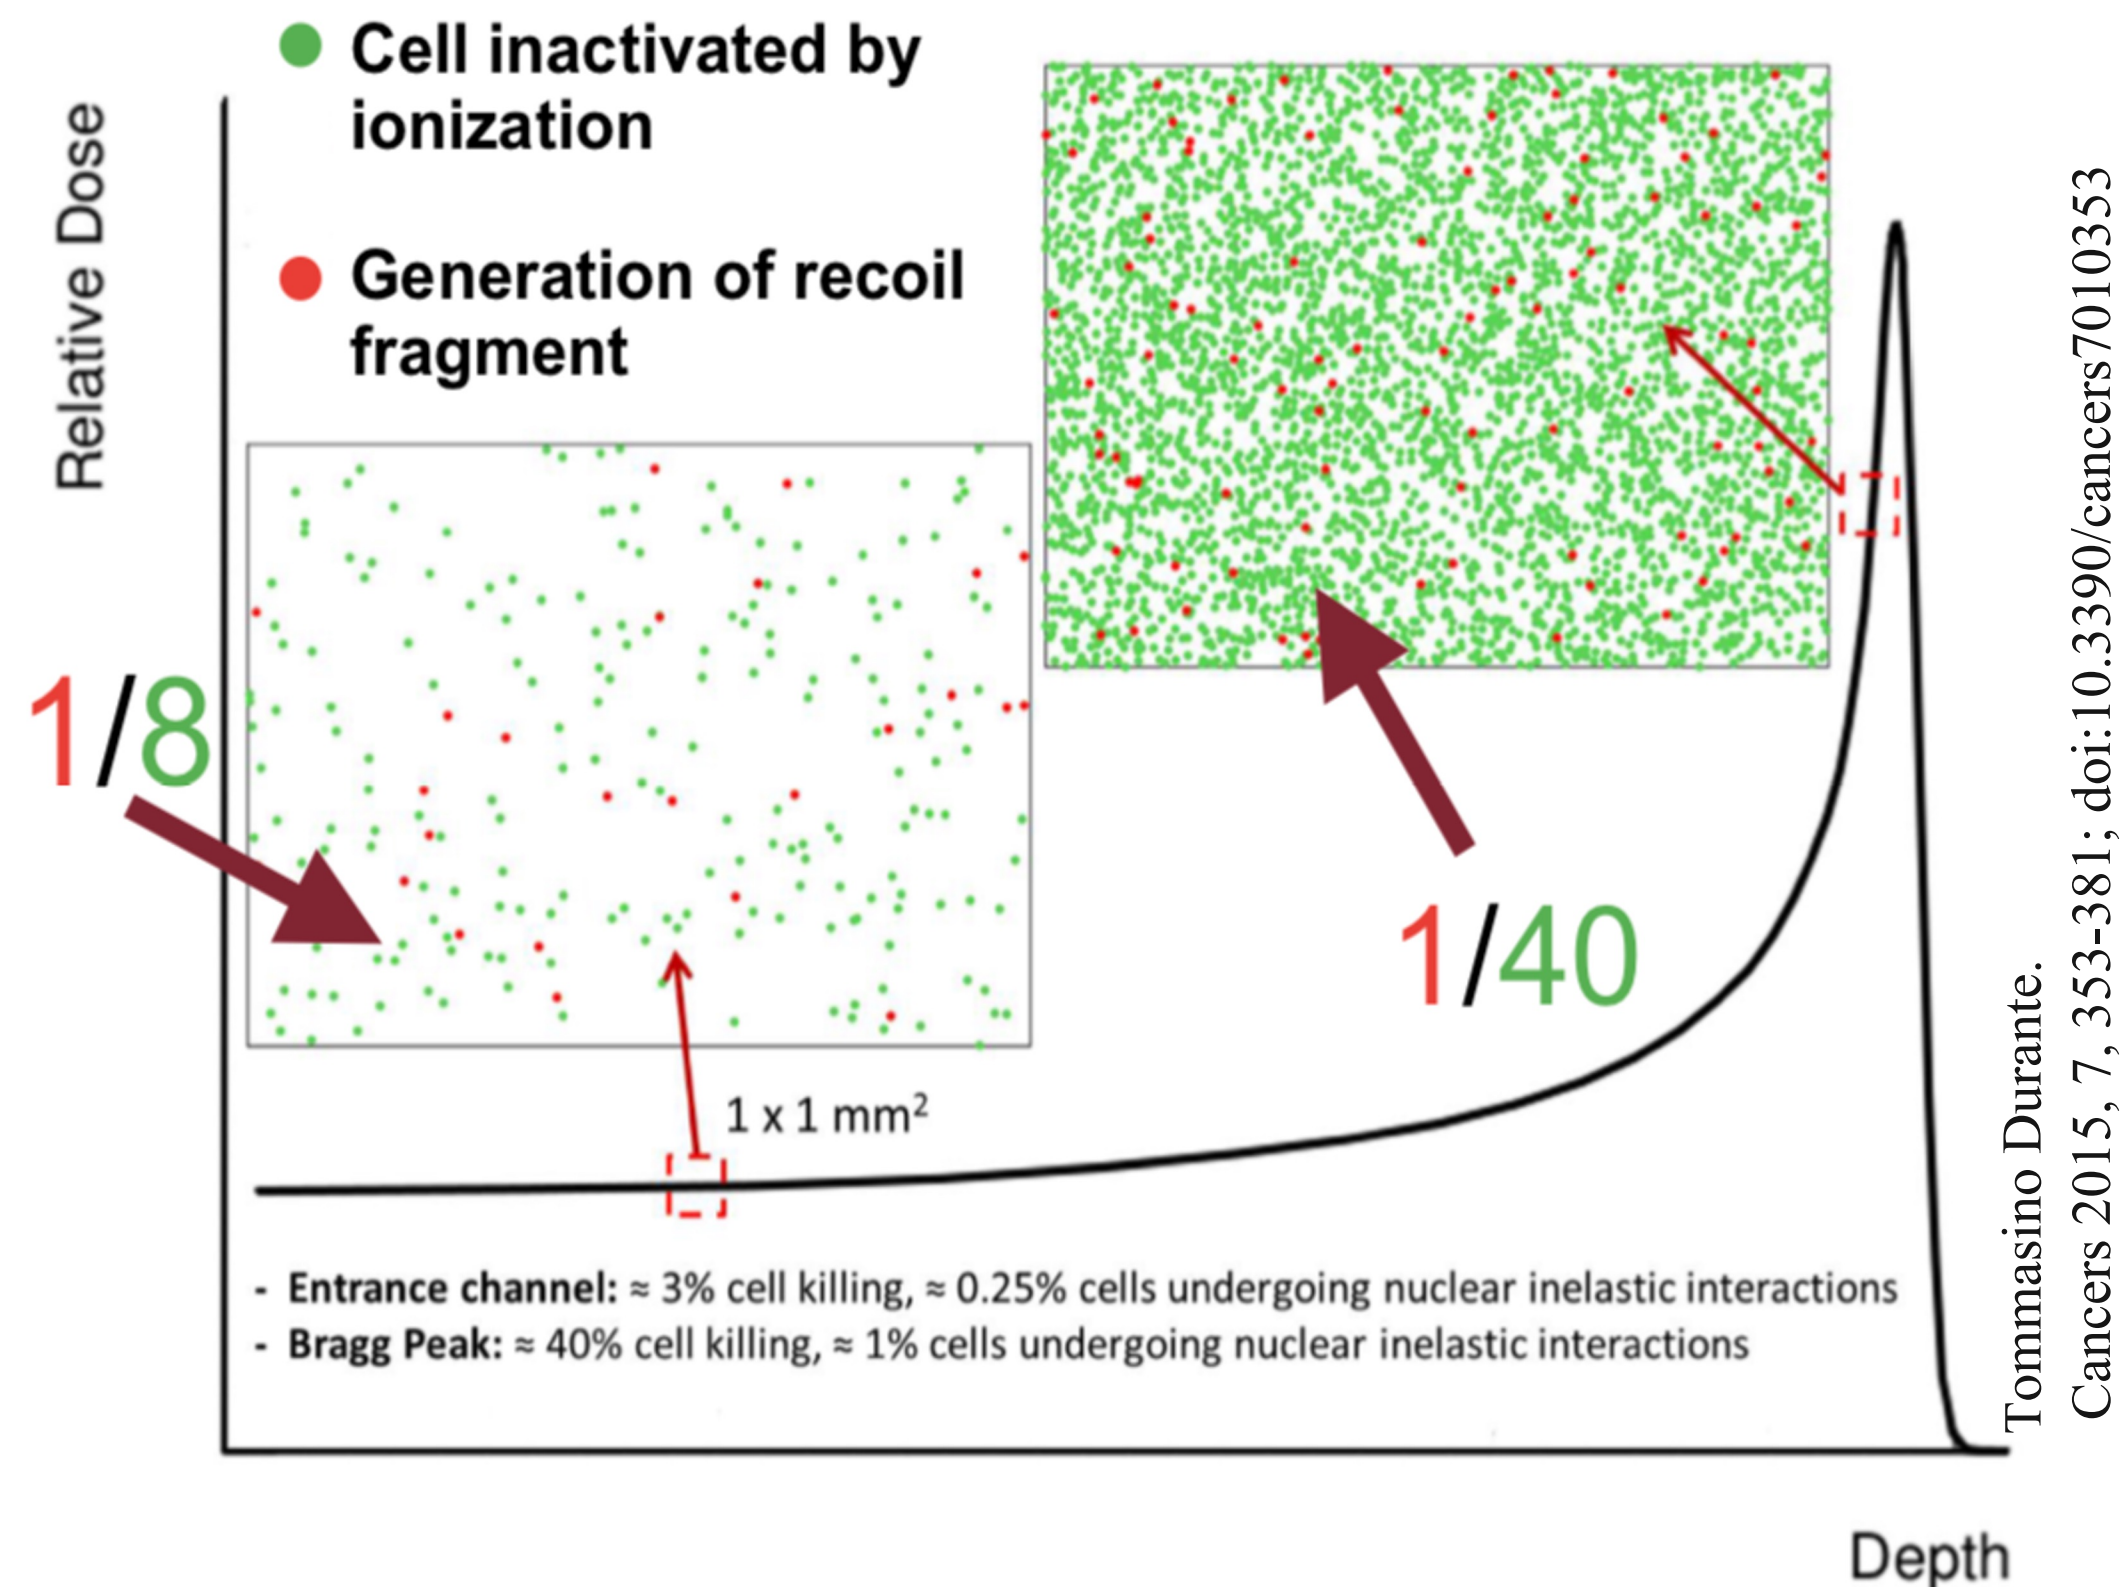

Expected average physical parameters for target fragments produced in water by a 180 MeV proton beam

Fragment	E (MeV)	LET (keV/μm)	Range (μm)
¹⁵ O	1.0	983	2.3
¹⁵ N	1.0	925	2.5
¹⁴ N	2.0	1137	3.6
¹³ C	3.0	951	5.4
¹² C	3.8	912	6.2
¹¹ C	4.6	878	7.0
¹⁰ B	5.4	643	9.9
⁸ Be	6.4	400	15.7
⁶ Li	6.8	215	26.7
⁴ He	6.0	77	48.5
³ He	4.7	89	38.8
² H	2.5	14	68.9

GoodHead D.T.. Radiation protection dosimetry. 122. 2006


➤ The particles produced in target **fragmentation**, especially the heavier fragments, are one of the causes contributing to the increase of proton RBE

FragmentatiOn Of Target (FOOT) experiment

Measurements of target and projectile fragmentation cross section relevant for **PT** and for **Radio Protection in Space** applications.



TPS in Particle Therapy

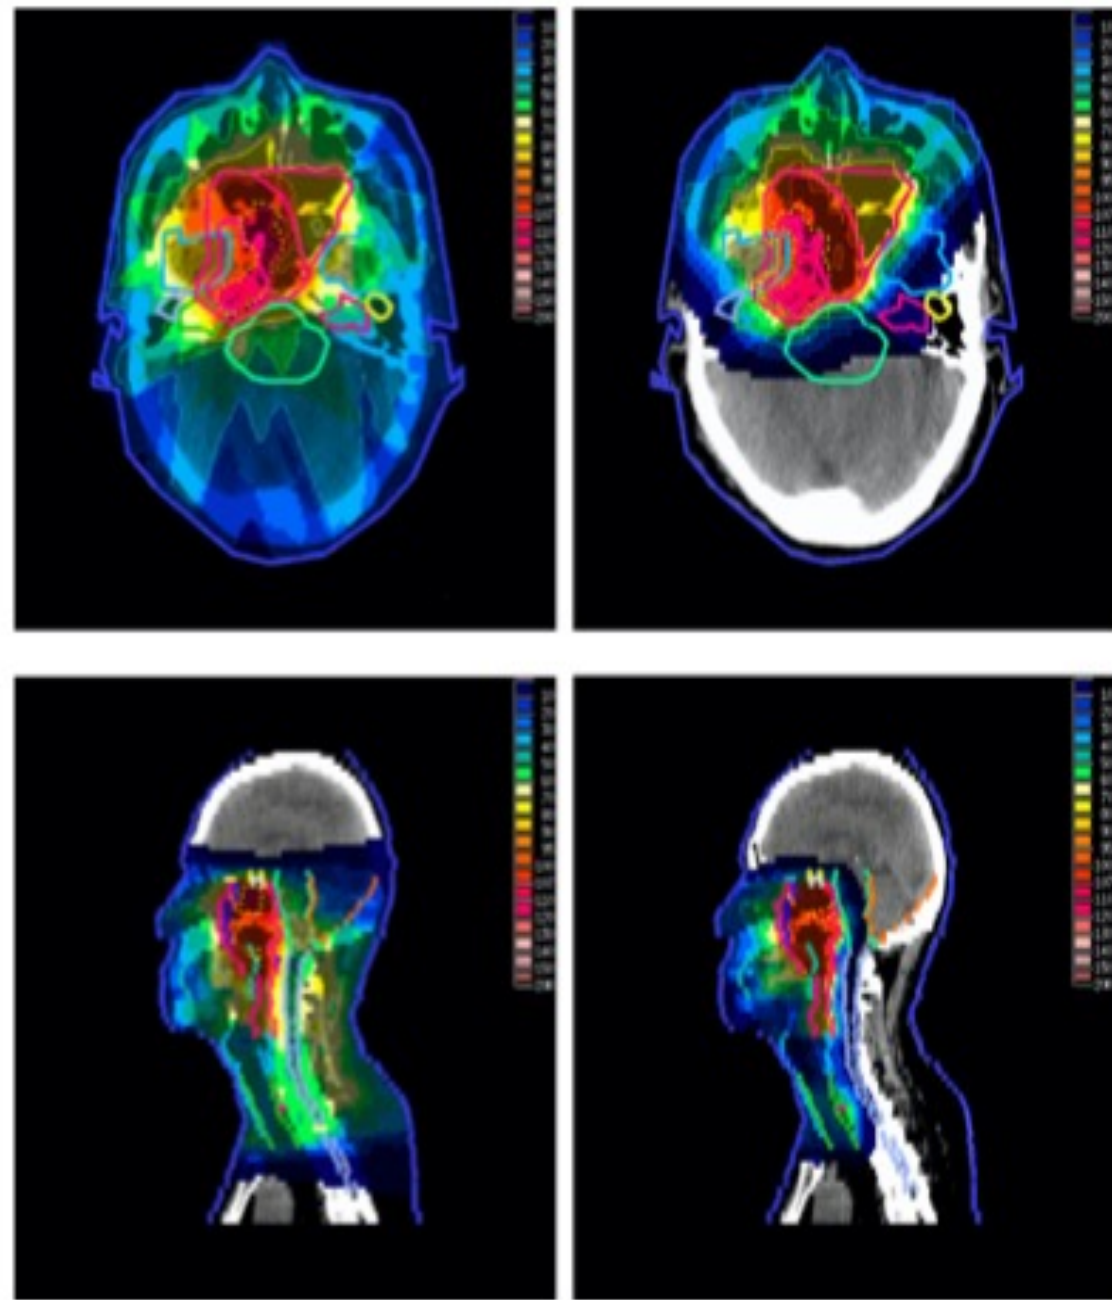


- Projectile fragmentation of ^4He , ^{12}C , ^{16}O beams in the energy range 100÷500 MeV/u interaction with the main constituents of human body (H, C, O, Ca)
- ^{12}C and ^{16}O target fragmentation induced by 50÷250 MeV proton beams

FragmentatiOn Of Target (FOOT) experiment


Measurements of target and projectile fragmentation cross section relevant for **PT** and for **Radio Protection in Space** applications.

TPS in Particle Therapy

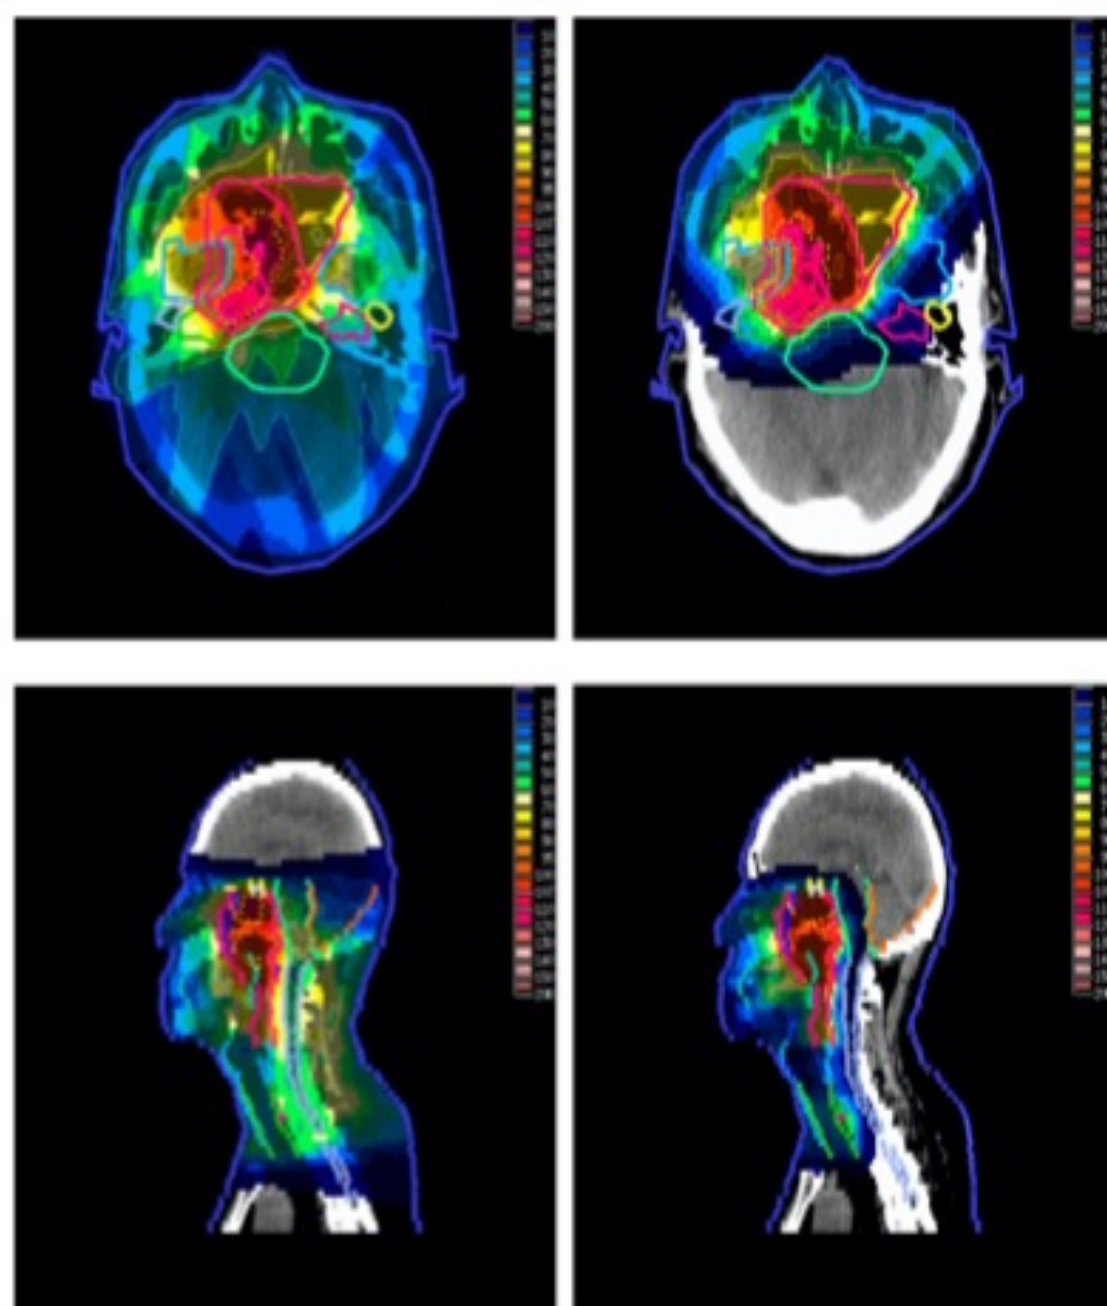

- Projectile fragmentation of ^4He , ^{12}C , ^{16}O beams in the energy range $100\div 500$ MeV/u interaction with the main constituents of human body (H, C, O, Ca)
- ^{12}C and ^{16}O target fragmentation induced by $50\div 250$ MeV proton beams

Radioprotection in space

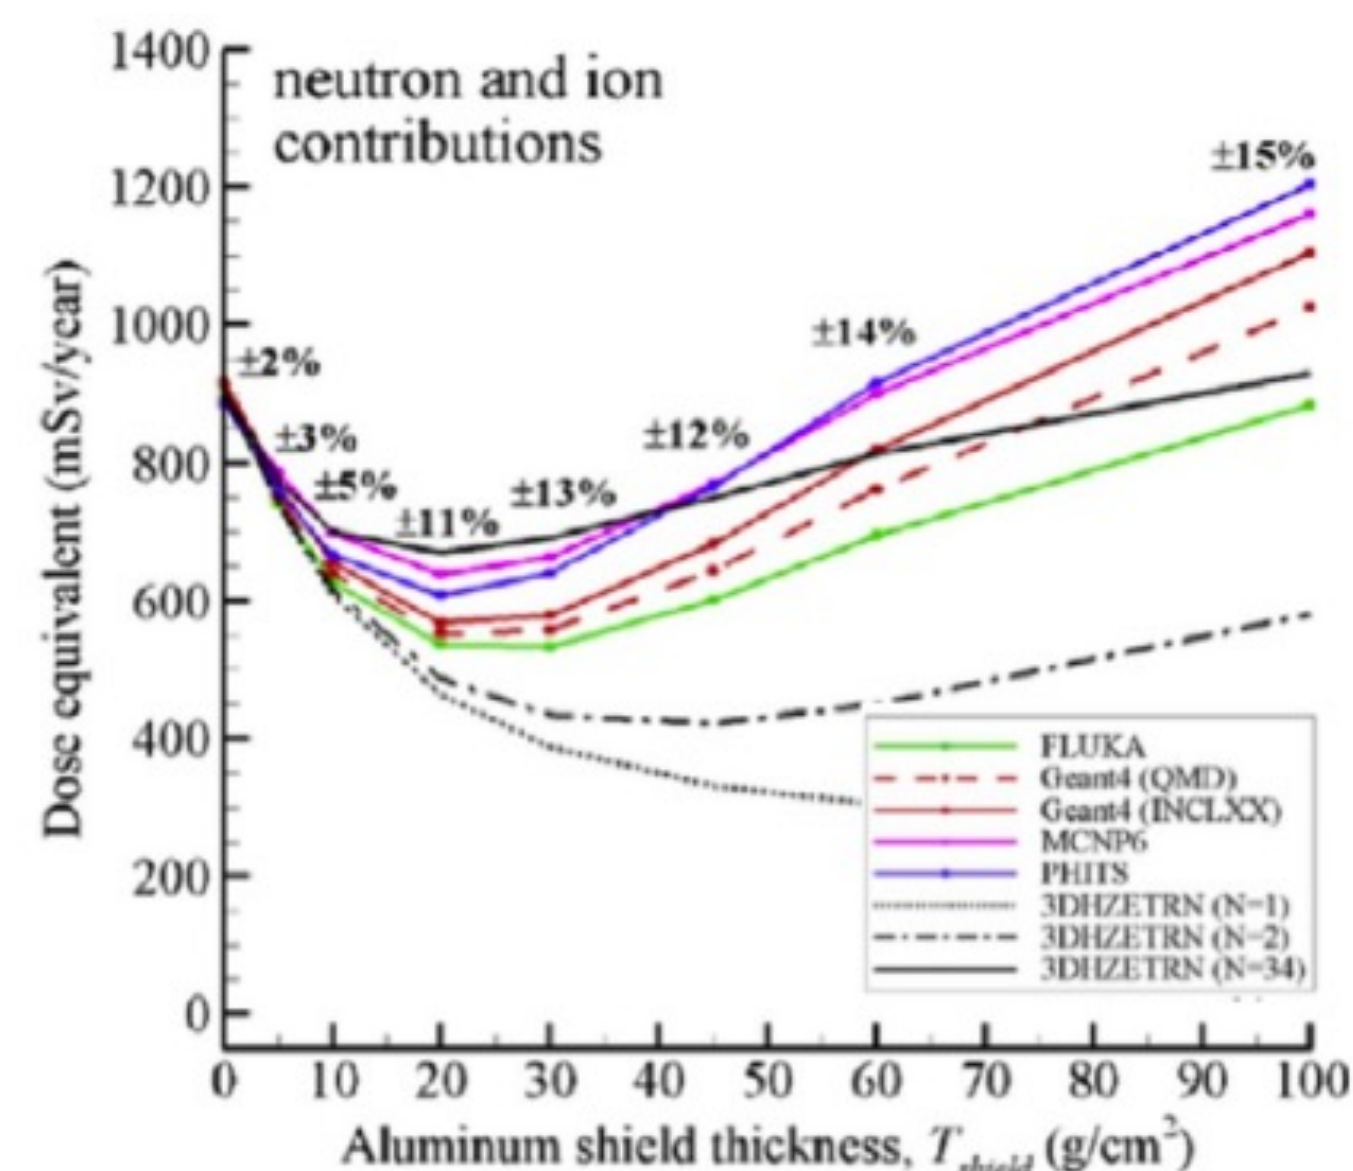

Slaba TC, Bahadori AA, Reddell BD, Singletary RC, Cloudsley MS, Blattnig SR. Optimal shielding thickness for galactic cosmic ray environments. *Life Sci Space Res.* (2017) 12: 1–15. doi:10.1016/j.lssr.2016.12.003.

Same PT ions (plus ions up to ^{56}Fe) interacting with hydrogen-rich targets, of interest for **shieldings**, at the increased energy range of $100\div 800$ MeV/u


Strategy for target fragmentation measurement

Target fragments have a very **low energy** and so a very **low range** that make the detection really difficult.

By applying a Lorentz boost it is possible to switch from the laboratory frame to the “patient frame”

Needed high resolution in quantities entering in Lorentz Boost (p , E , ToF , θ) for **indirect kinematic approach** for proton beams induced target fragmentation

Direct kinematic

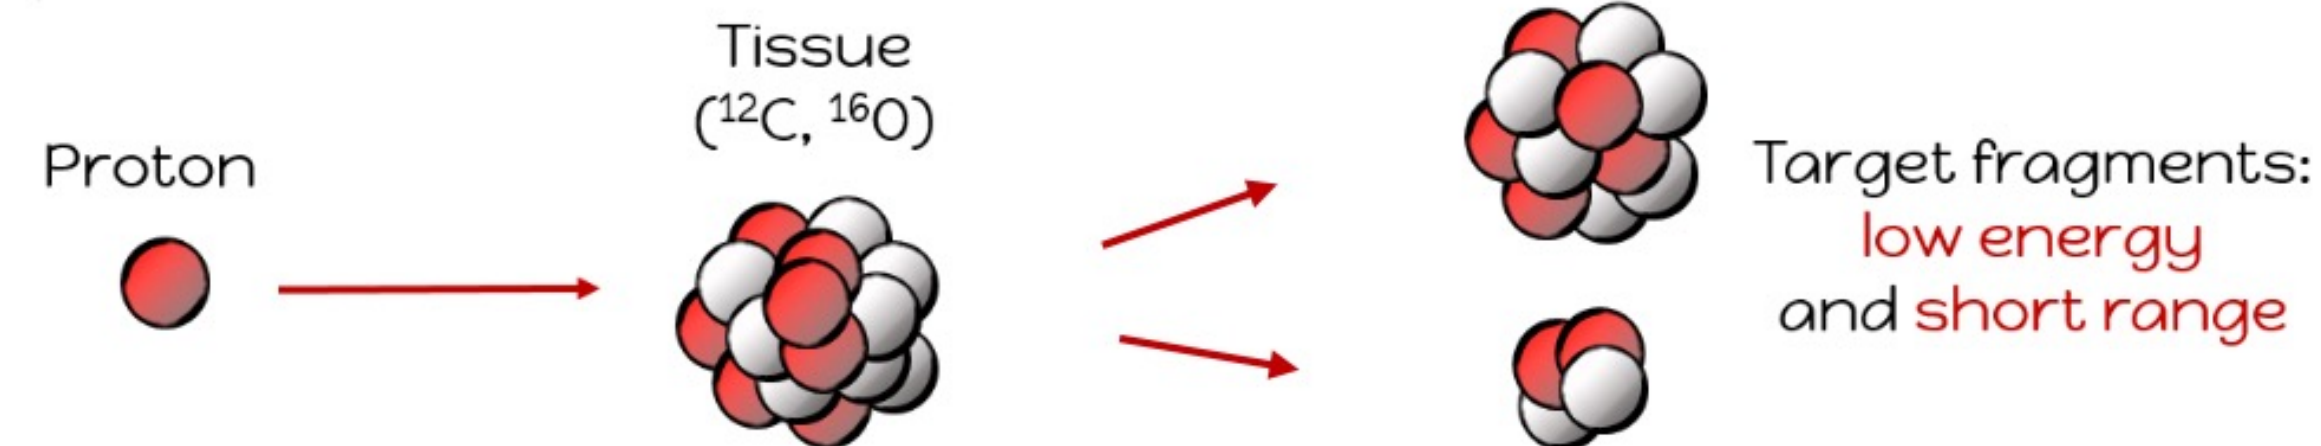

Inverse kinematic



With this strategy the fragmentation of **tissue-like ion beams** (mainly C and O) impinging on a **hydrogen enriched target** are studied **moving from the challenging measurement of target fragmentation to the easier case of projectile fragmentation**

FOOT physics program



Physics (*)	Application field	Beam	Target	Upper Energy (MeV/nucleon)	Kinematic approach	Interaction process
Target fragmentation	PT	¹² C	C, C ₂ H ₄	200	inverse	p+C
Target fragmentation	PT	¹⁶ O	C, C ₂ H ₄	200	inverse	p+C
Beam fragmentation	PT	⁴ He	C, C ₂ H ₄ , PMMA	250	direct	α+O α+H, α+O
Beam fragmentation	PT	¹² C	C, C ₂ H ₄ , PMMA	400	direct	C+C, C+H, C+O
Beam fragmentation	PT	¹⁶ O	C, C ₂ H ₄ , PMMA	500	direct	O+C, O+H, O+O
Beam fragmentation	Space	⁴ He	C, C ₂ H ₄ , PMMA	800	direct	α+C, α+H, α+O
Beam fragmentation	Space	¹² C	C, C ₂ H ₄ , PMMA	800	direct	C+C, C+H, C+O
Beam fragmentation	Space	¹⁶ O	C, C ₂ H ₄ , PMMA	800	direct	O+C, O+H, O+O

Cross section of H and O targets will be got by subtraction from cross section on C target and composite targets:

- polyethylene (C₂H₄)
- polymethyl methacrylate (PMMA, C₅O₂H₈)

(*) Extension of the FOOT experiment to measure neutrons

Strategy for fragmentation measurement

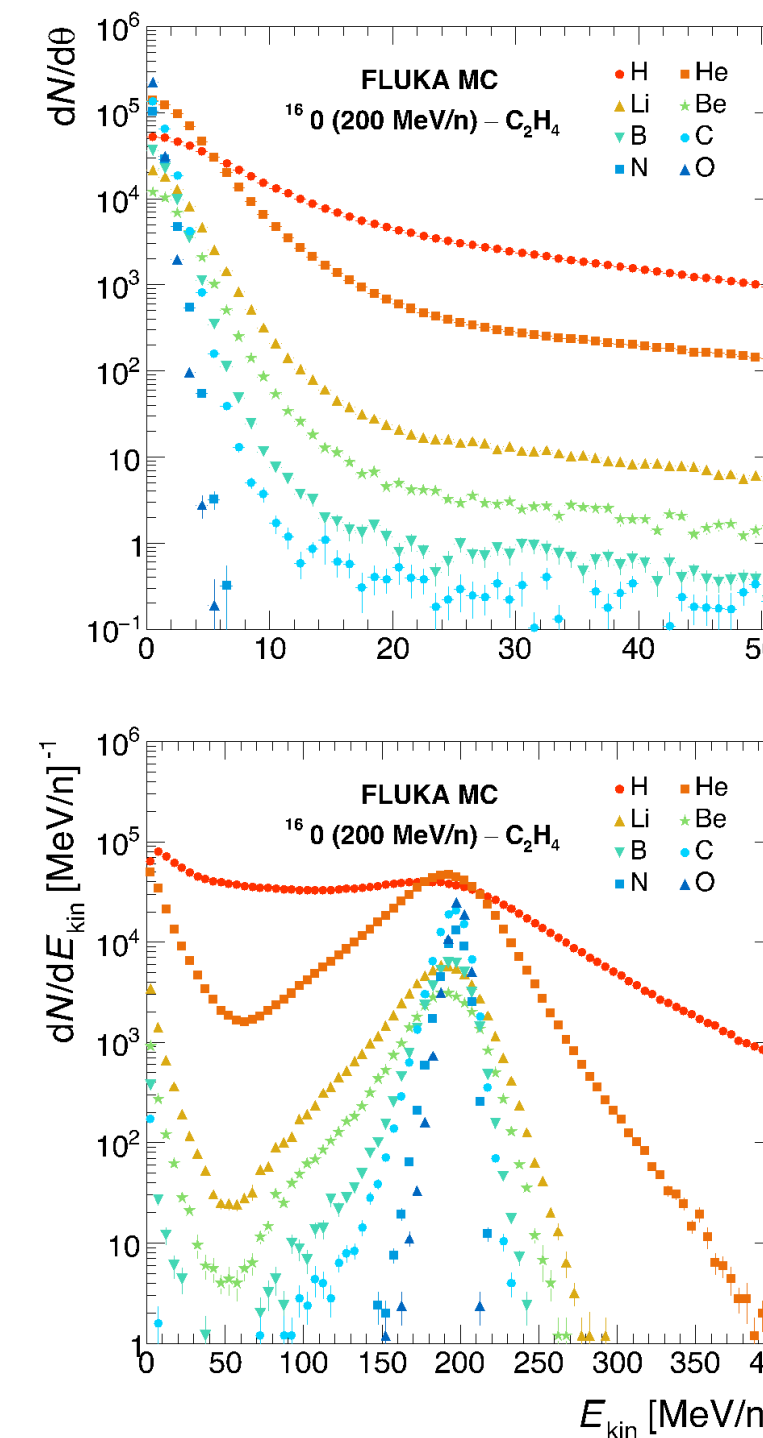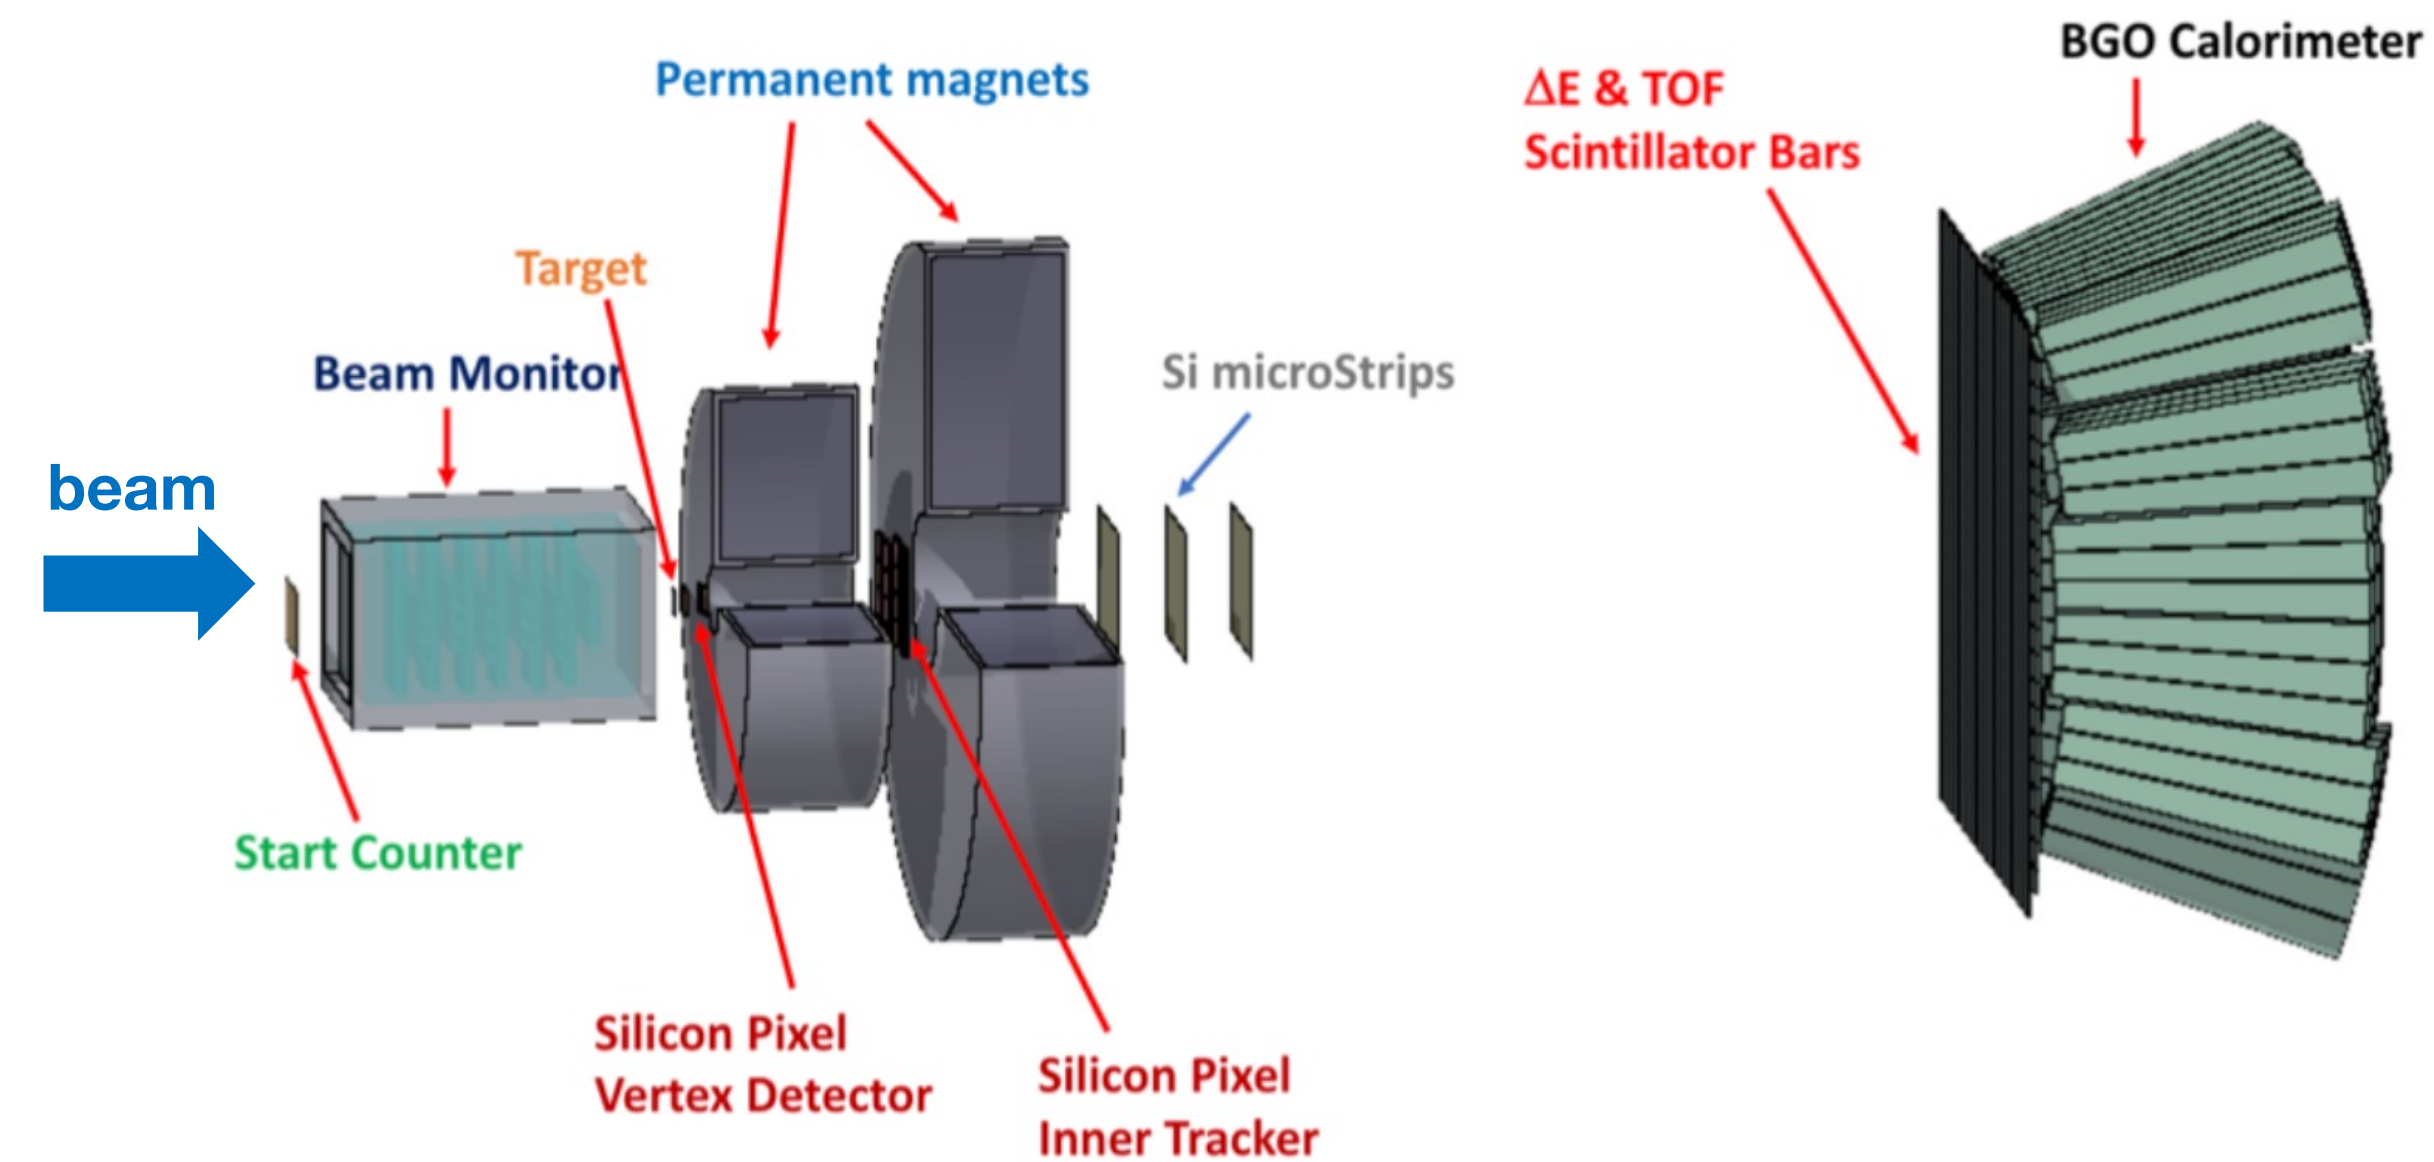

Radiobiological desiderata in PT:

- ✓ $d\sigma/dE$ for target fragm. in PT $\sim 10\%$
- ✓ $d^2\sigma/d\Omega dE$ for projectile fragm. in PT $\sim 5\%$
- ✓ $\Delta Z \sim 2-3\%$; $\Delta A \sim 5\%$



Required FOOT performances:

- ✓ $\sigma(p)/p < 5\%$
- ✓ $\sigma(E_{\text{kin}})/E_{\text{kin}} < 3\%$
- ✓ $\sigma(\Delta E)/\Delta E < 5\%$
- ✓ $\sigma(\text{TOF}) < 100 \text{ ps}$

- Fixed target experiments with magnetic spectrometer for the isotopic (charge and mass) identification of fragments
 - Thin beam detectors to minimize fragmentation out-of-targets
 - Redundance in mass measurement from (p, ToF) , $(E_{\text{kin}}, \text{ToF})$ and (E_{kin}, p) :

$$p = mc\beta\gamma \quad E_{\text{kin}} = mc^2(\gamma - 1) \quad E_{\text{kin}} = \sqrt{p^2 c^2 + m^2 c^4} - mc^2$$

Strategy for fragmentation measurement

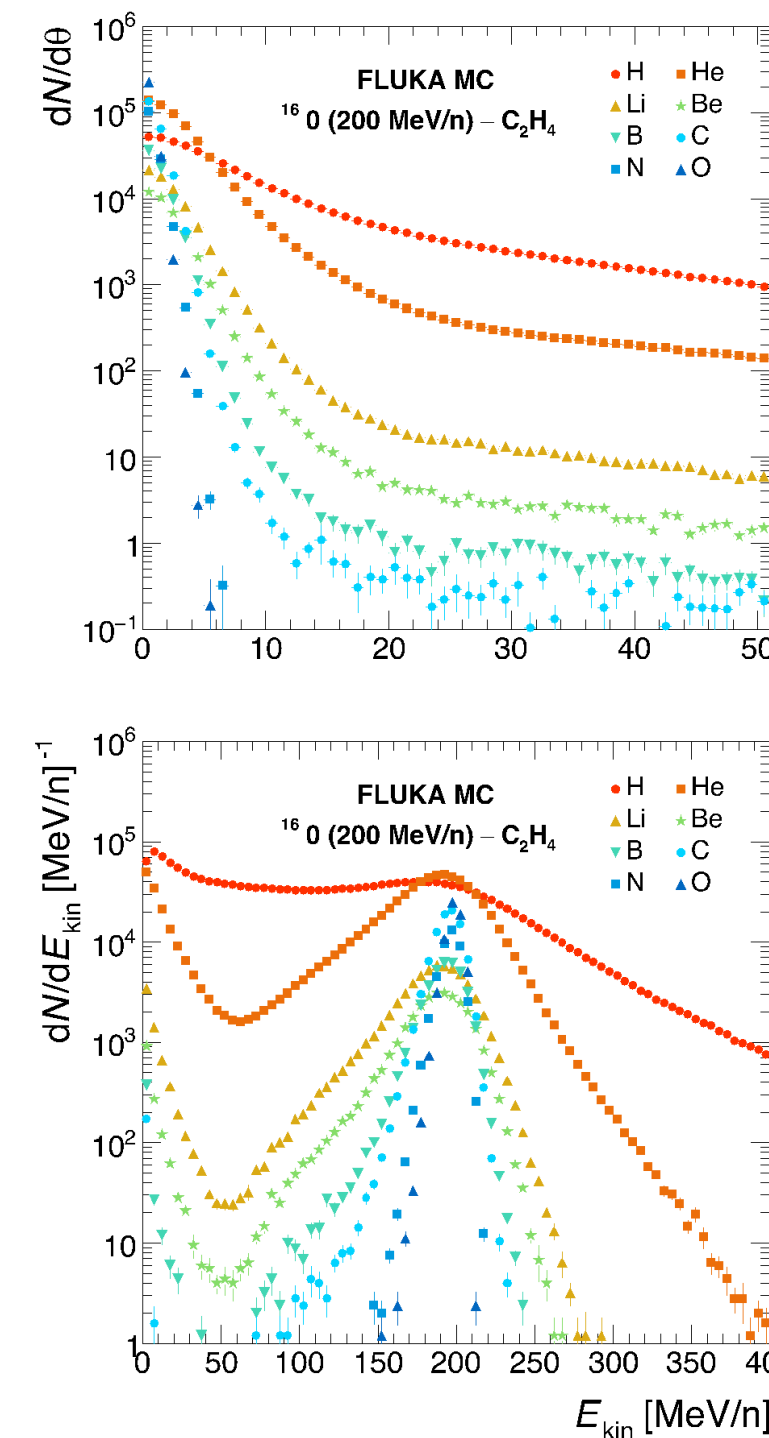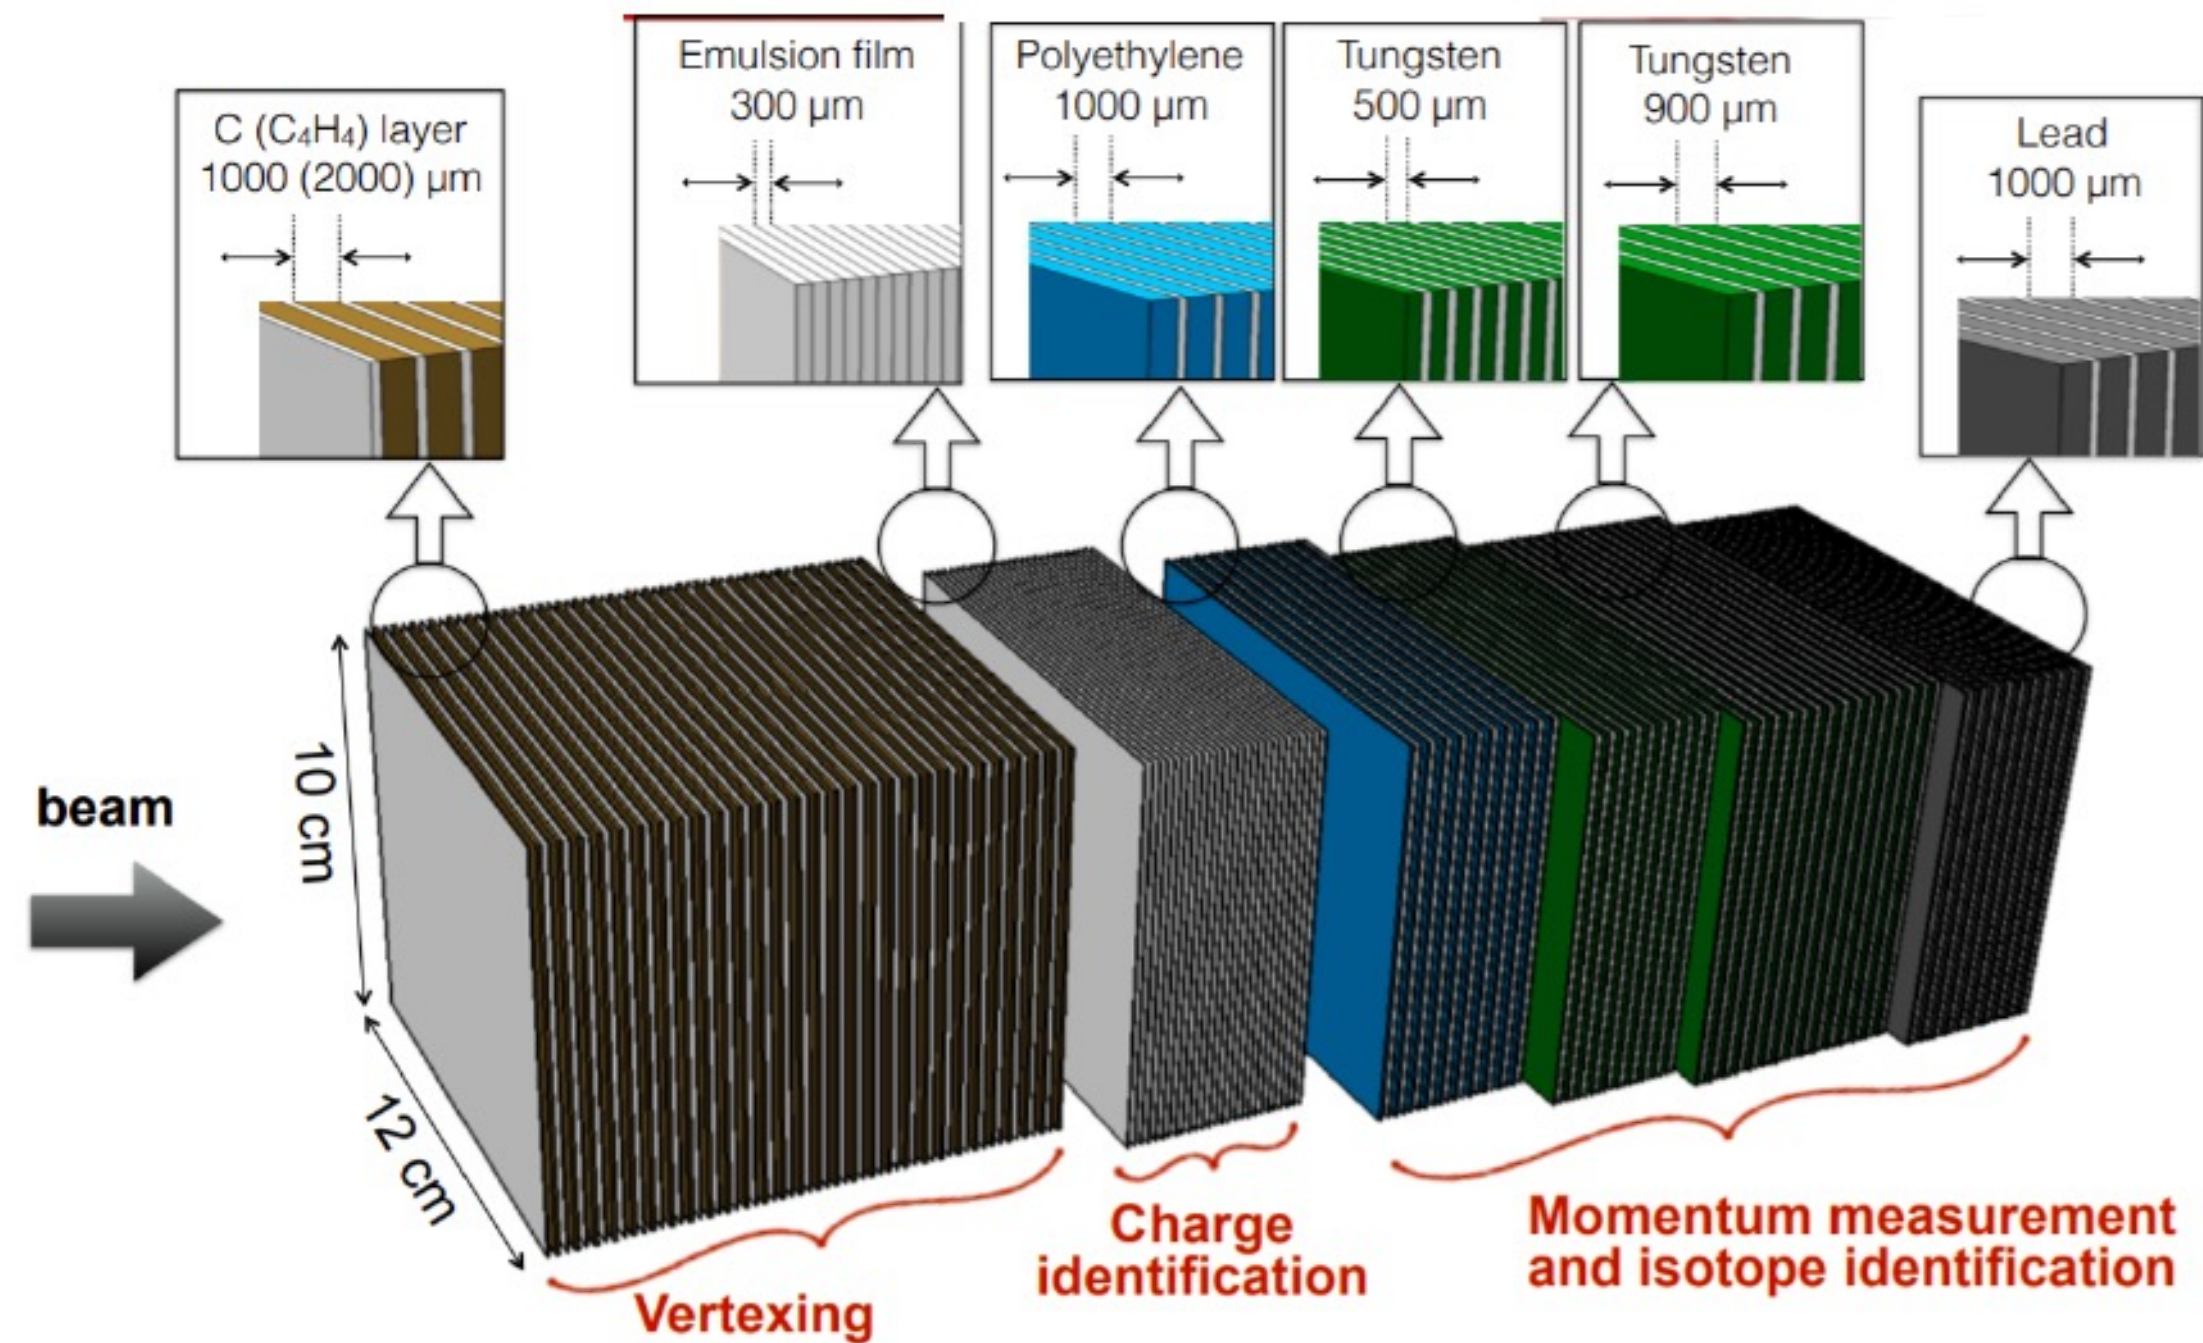


Radiobiological desiderata in PT:

- ✓ $d\sigma/dE$ for target fragm. in PT ~ 10%
- ✓ $d^2\sigma/d\Omega dE$ for projectile fragm. in PT ~ 5%
- ✓ $\Delta Z \sim 2-3\%$; $\Delta A \sim 5\%$

Emulsion spectrometer with high angular acceptance ($<70^\circ$) optimized for fragments with $Z < 3$:

- **Vertexing region:** emulsion films alternated with target layers to identify the interaction vertices
- **Charge id. region:** only emulsion films exploited for the charge id. with a refreshing procedure
- **Absorbing region:** emulsion and absorber layers for the momentum and mass id., exploiting the track length and the Multiple Coulomb Scattering effect


FOOT detector

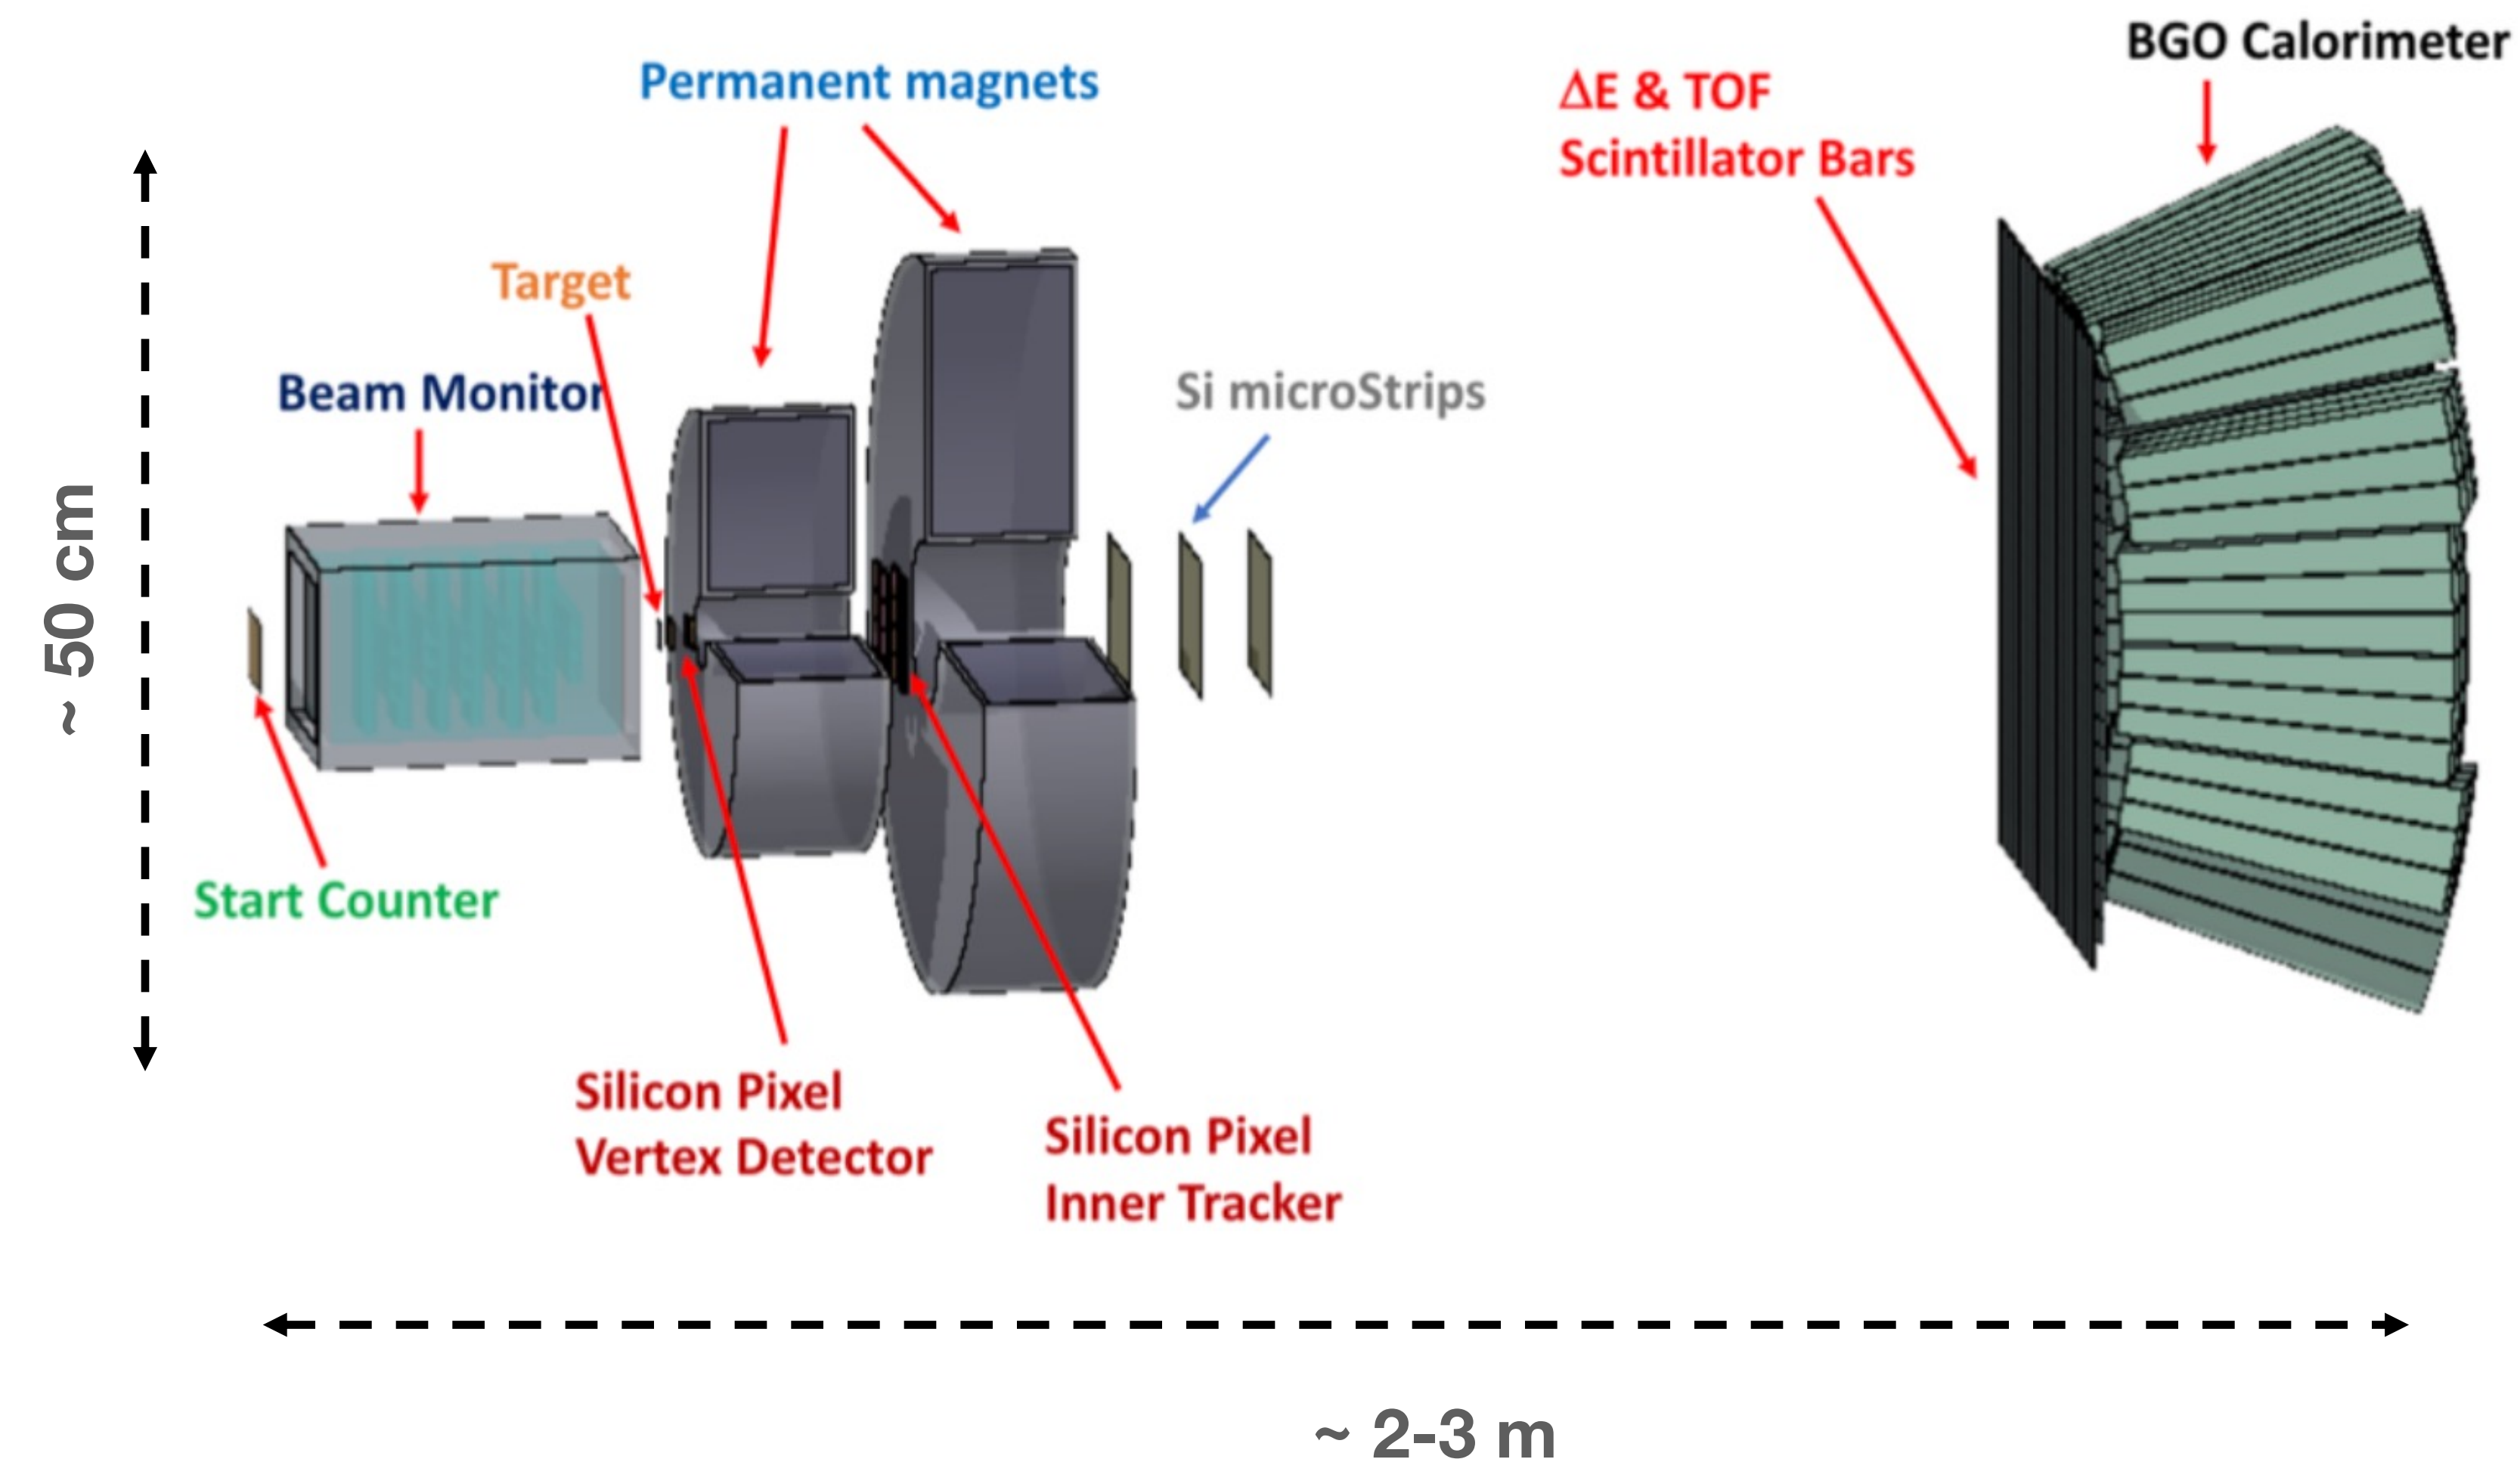

The FOOT detector is a movable set-up to fit the experimental rooms dimensions of different PT treatment centers / experimental facility (CNAO, HIT, GSI) with ions beams.

Limited acquisition time and available space ("table top experiment")

FOOT detector

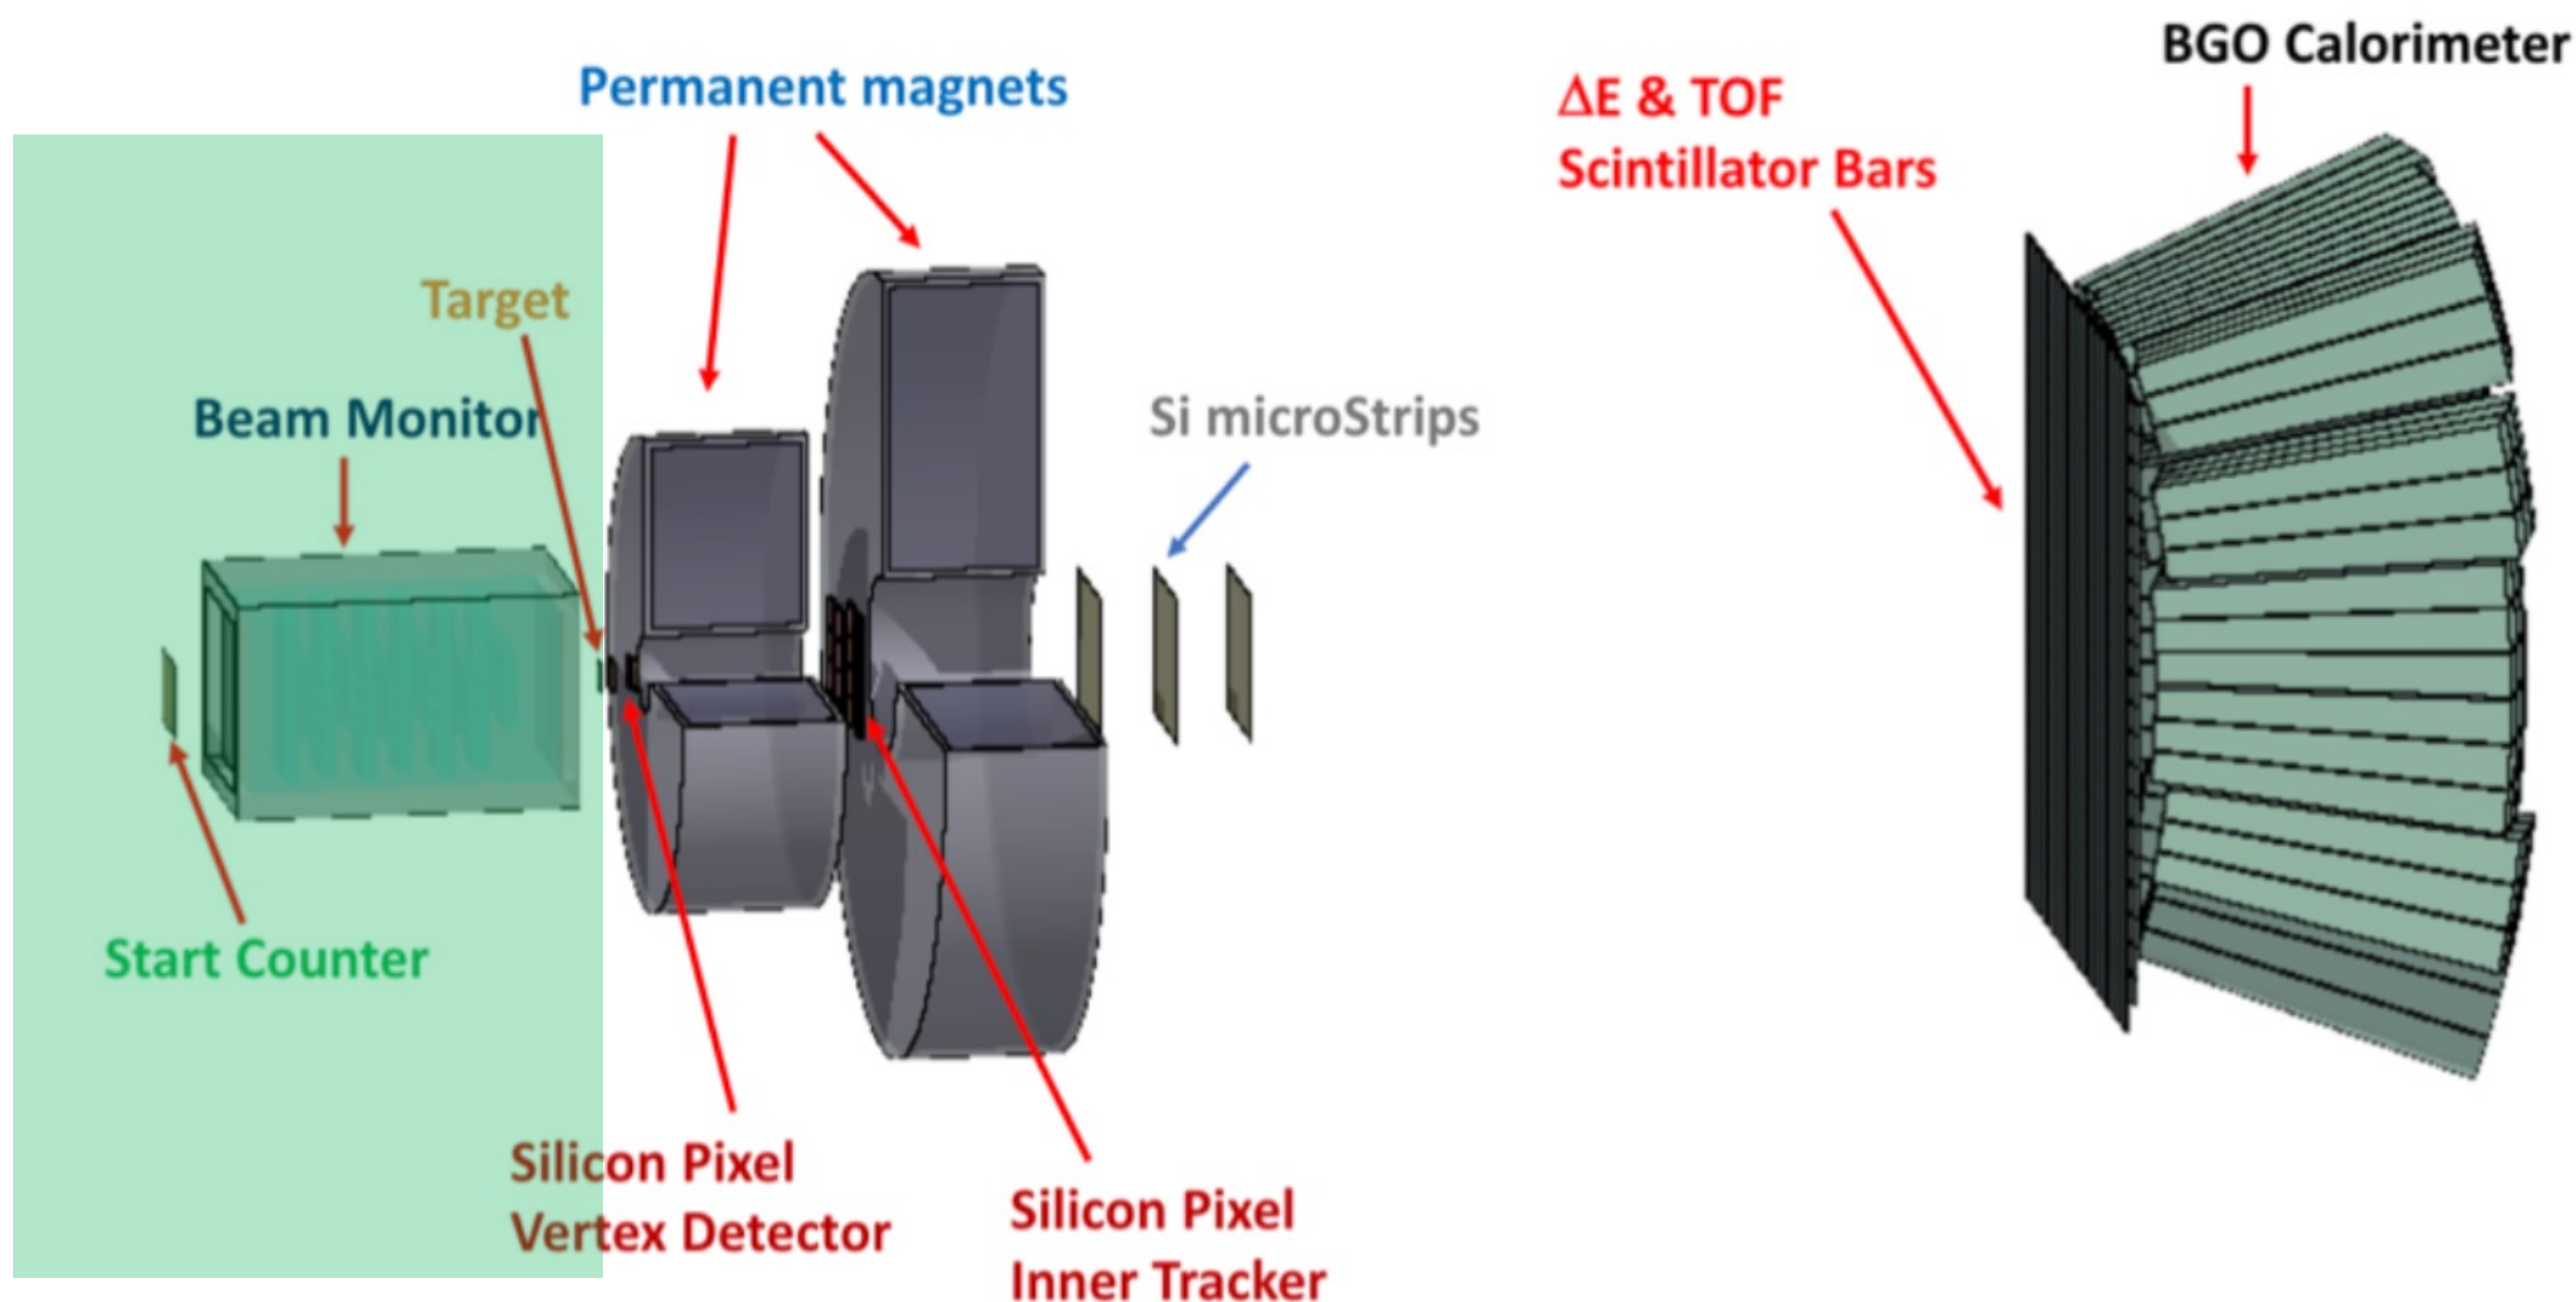

The FOOT detector is a movable set-up to fit the experimental rooms dimensions of different PT treatment centers / experimental facility (CNAO, HIT, GSI) with ions beams.




Limited acquisition time and available space ("table top experiment")

Pre-target region

- Very thin plastic scintillator ($250\ \mu\text{m}$) for TOF measurement and trigger
- Drift chamber (12 xy wire layers) for the beam direction and position measurement


FOOT detector

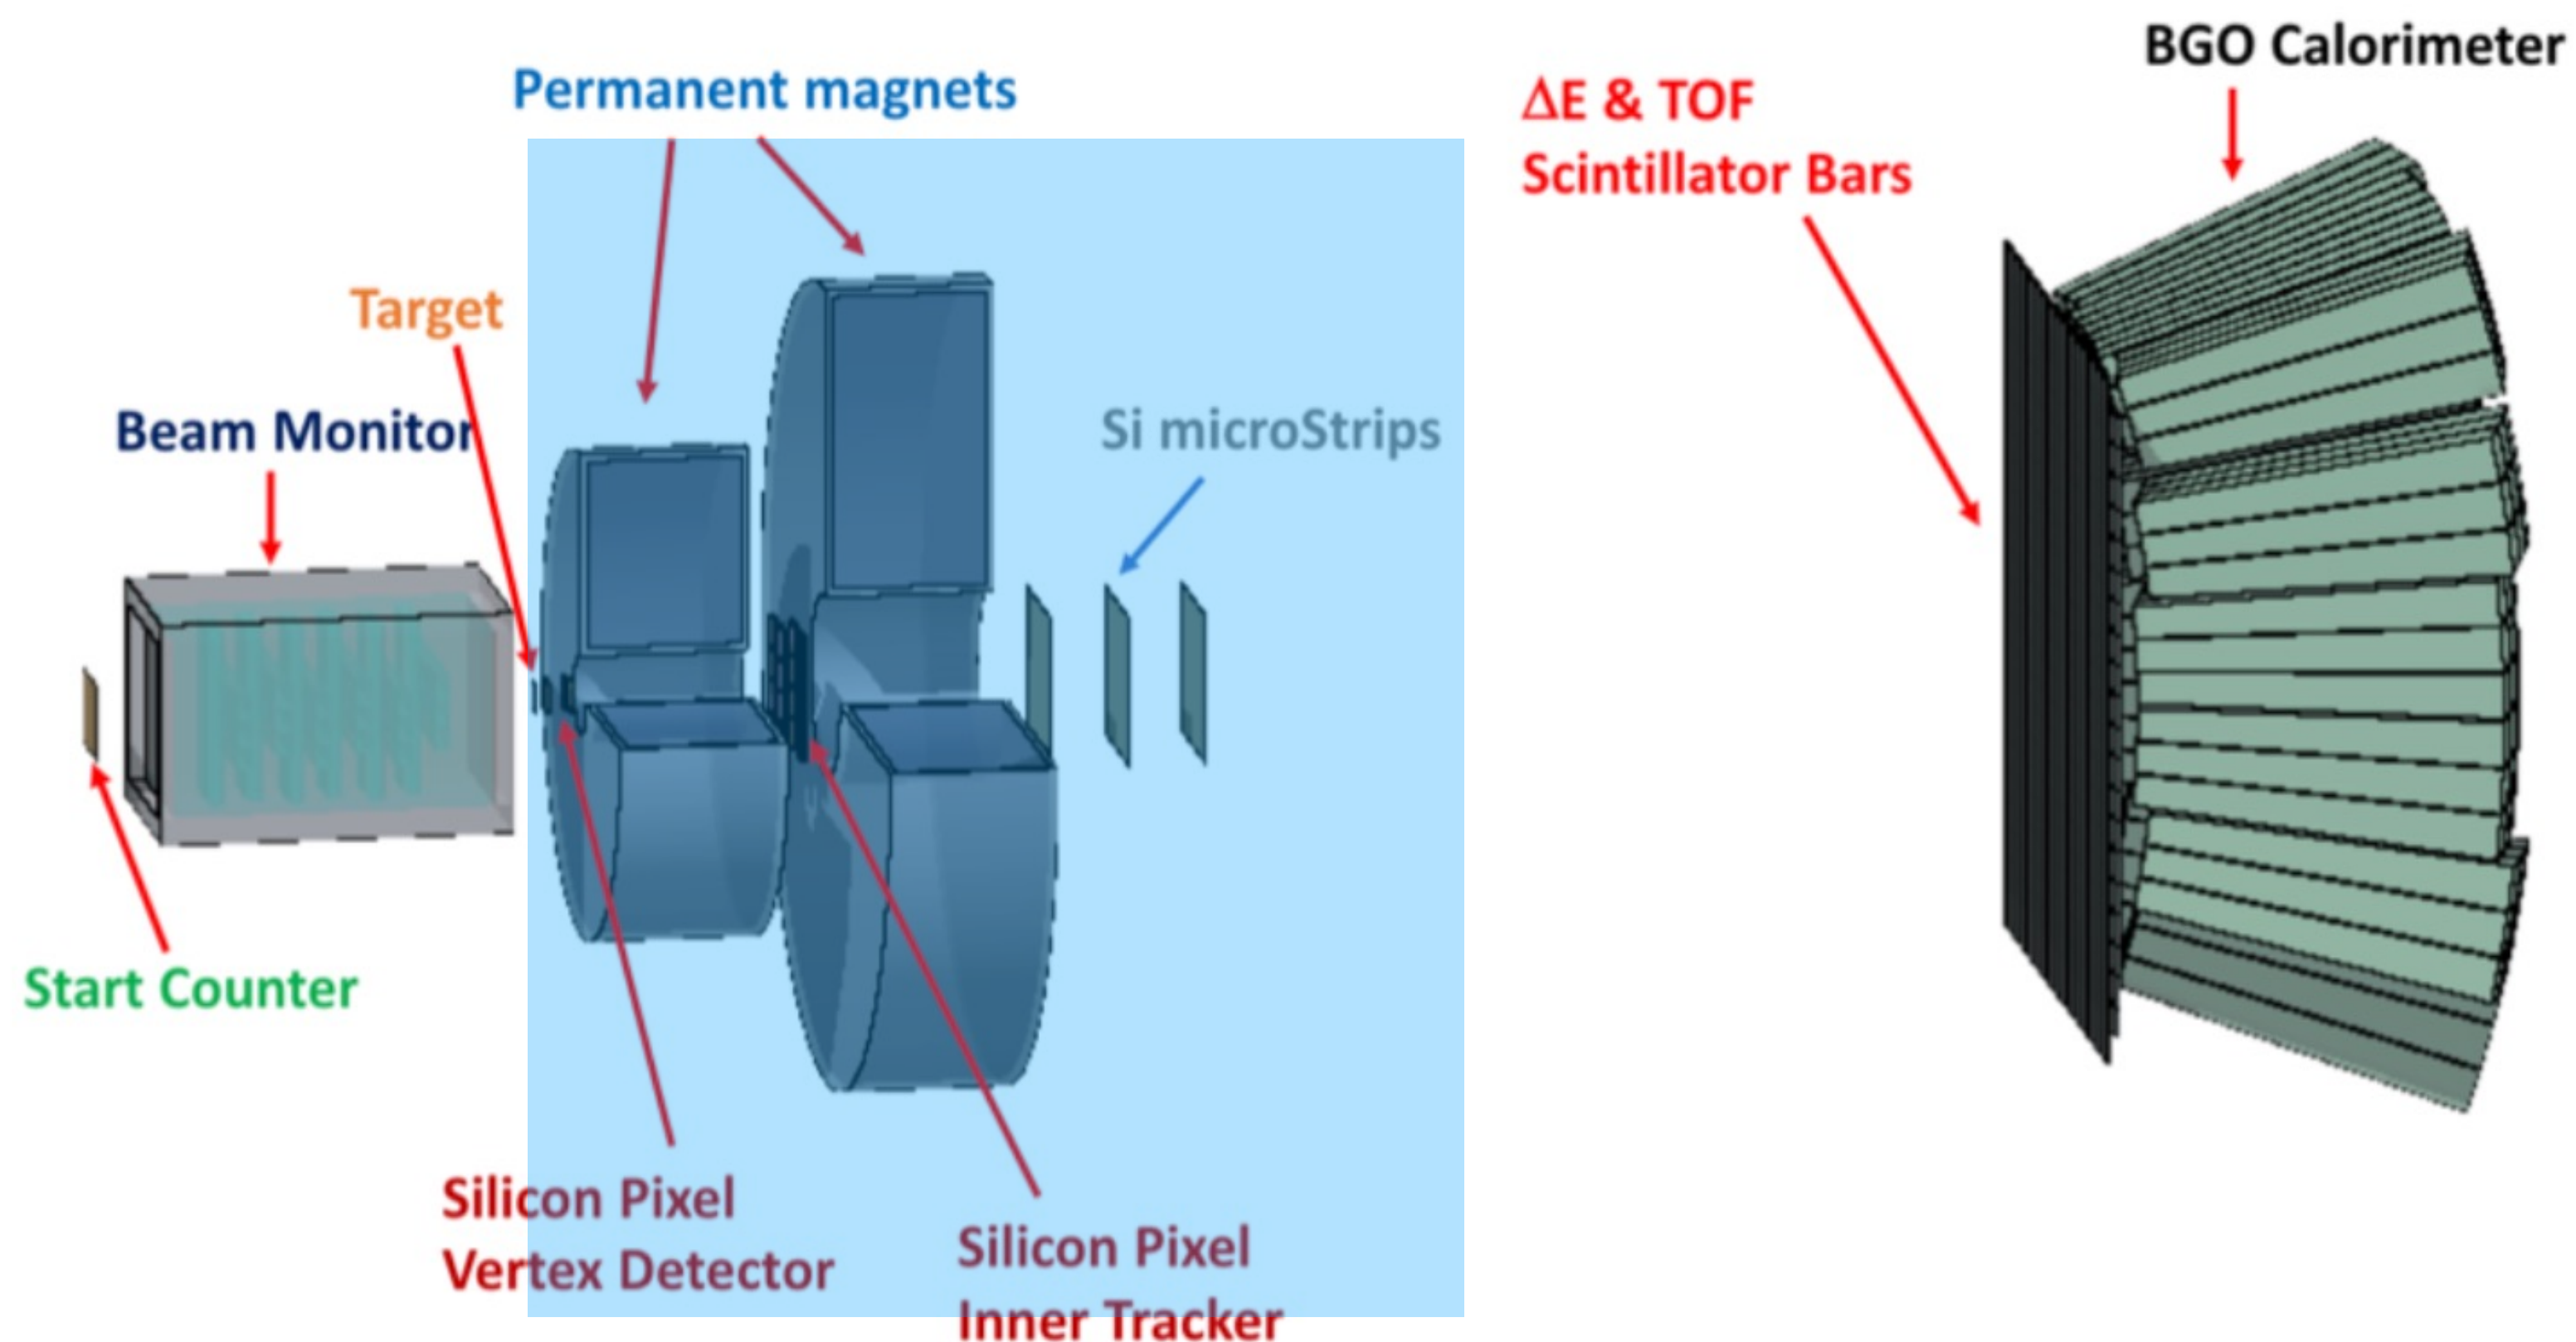


Tracking and magnetic region

- Permanent magnet in Halbach configuration $B_{MAX} \sim 1.4$ T
- MAPS (M-28) and micro strip silicon detector (MSD) for tracking and momentum reconstruction

The FOOT detector is a movable set-up to fit the experimental rooms dimensions of different PT treatment centers / experimental facility (CNAO, HIT, GSI) with

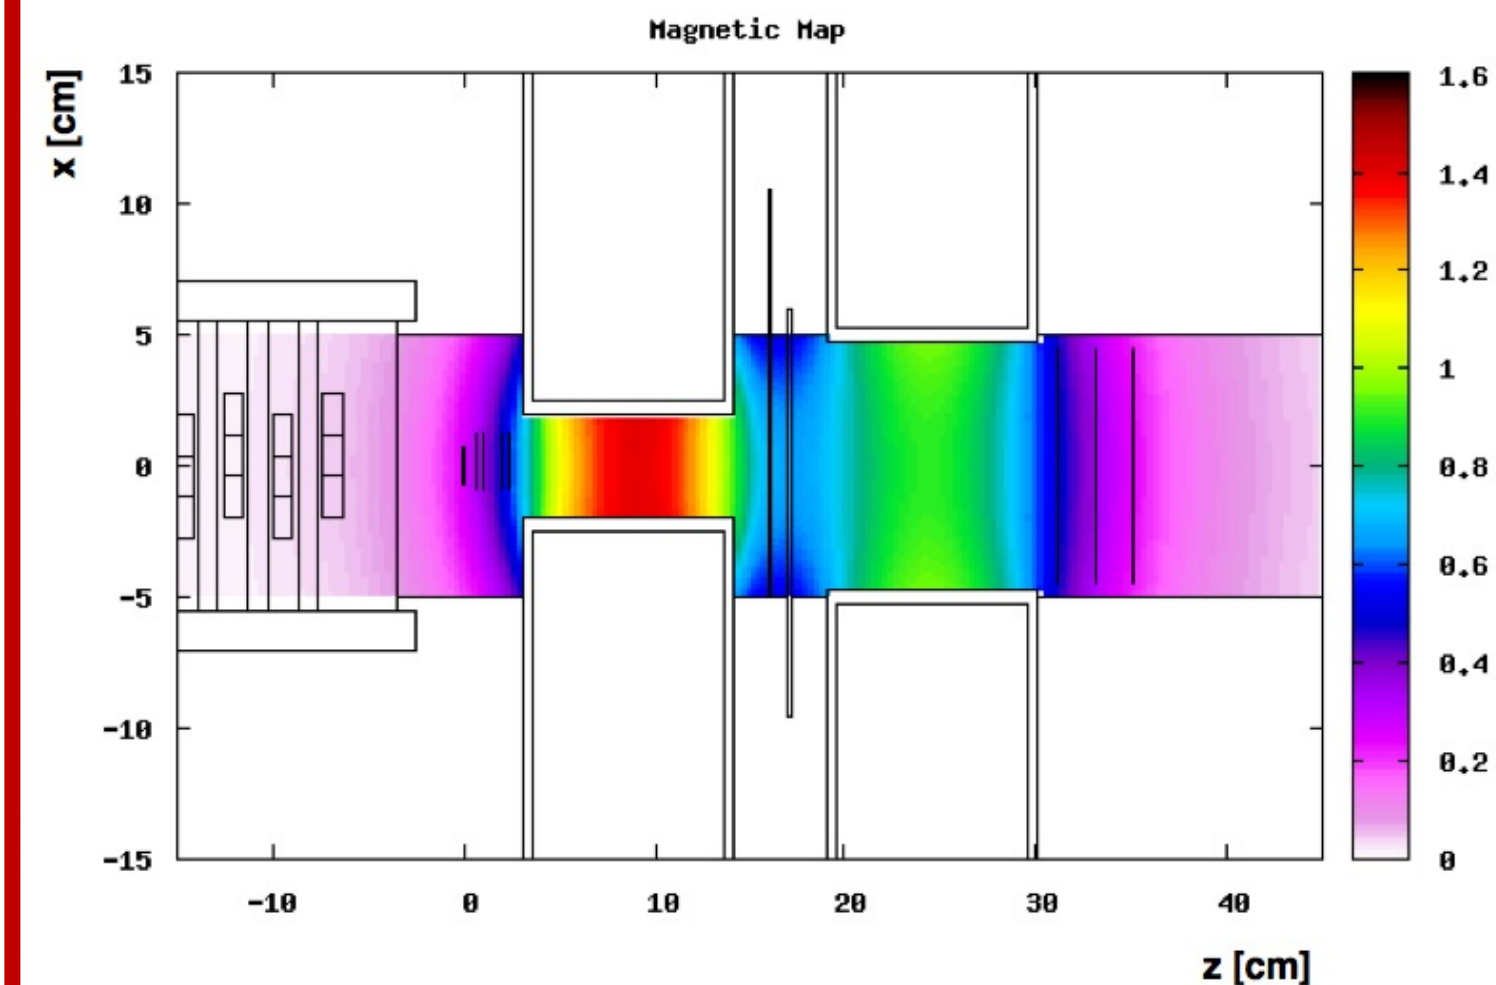

FOOT detector

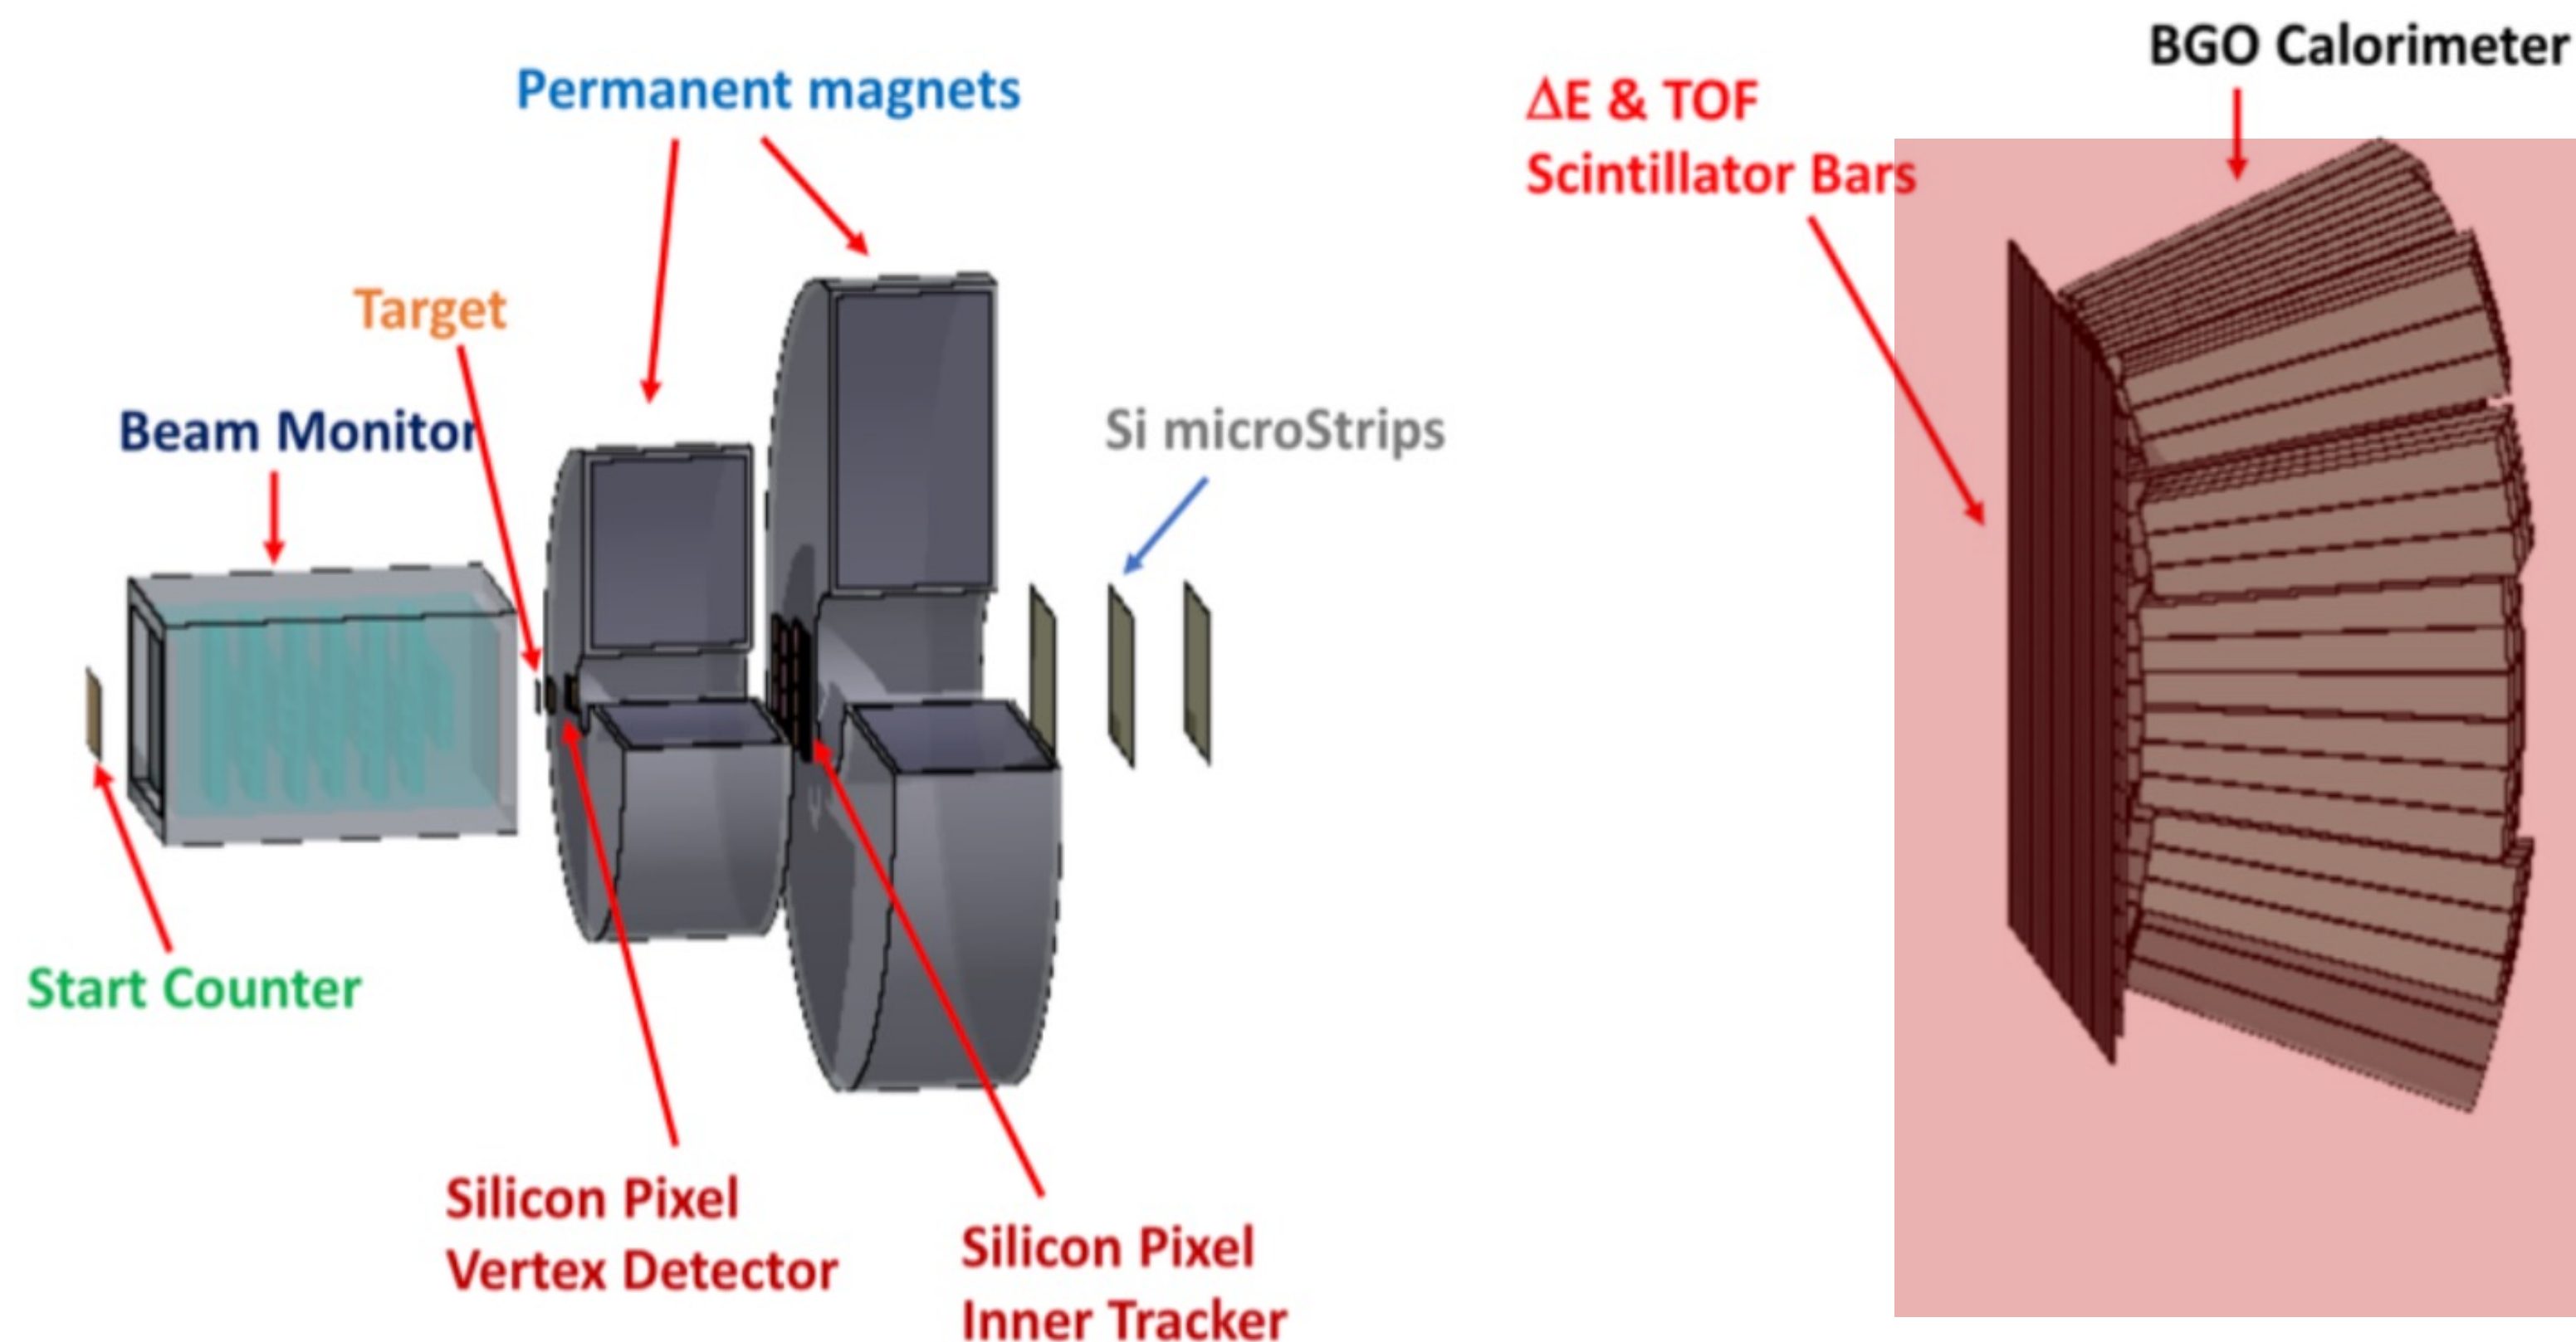

- Two layers xy of plastic scintillator bars for Z identification through dE/dx and TOF
- BGO calorimeter for the E_{kin} measurement


**Mass and charge
identification region**

The FOOT detector is a movable set-up to fit the experimental rooms dimensions of different PT treatment centers / experimental facility (CNAO, HIT, GSI) with ions beams.




Limited acquisition time and available space ("table top experiment")

FOOT ... “a table top experiment”, “a movable setup”

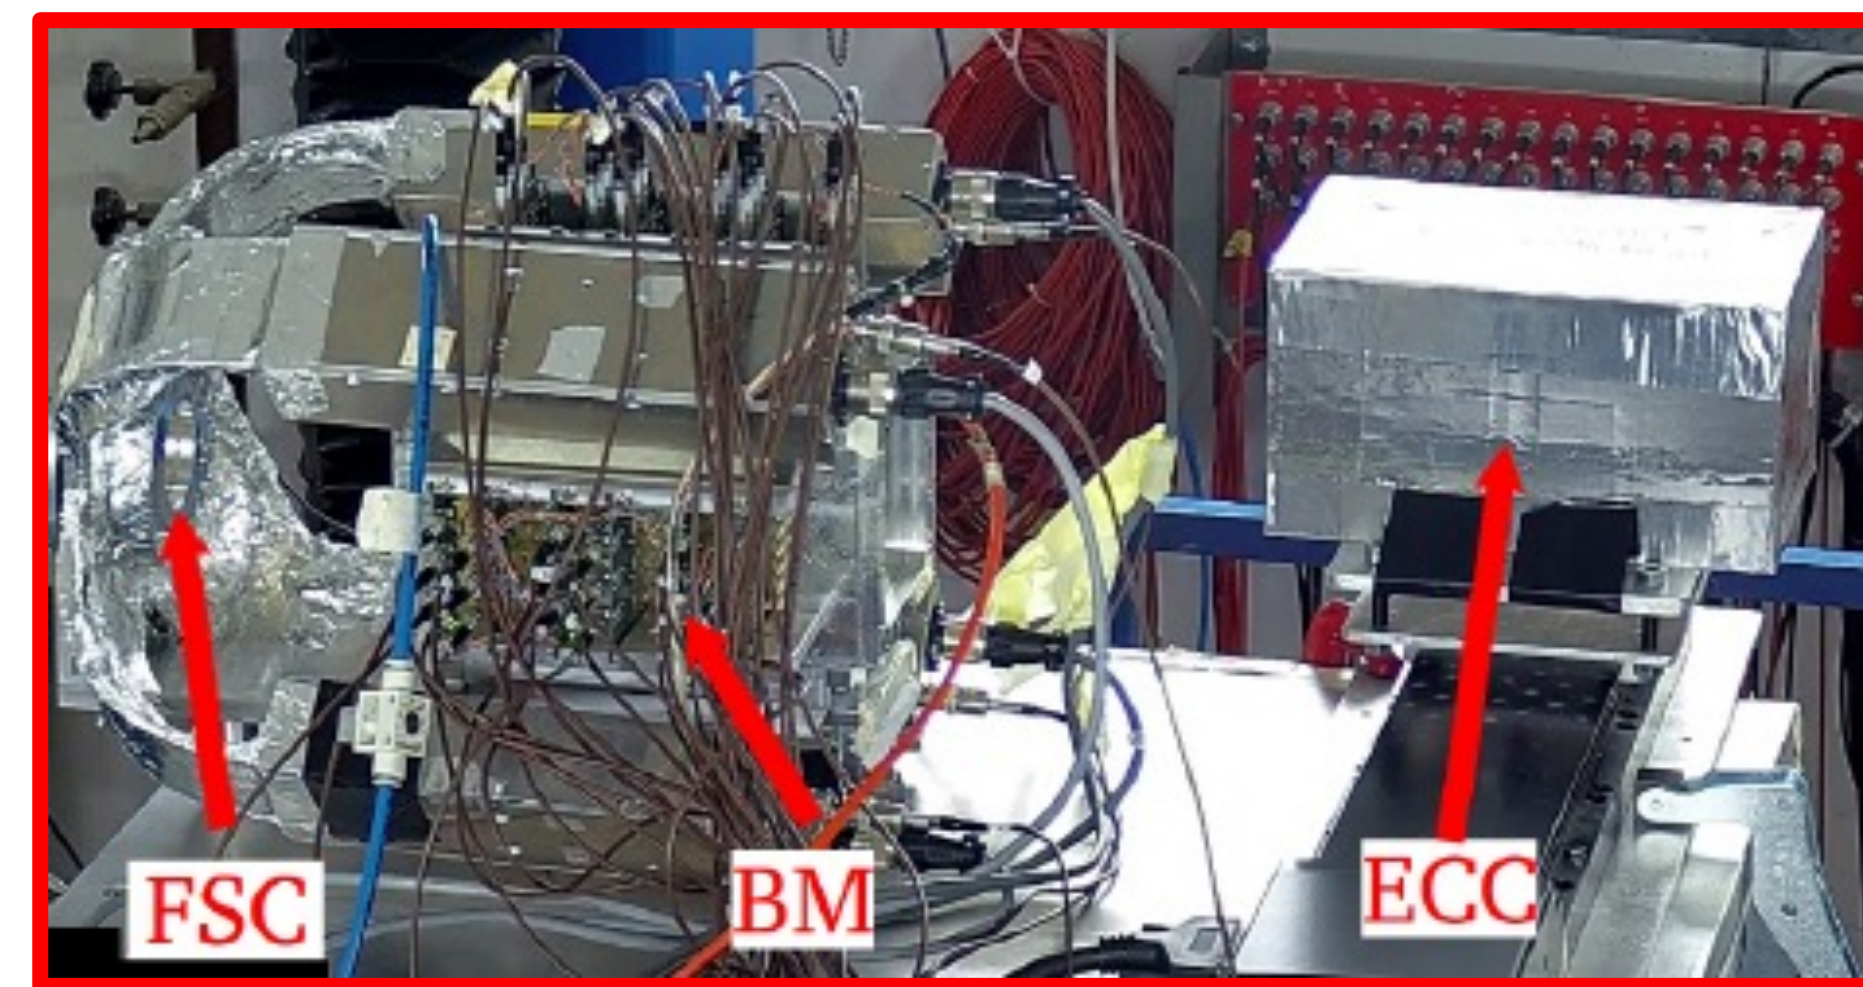


FOOT Emulsion set up at GSI

FOOT ... “a table top experiment”, “a movable setup”

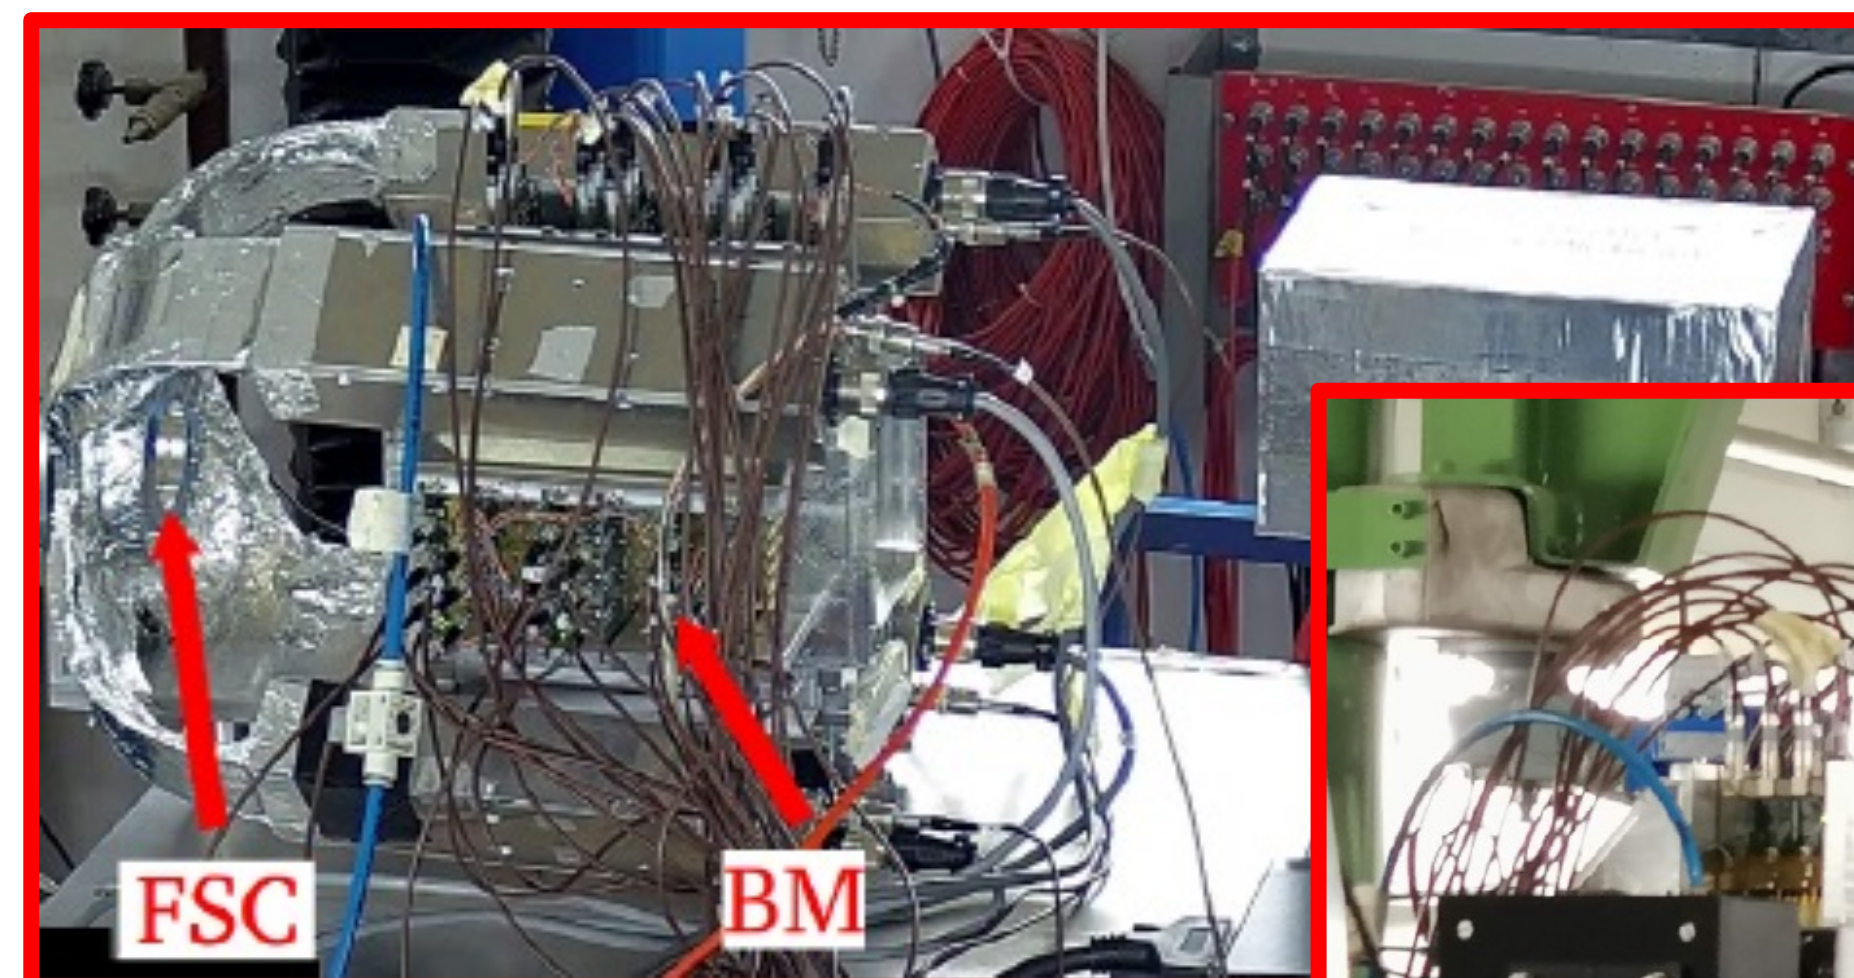


FOOT Emulsion set up at GSI

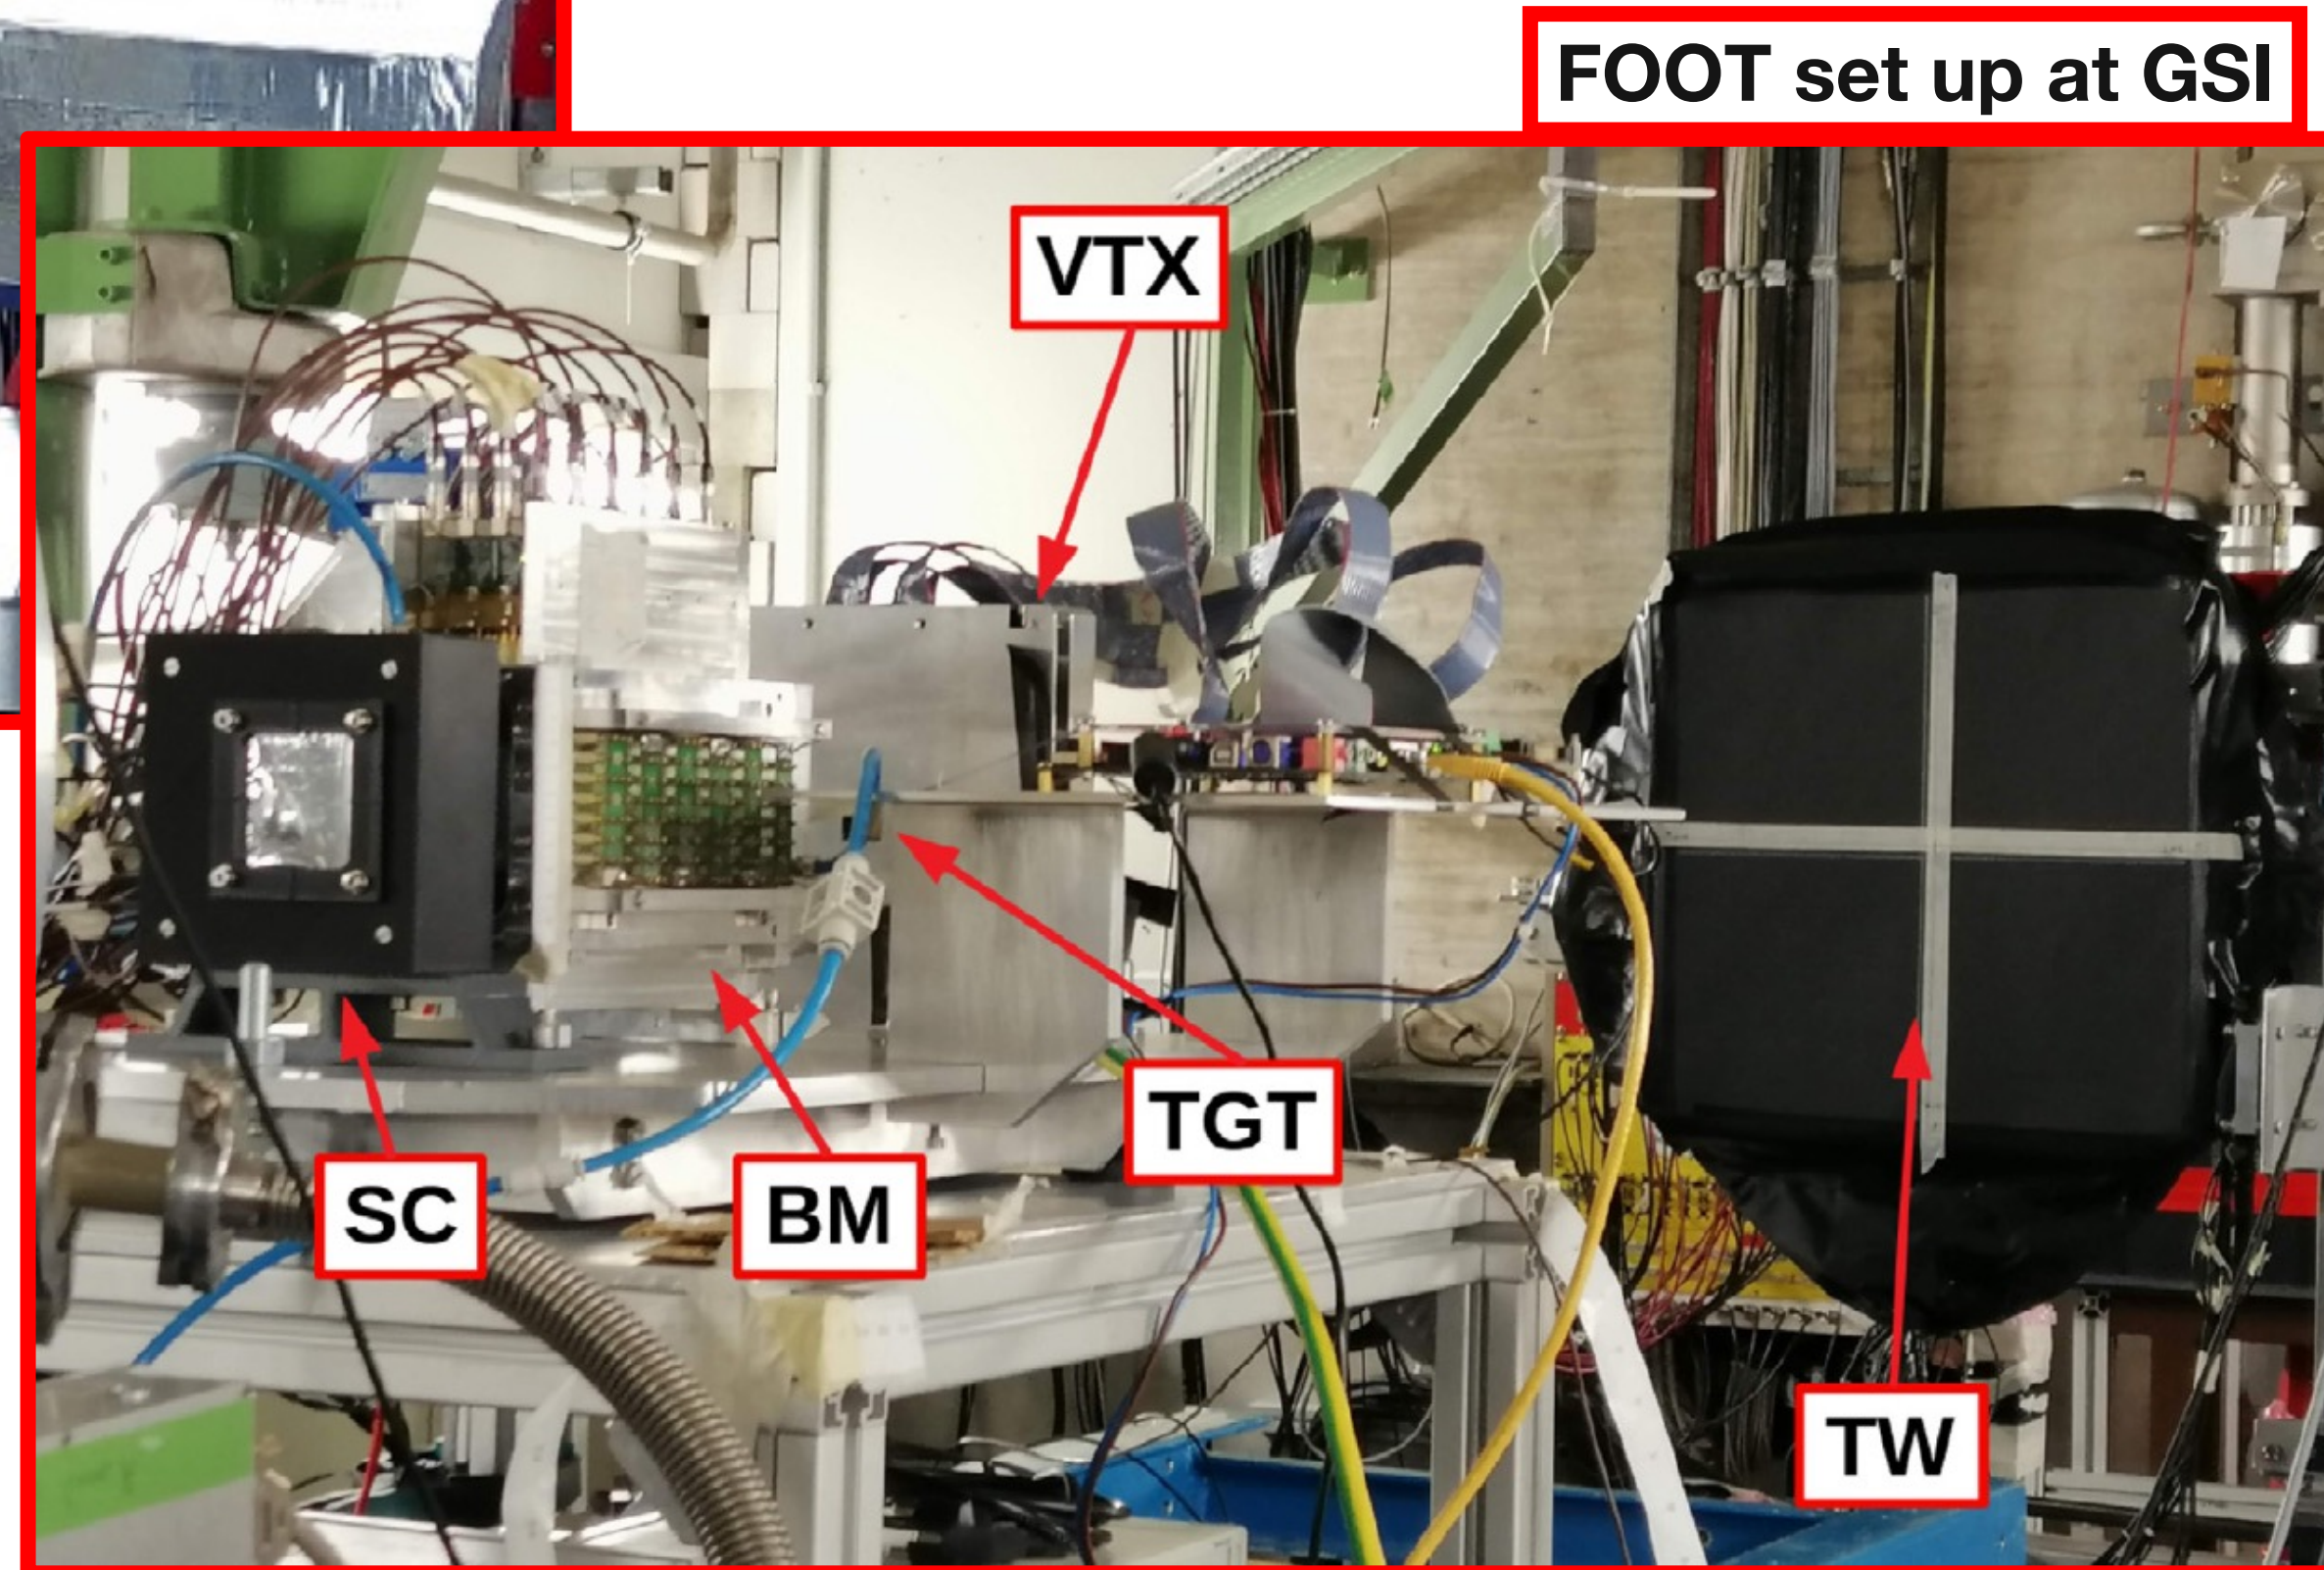


FOOT set up at GSI

FOOT ... “a table top experiment”, “a movable setup”

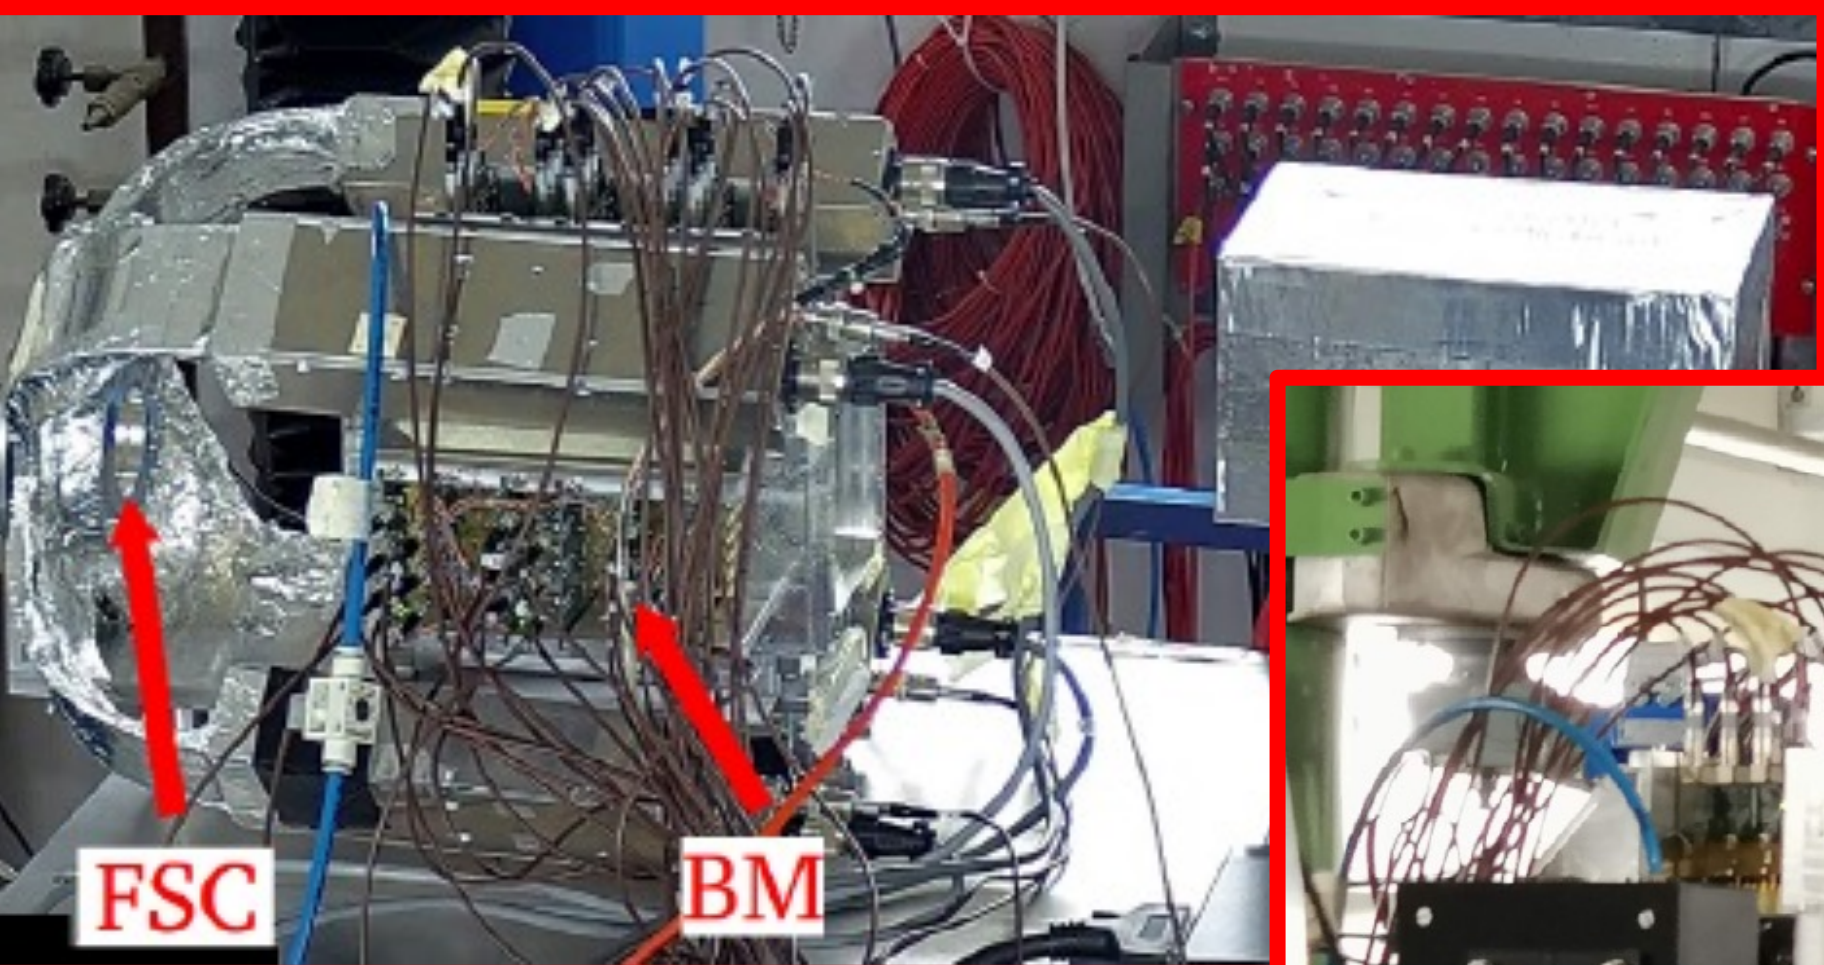


FOOT Emulsion set up at GSI


FOOT set up at GSI

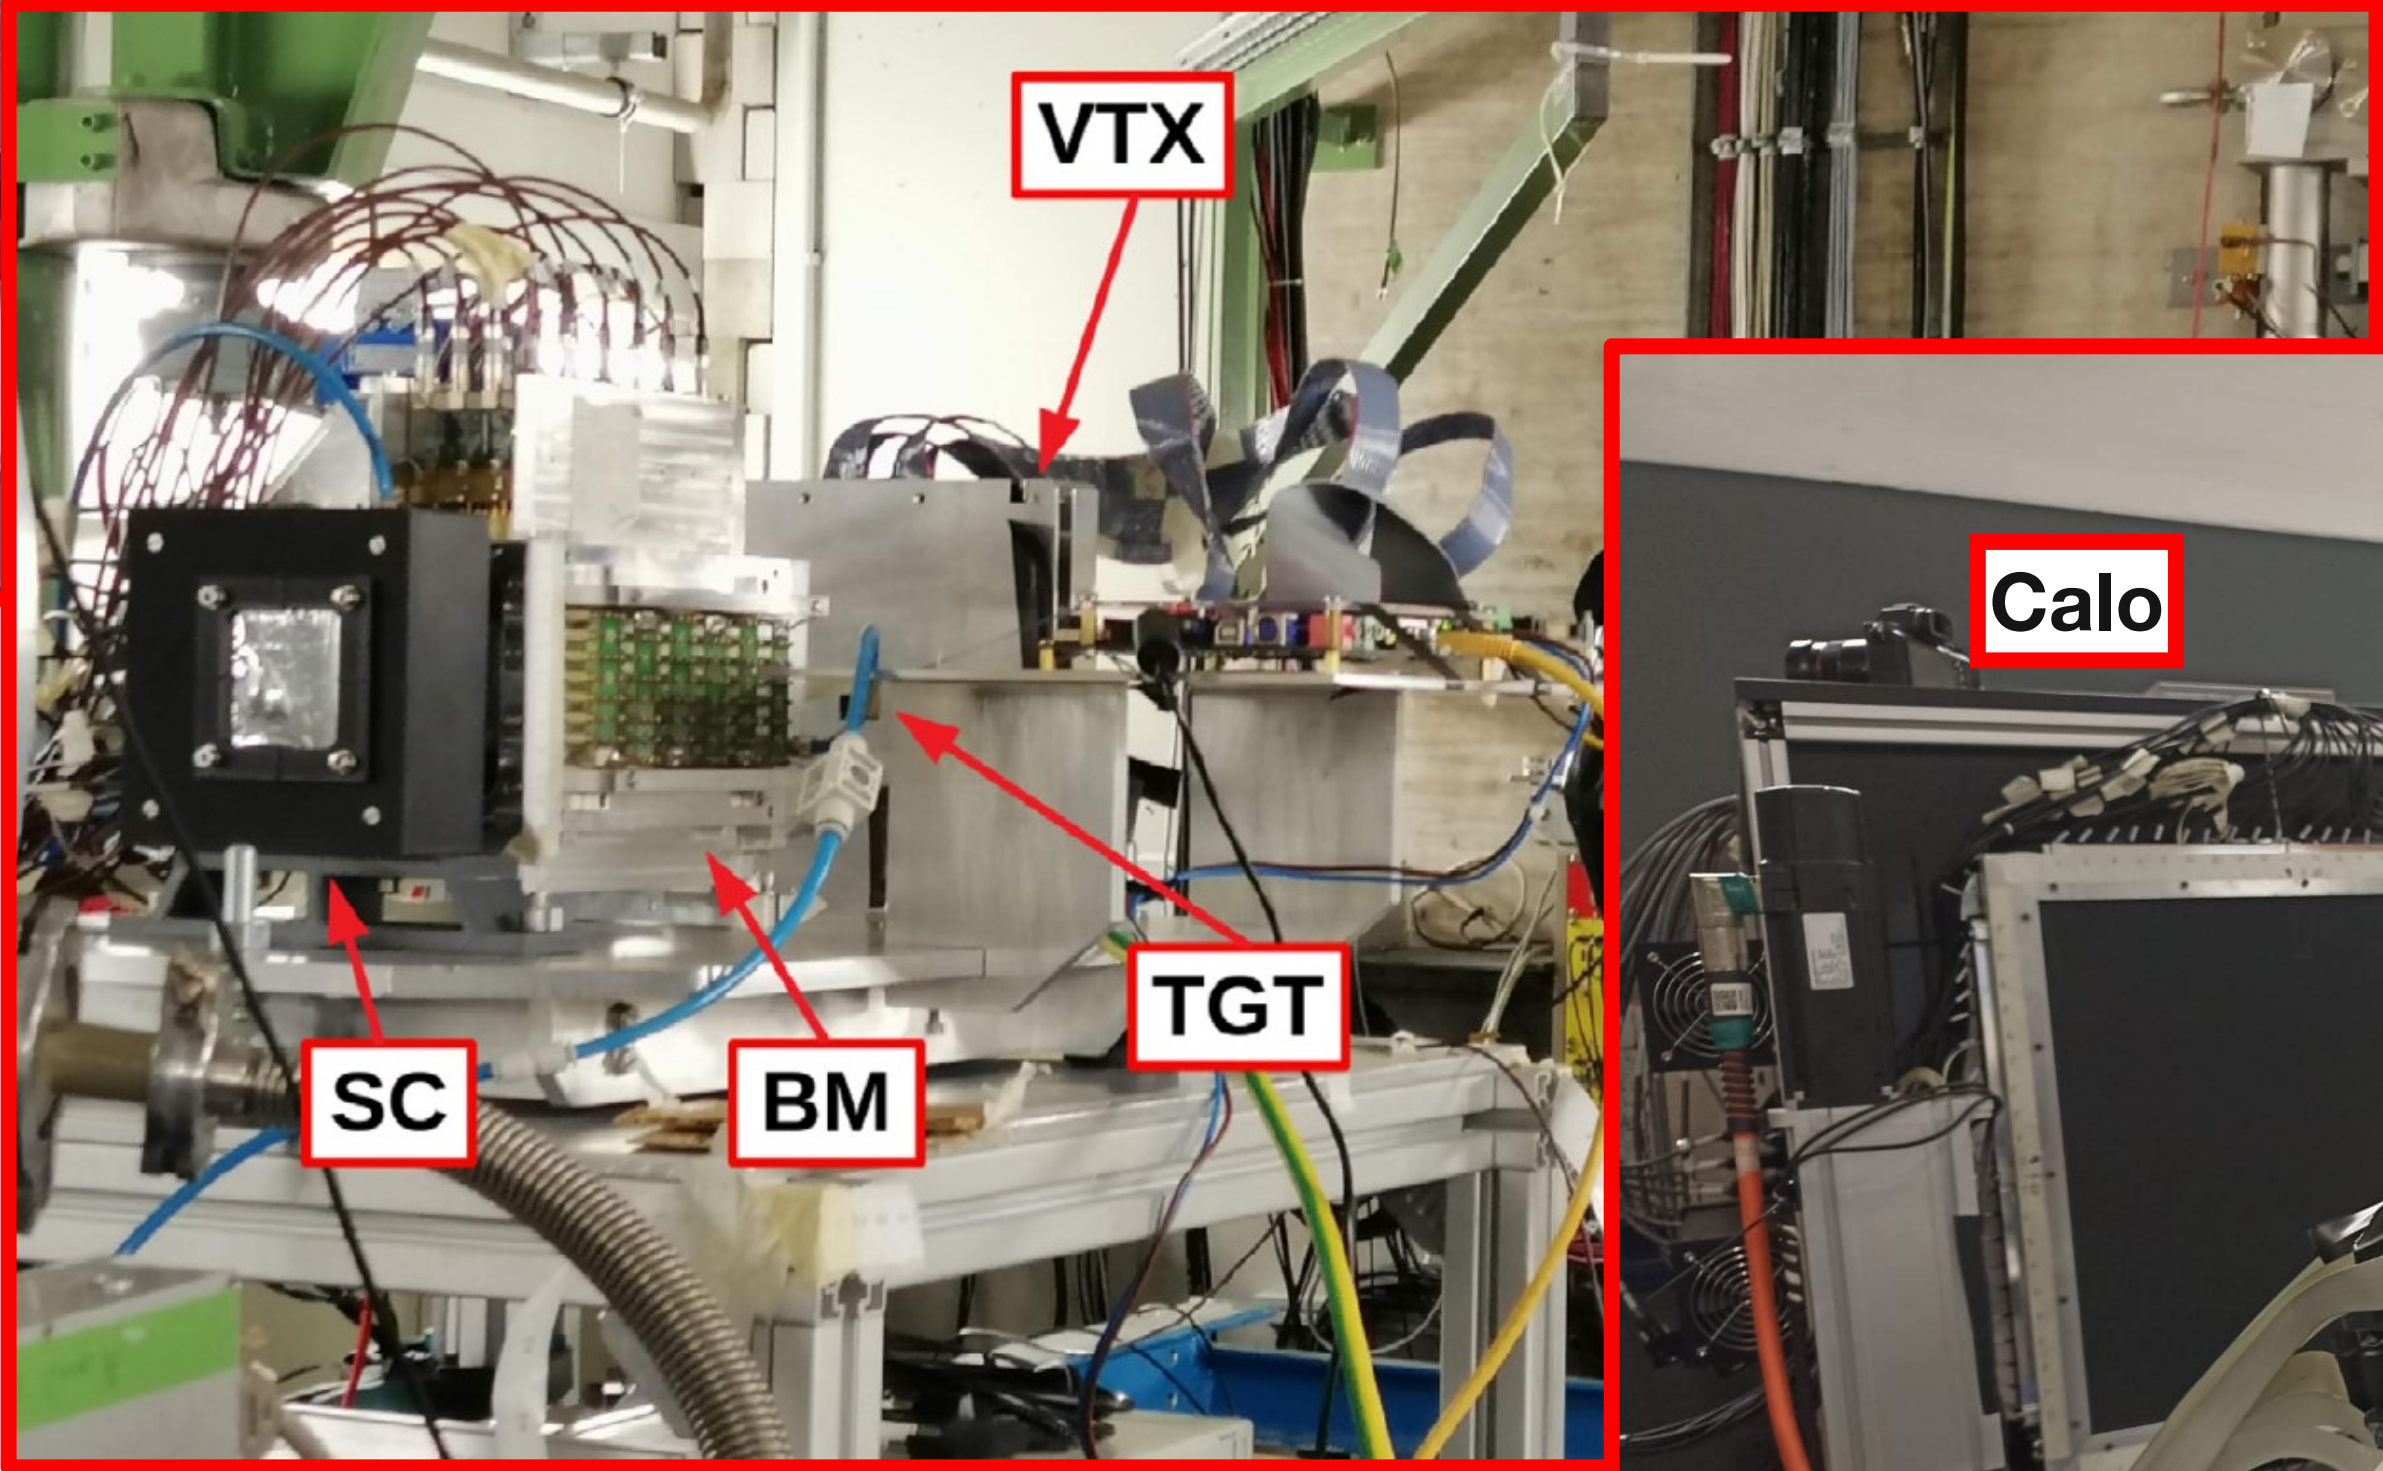

FOOT set up at HIT

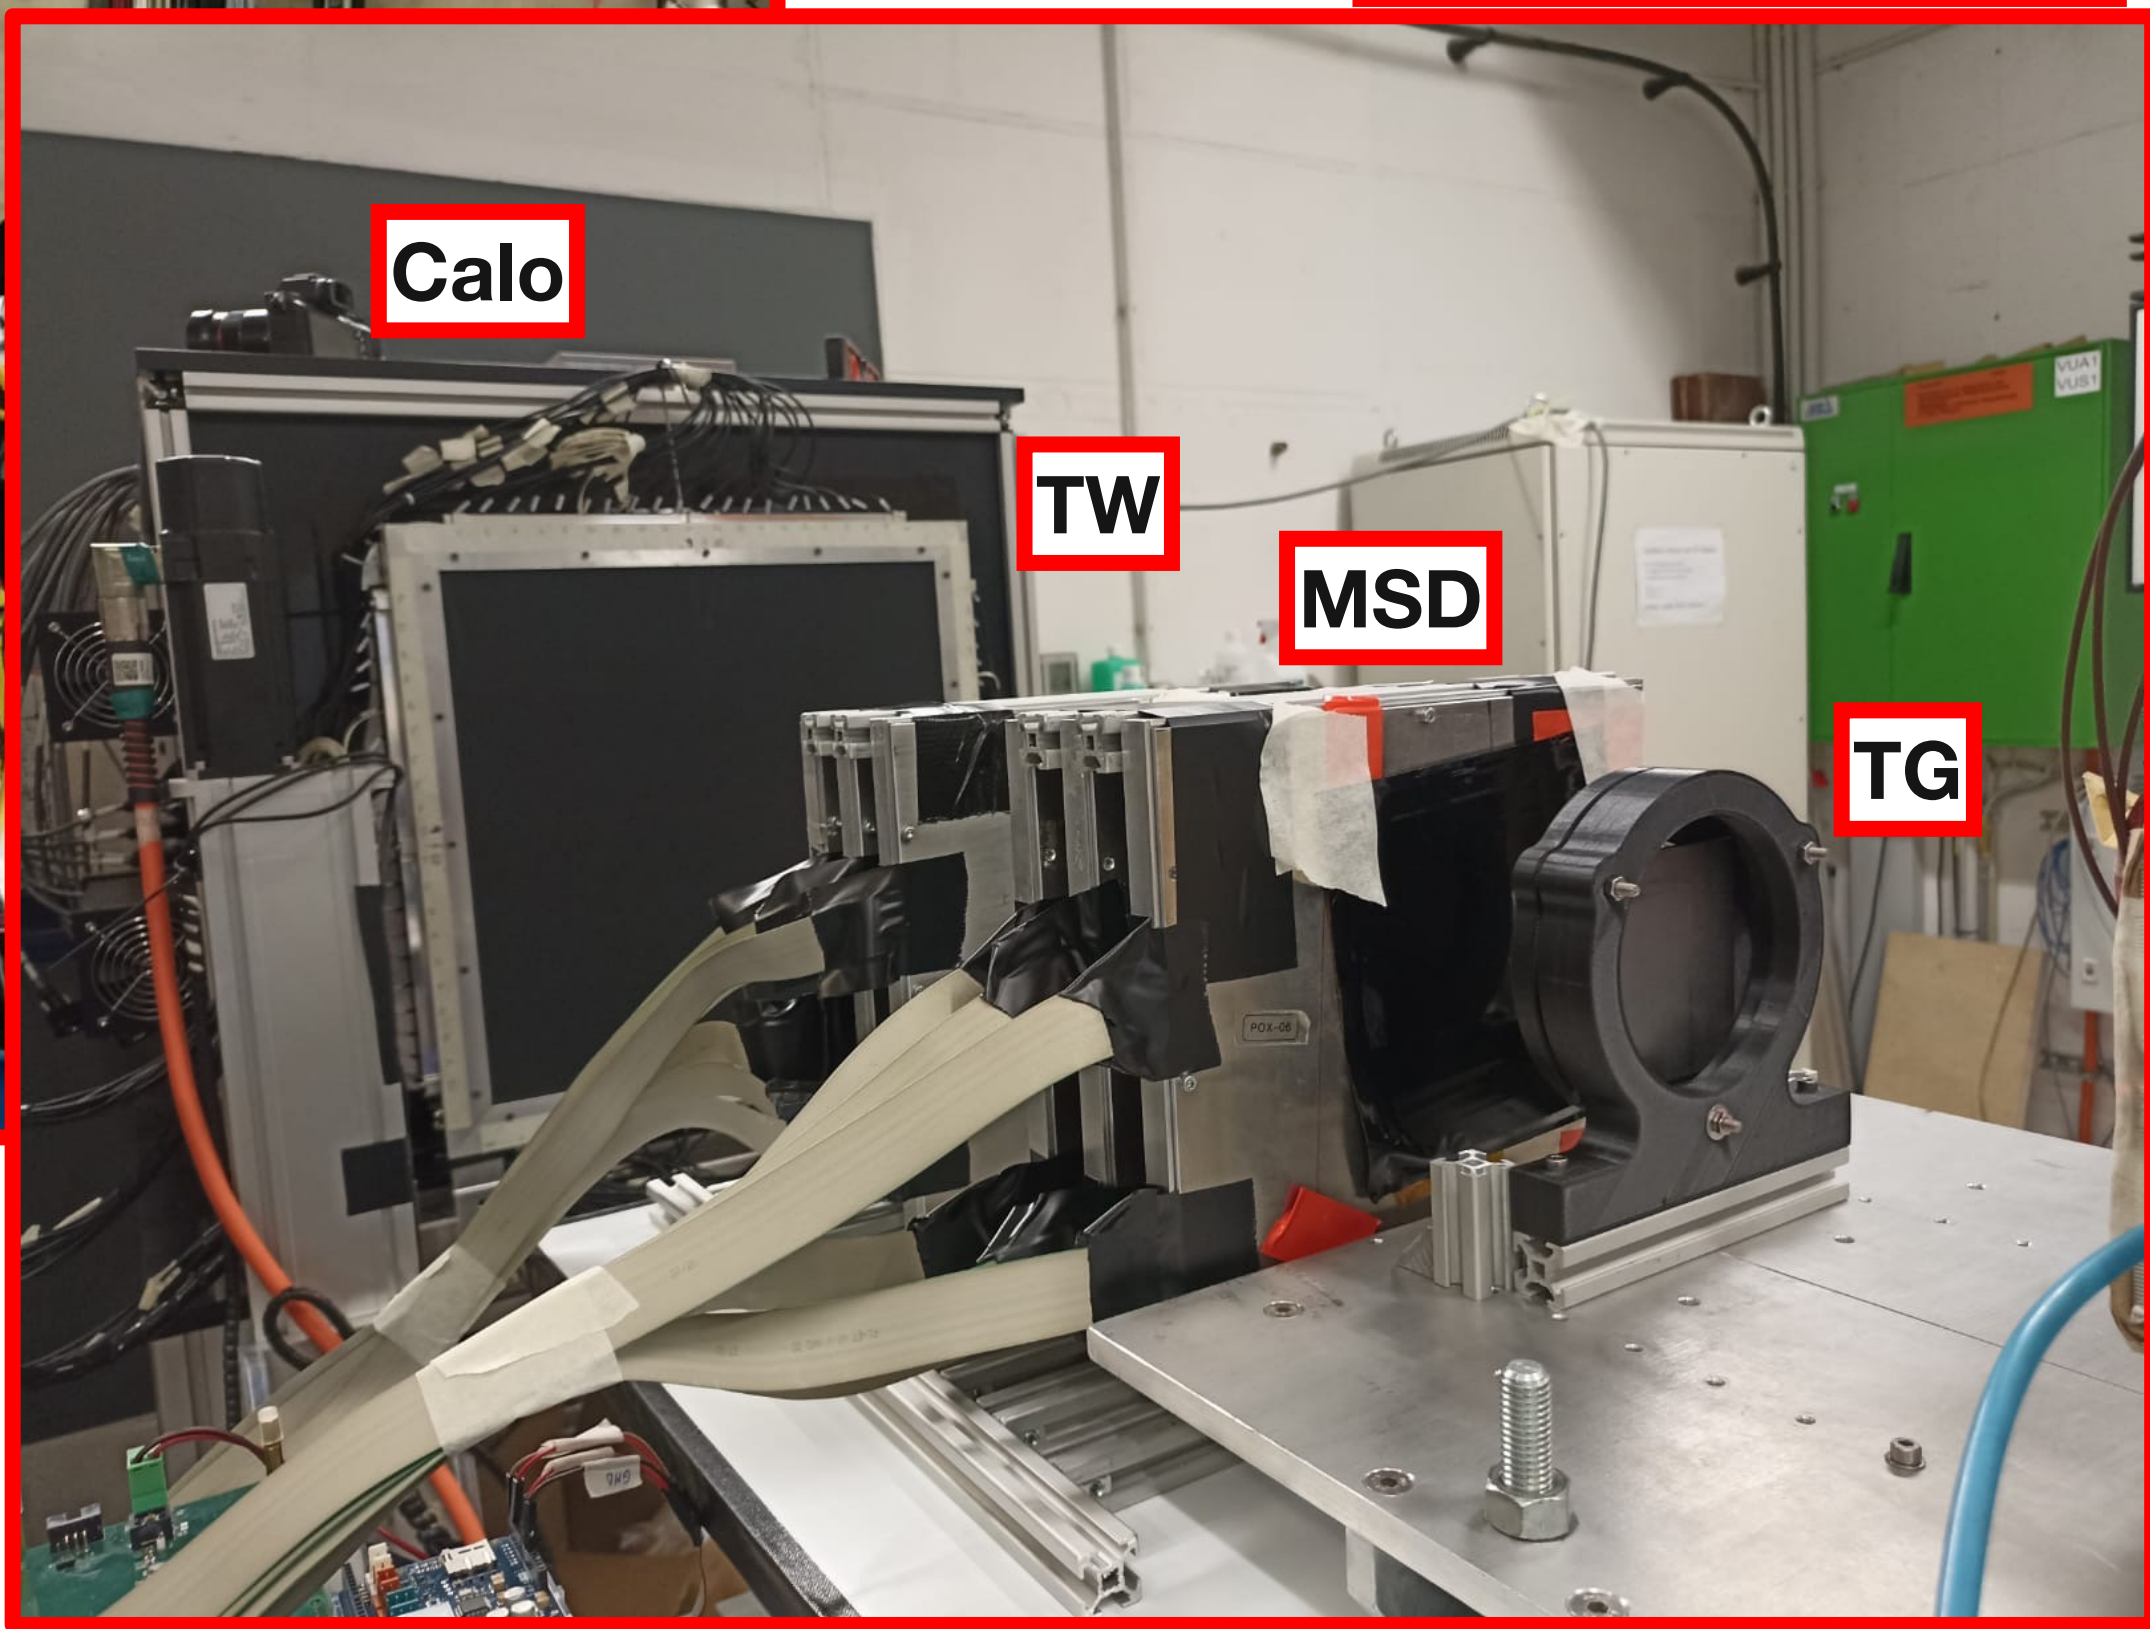




FOOT ... “a table top experiment”, “a movable setup”

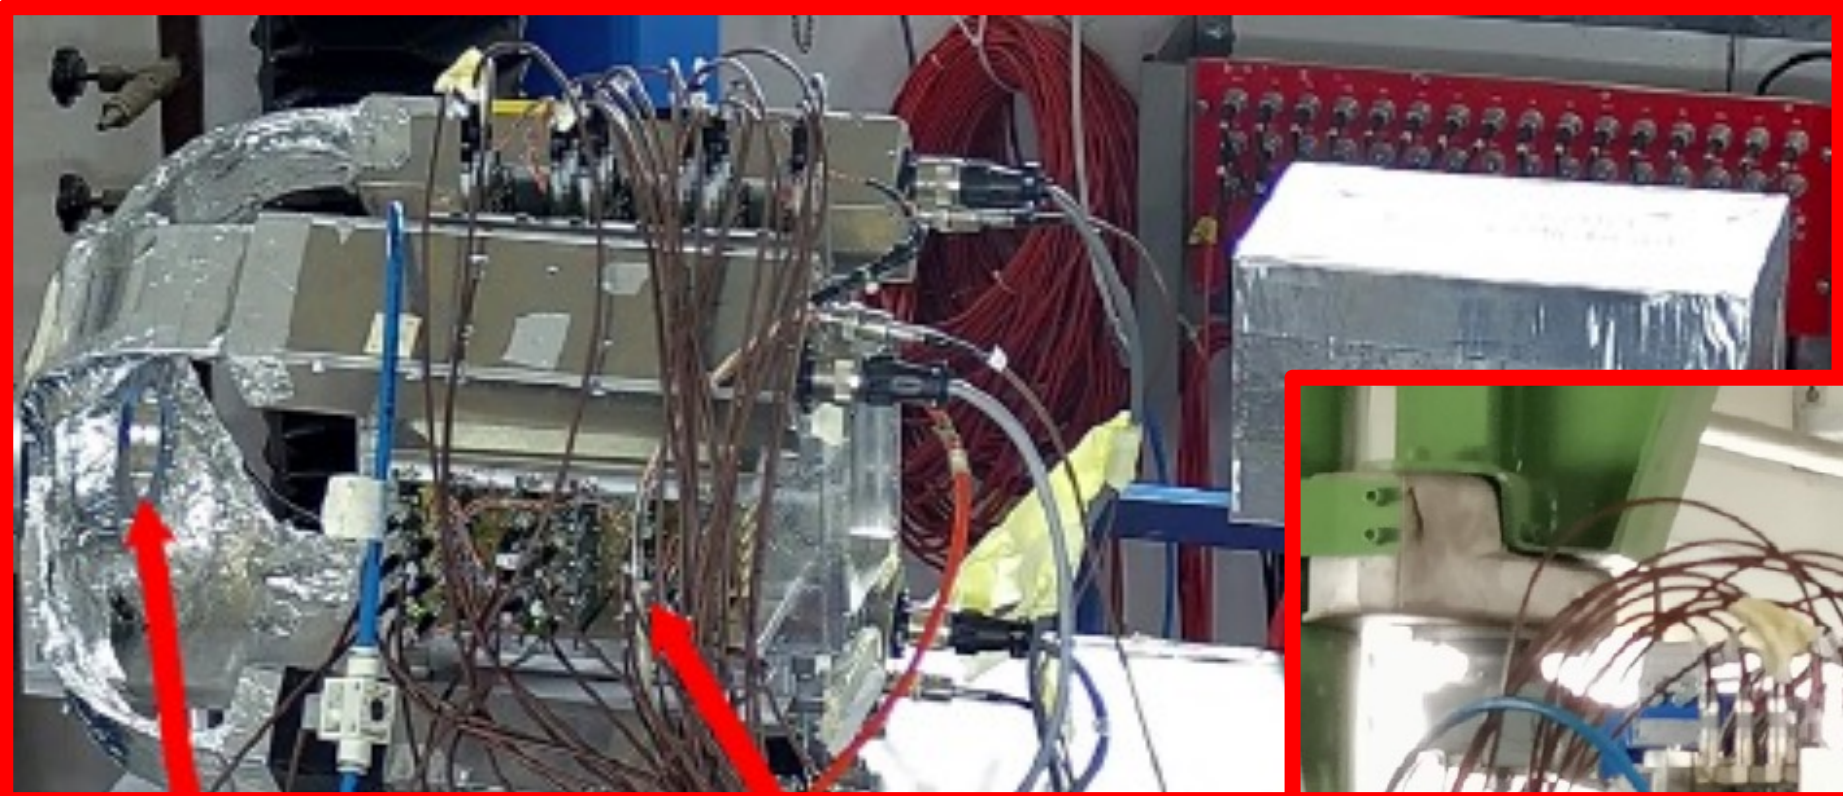


FOOT set up at GSI



FOOT set up at HIT

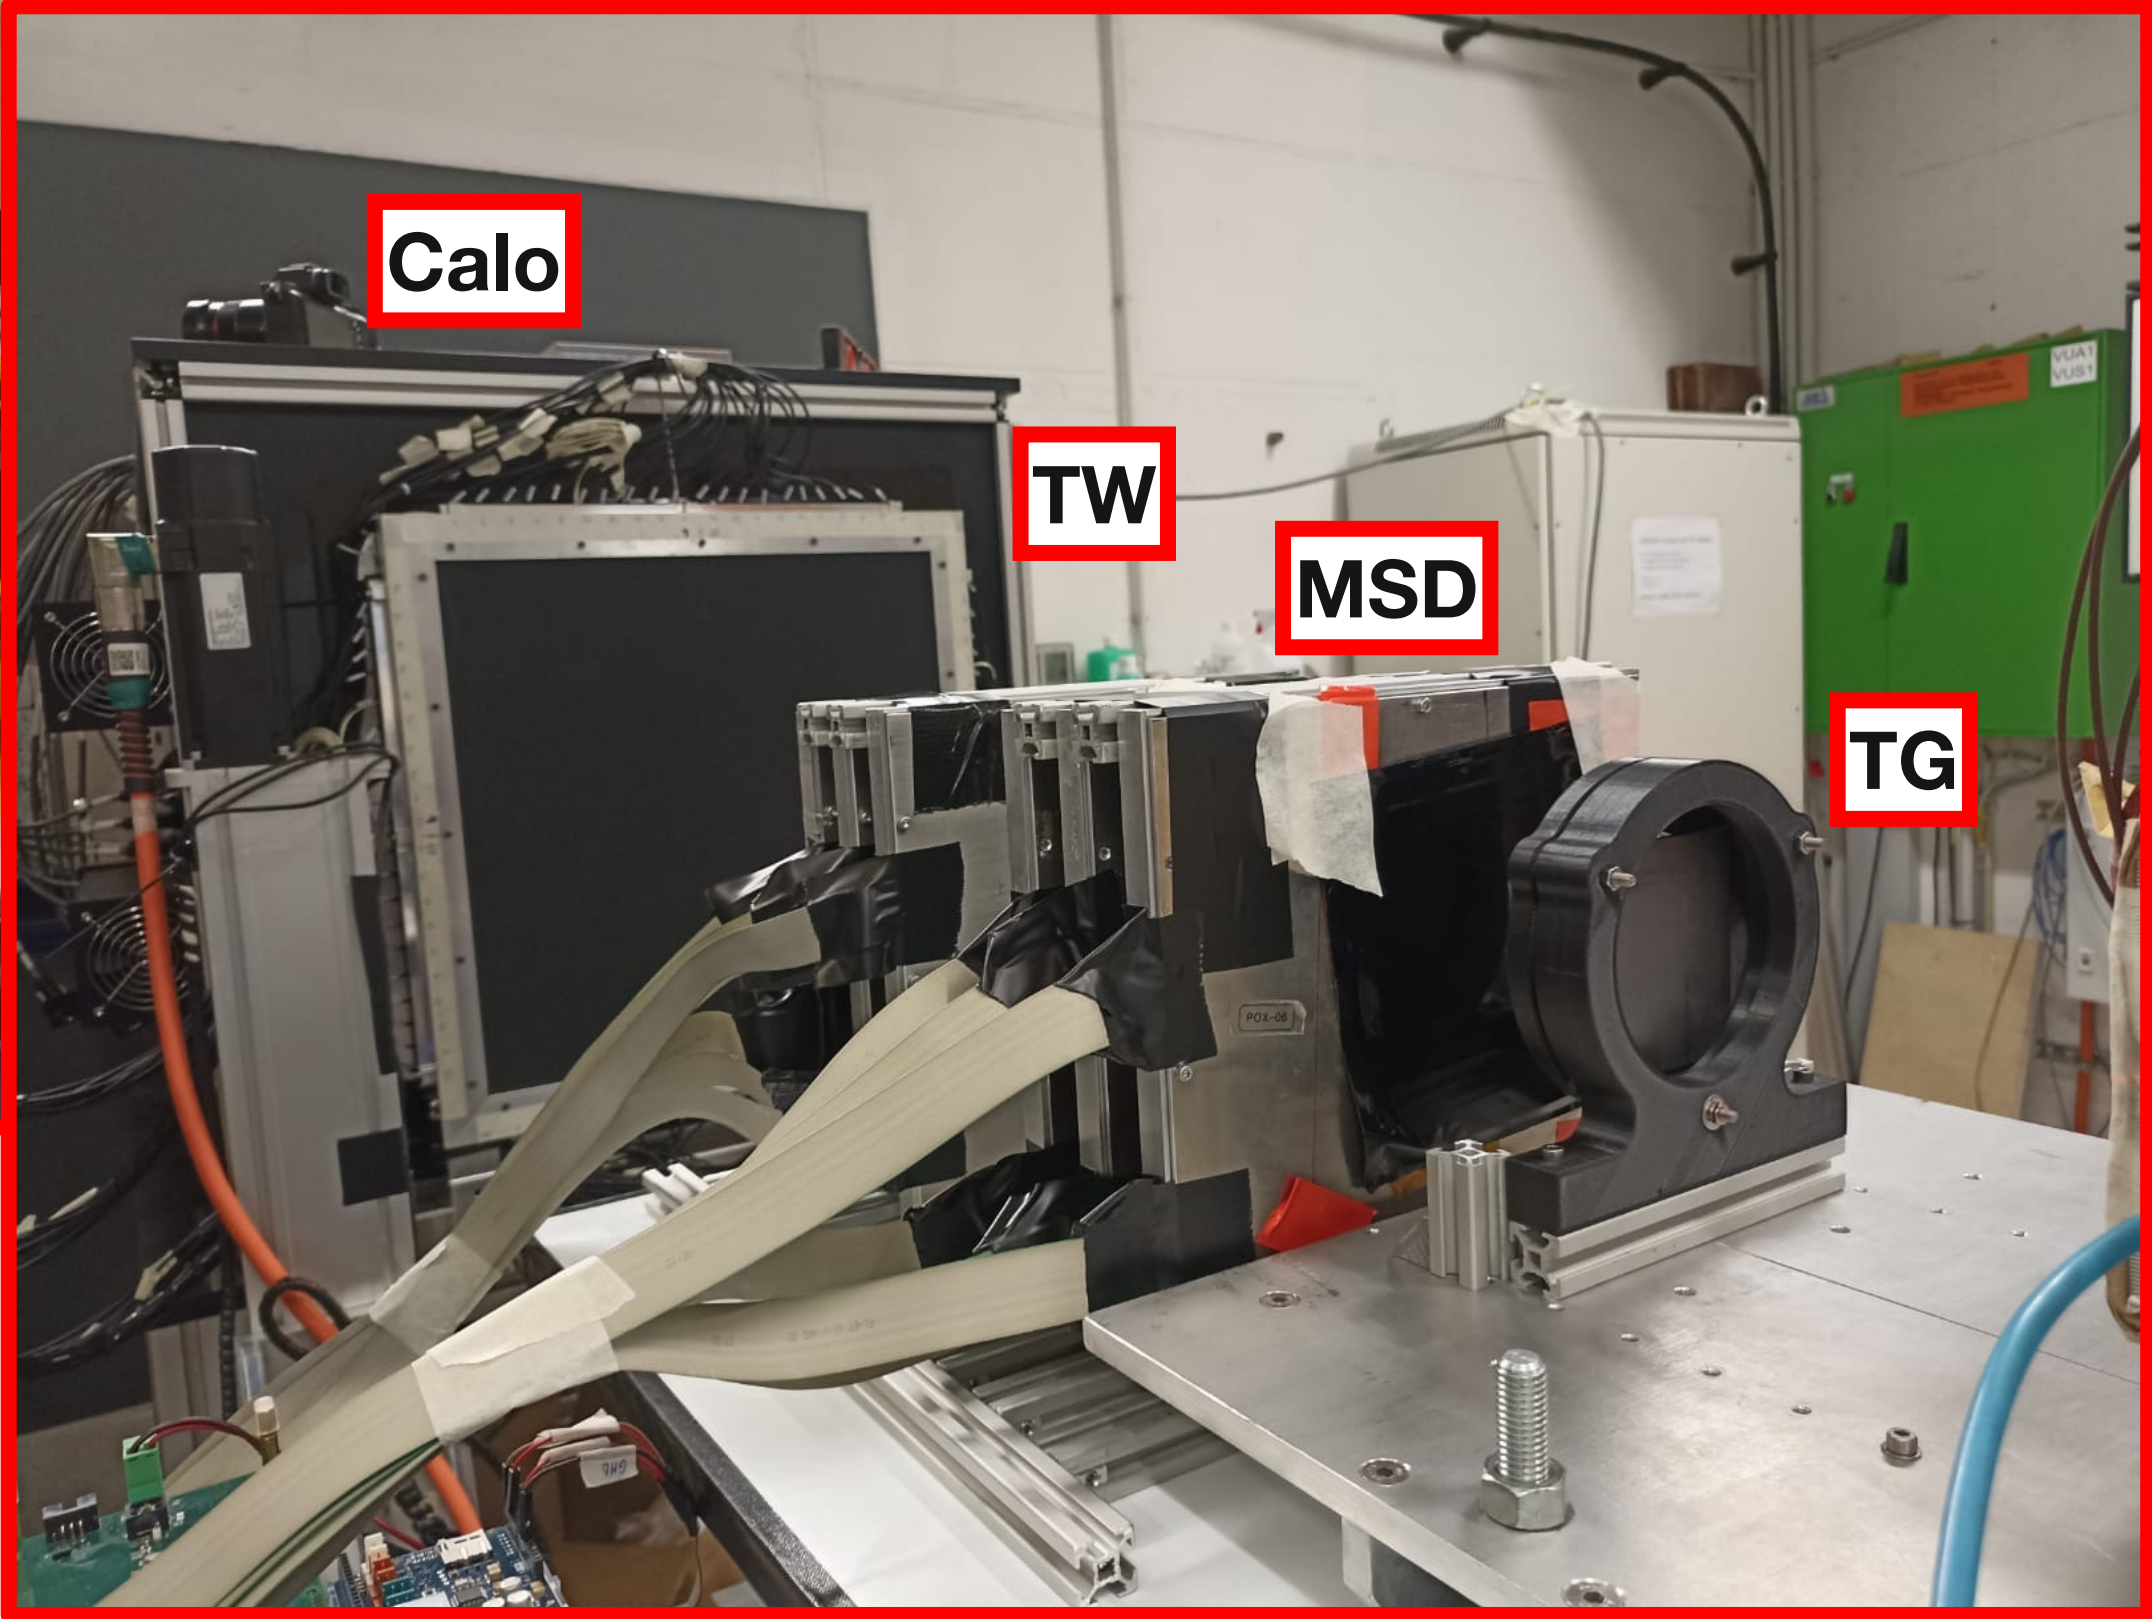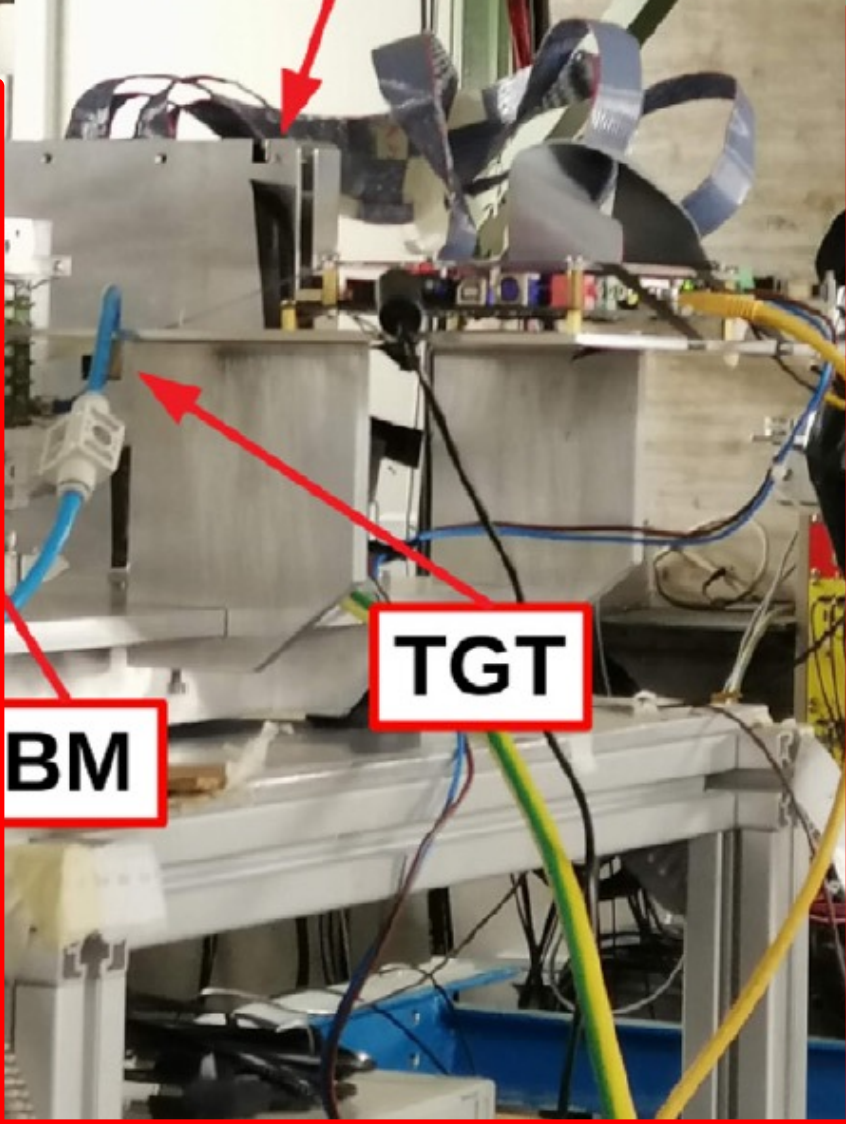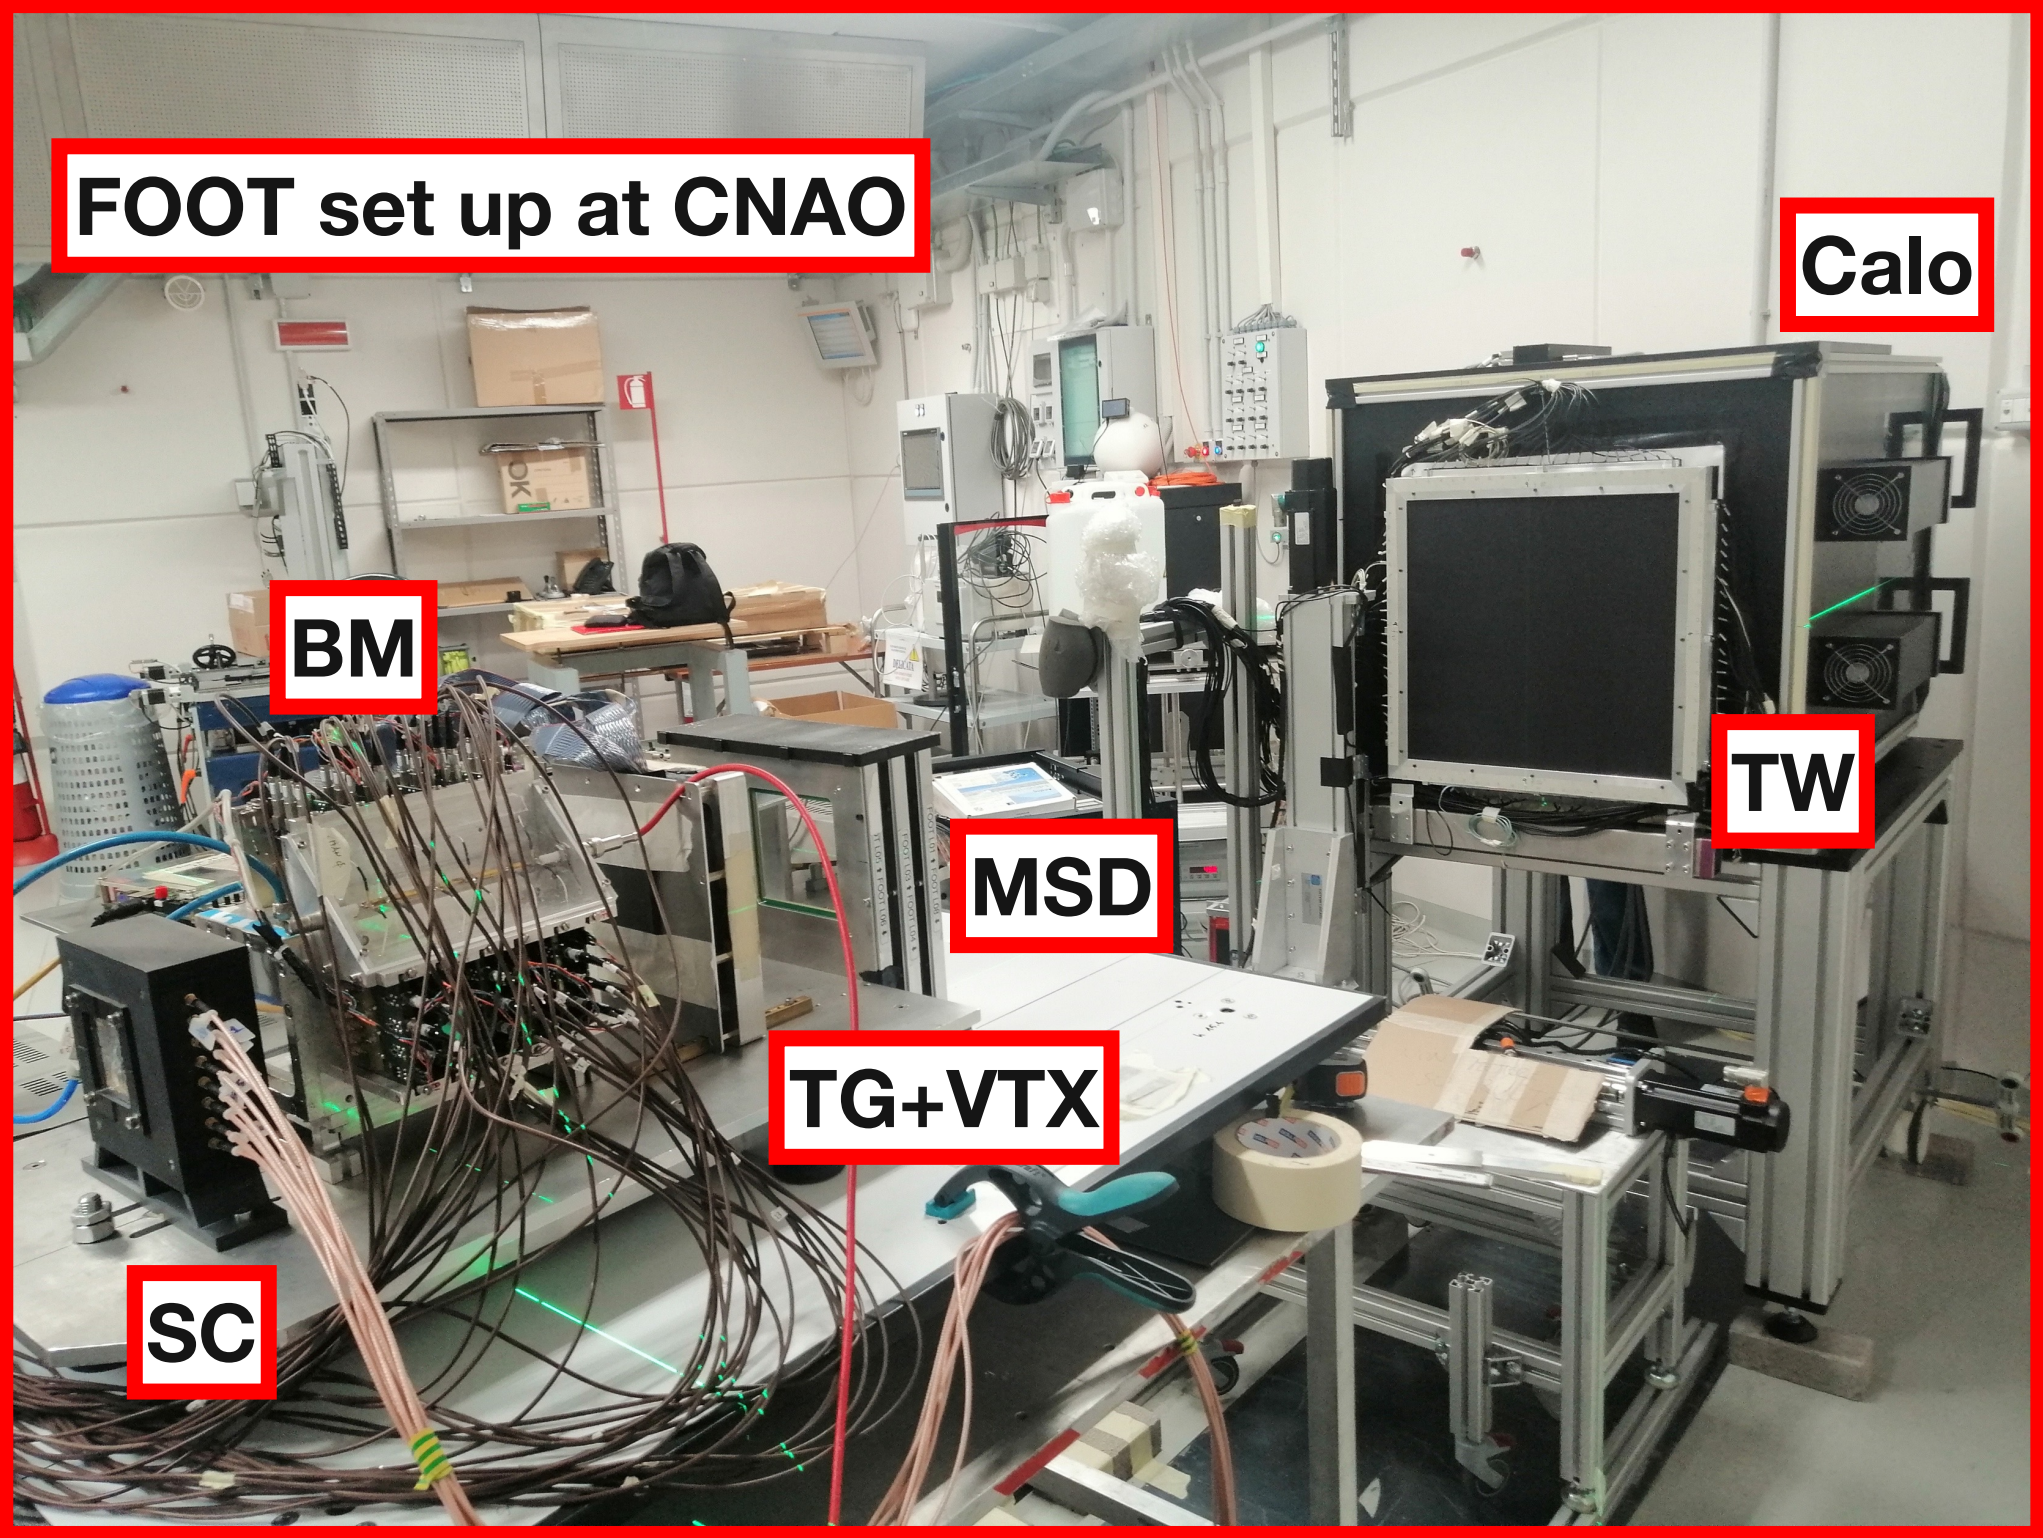




FOOT ... “a table top experiment”, “a movable setup”

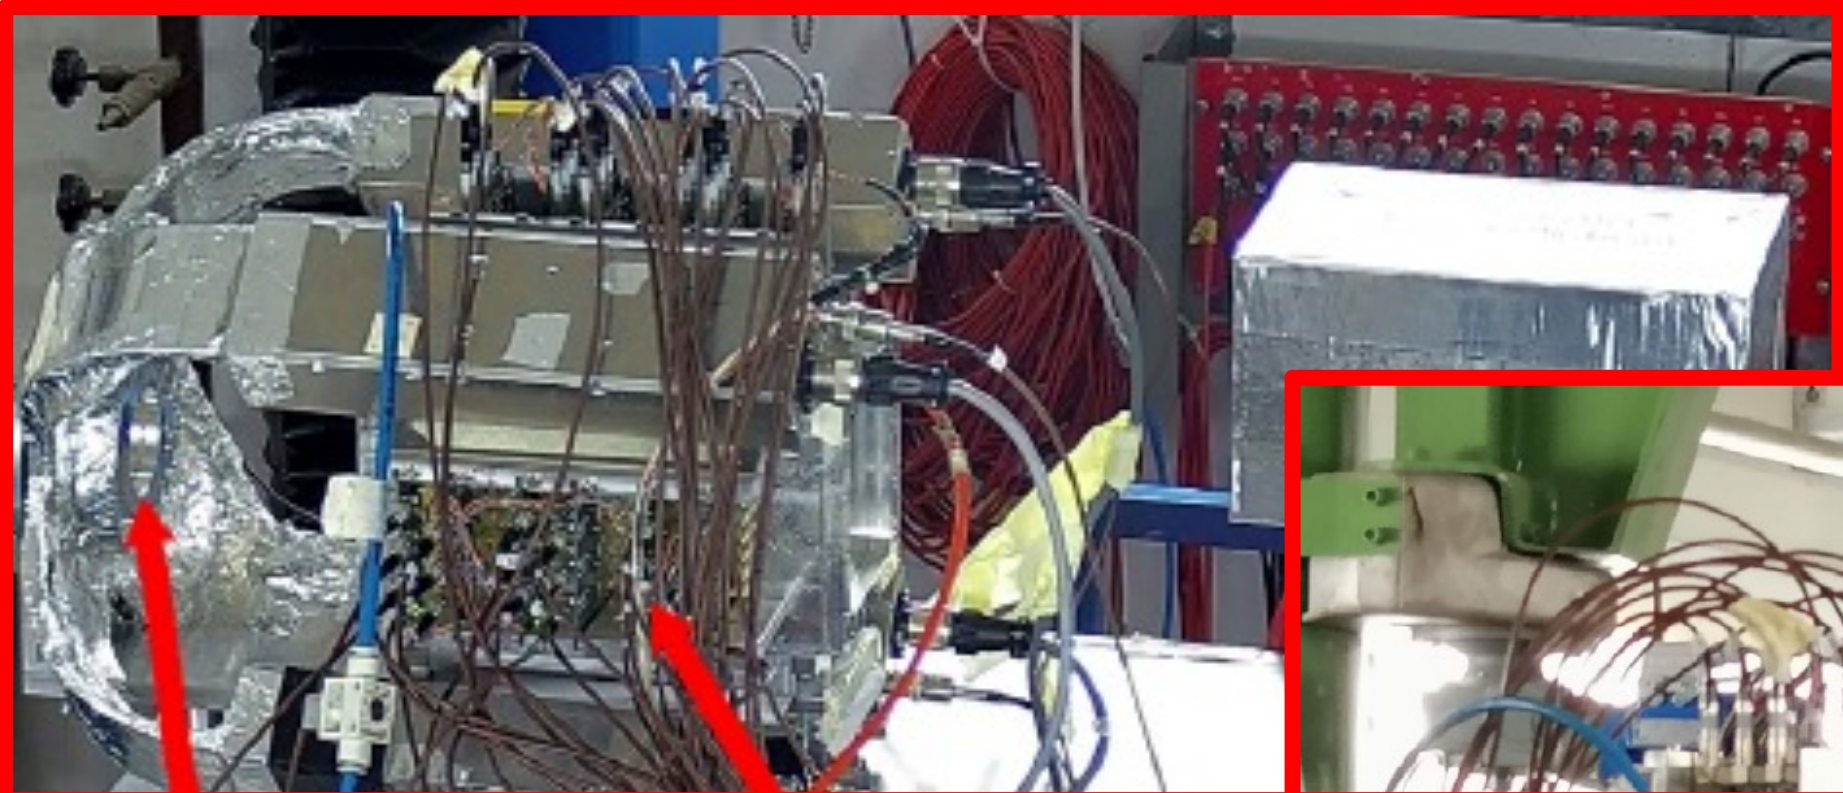




FOOT set up at GSI





FOOT set up at HIT

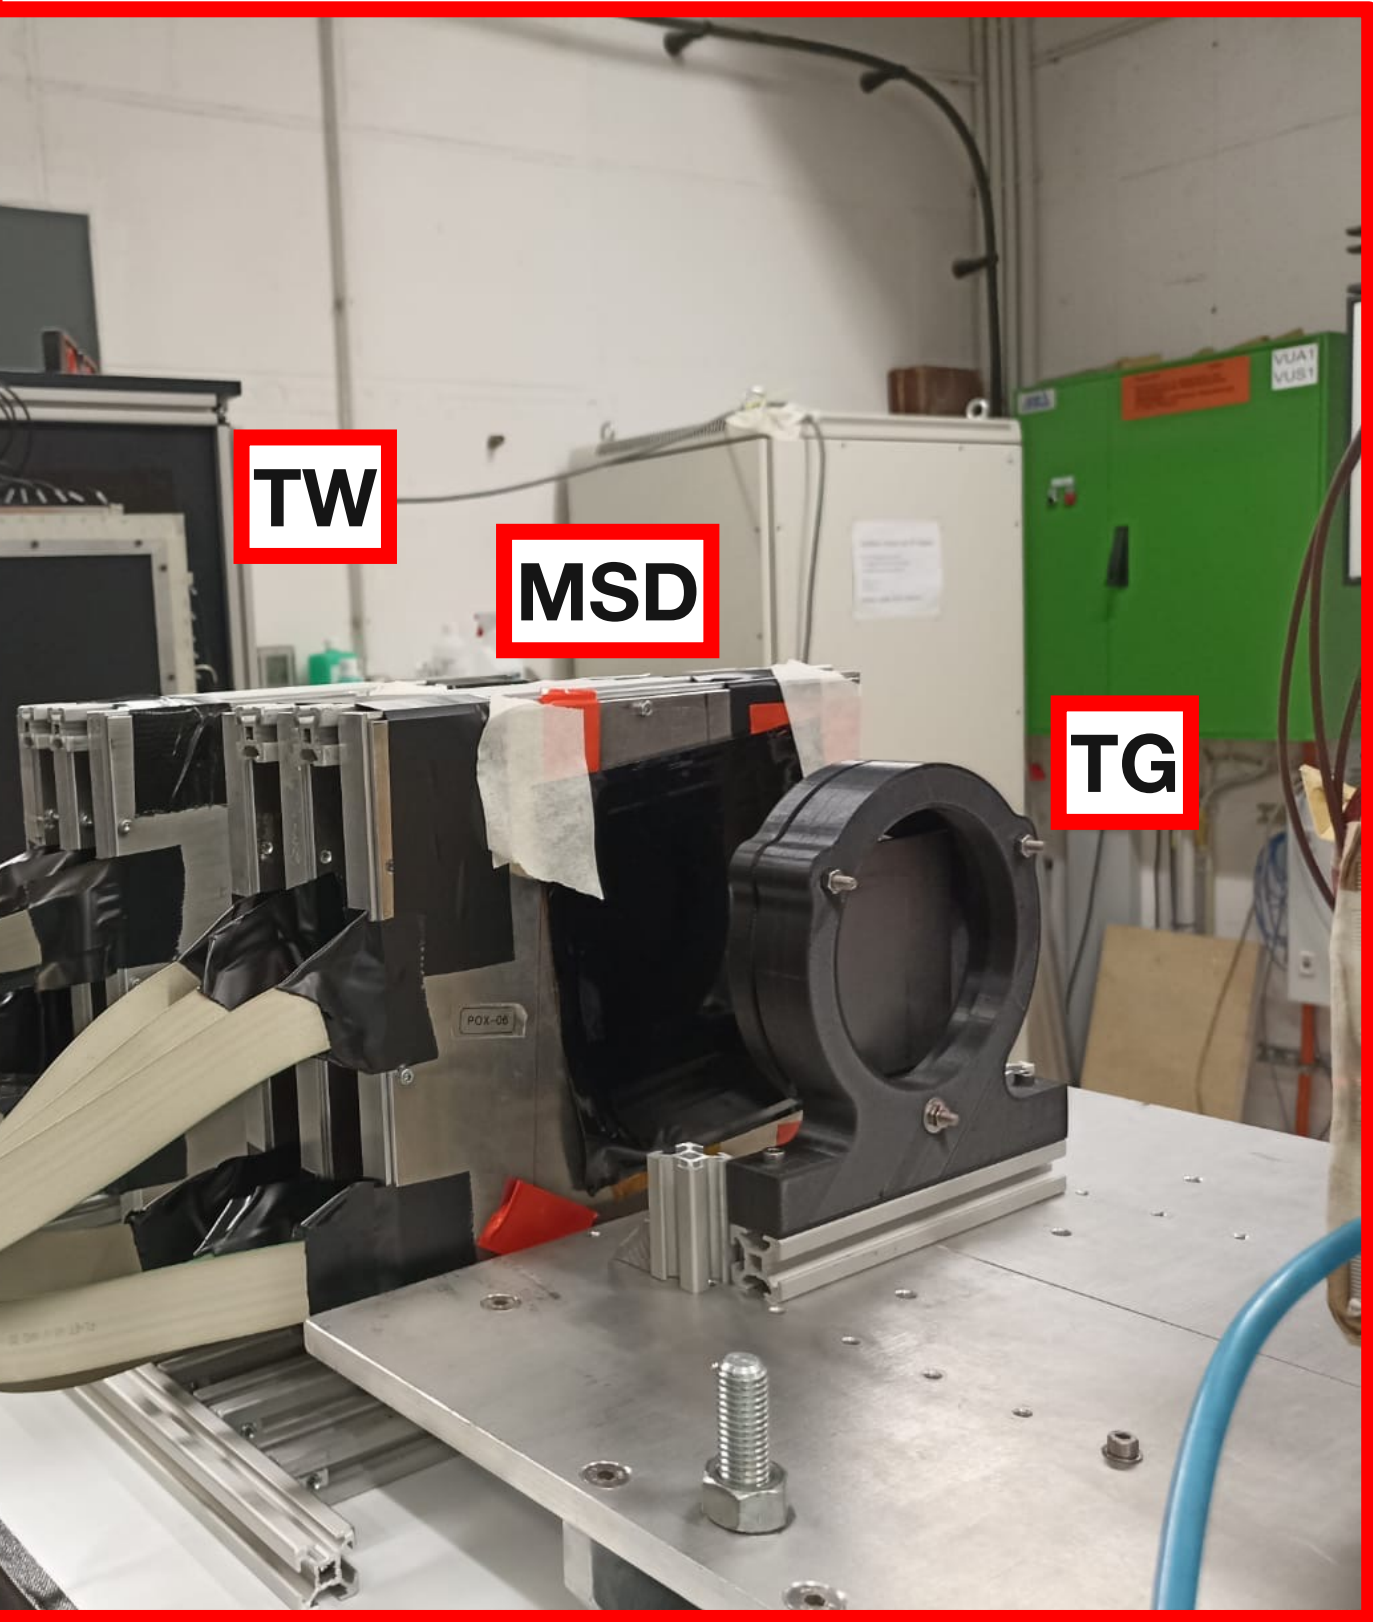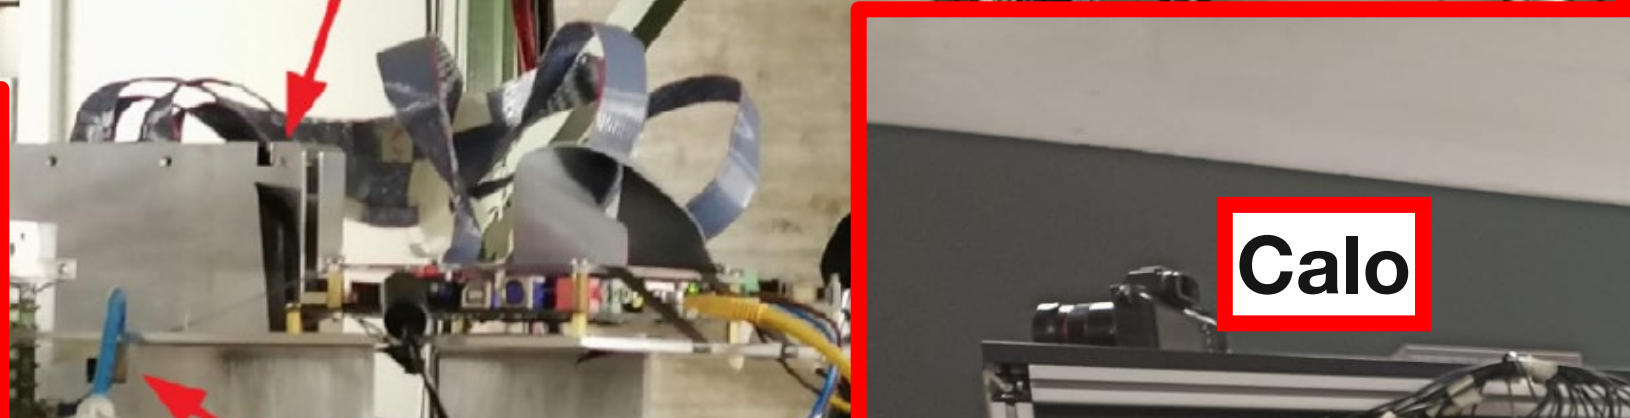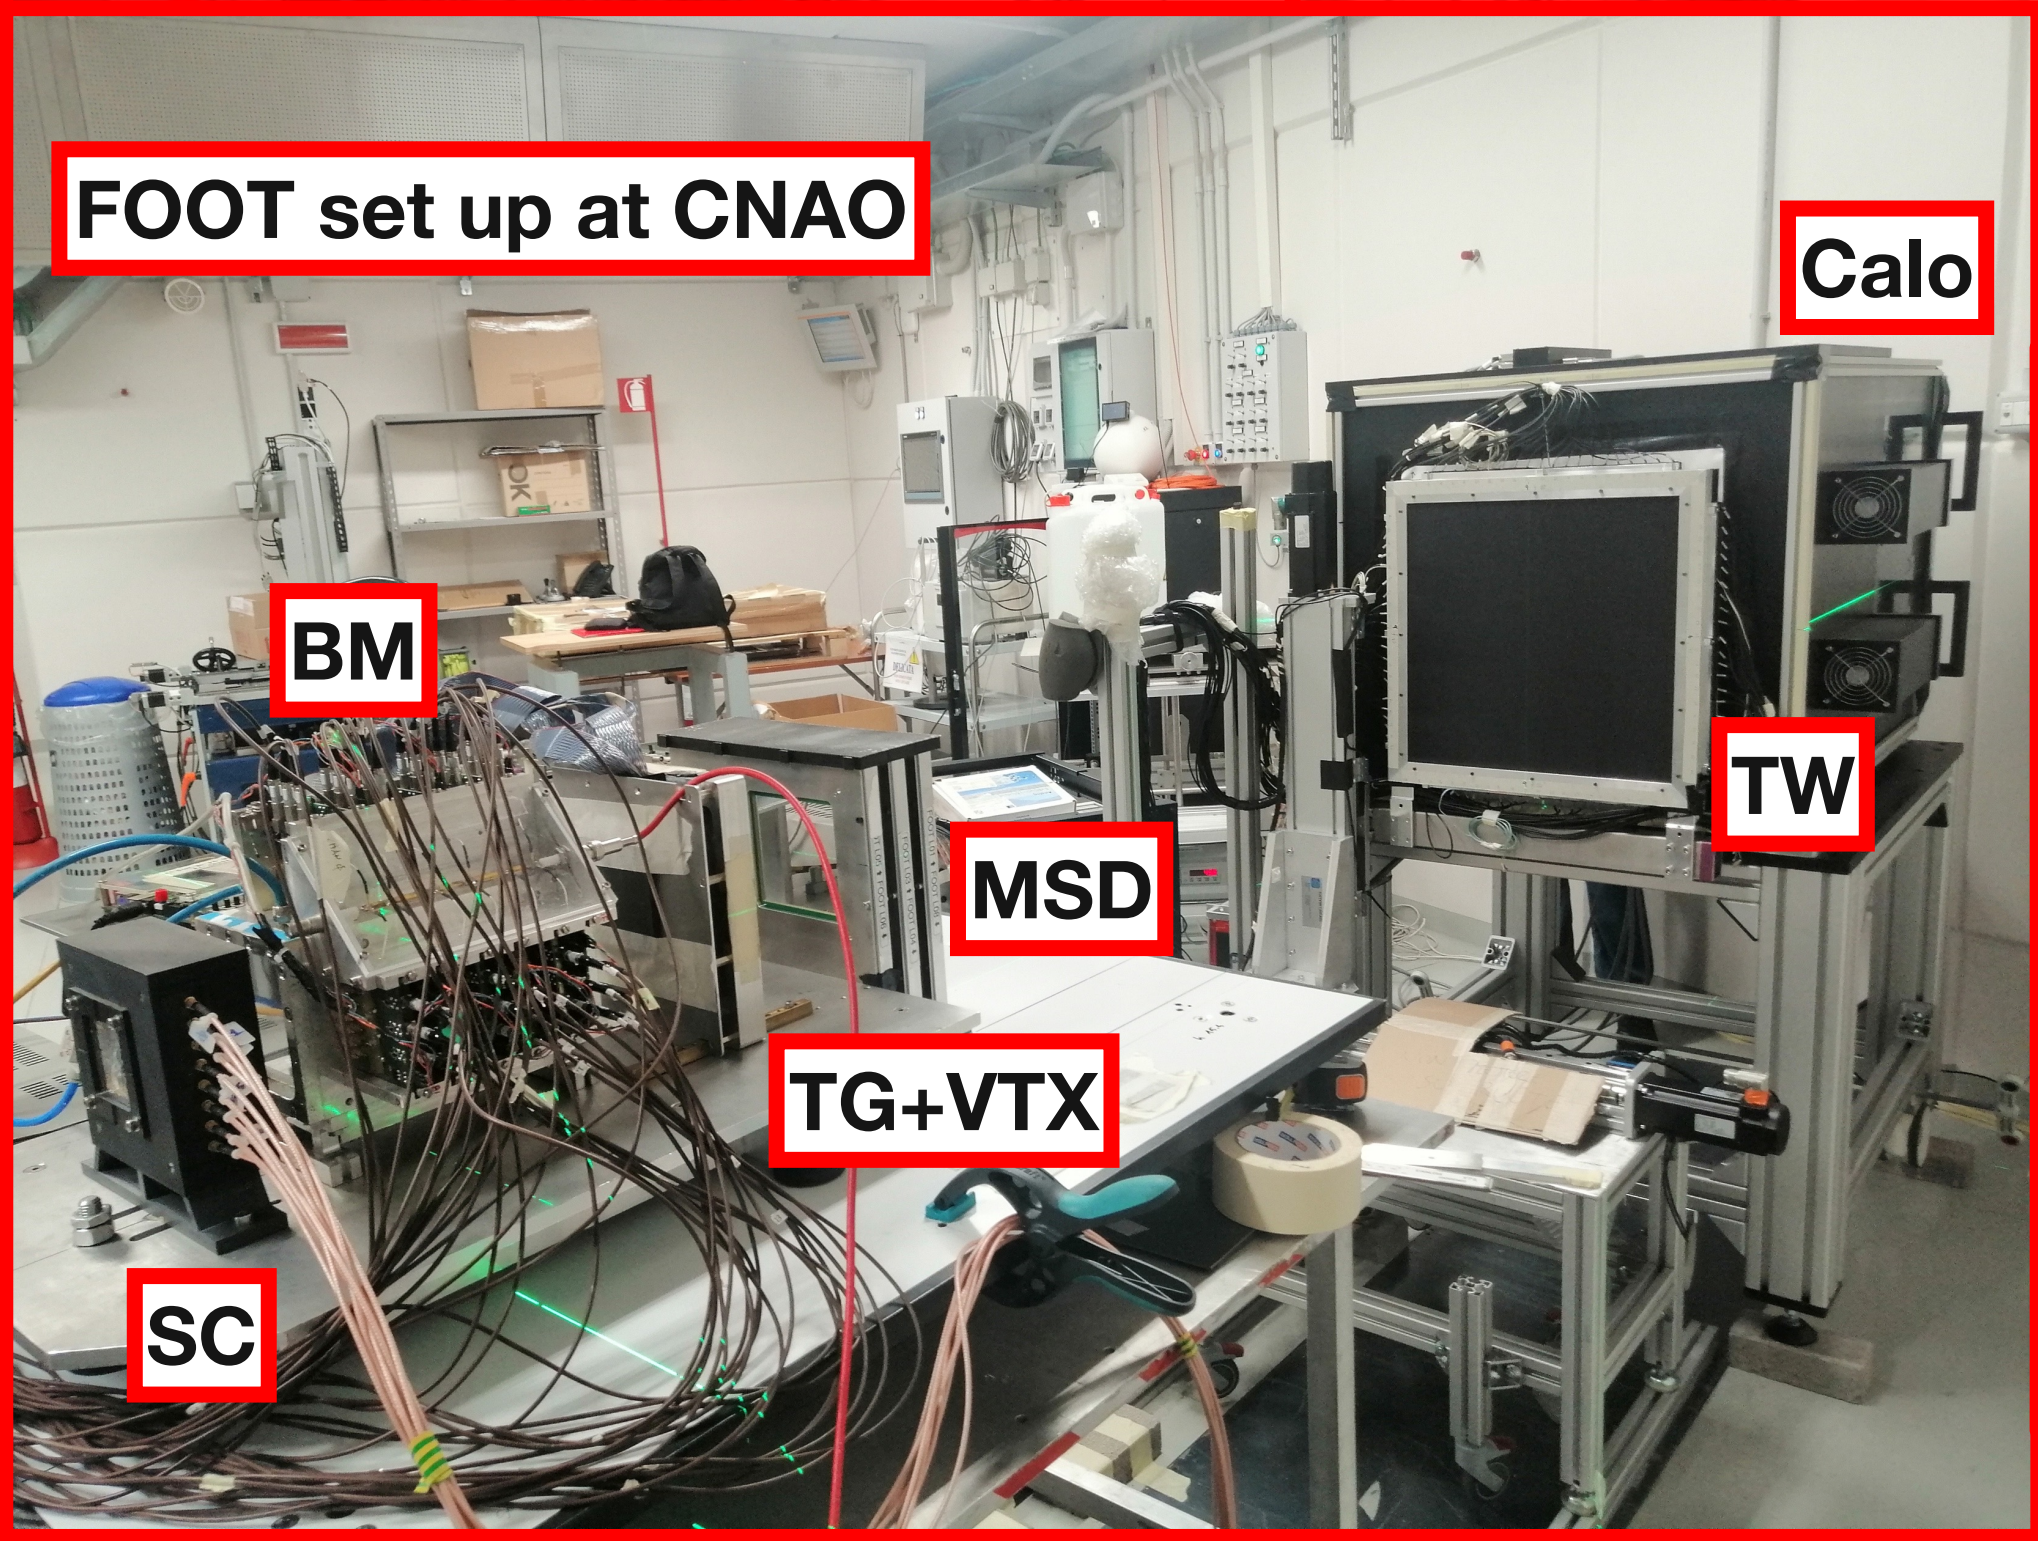

FOOT performances and status

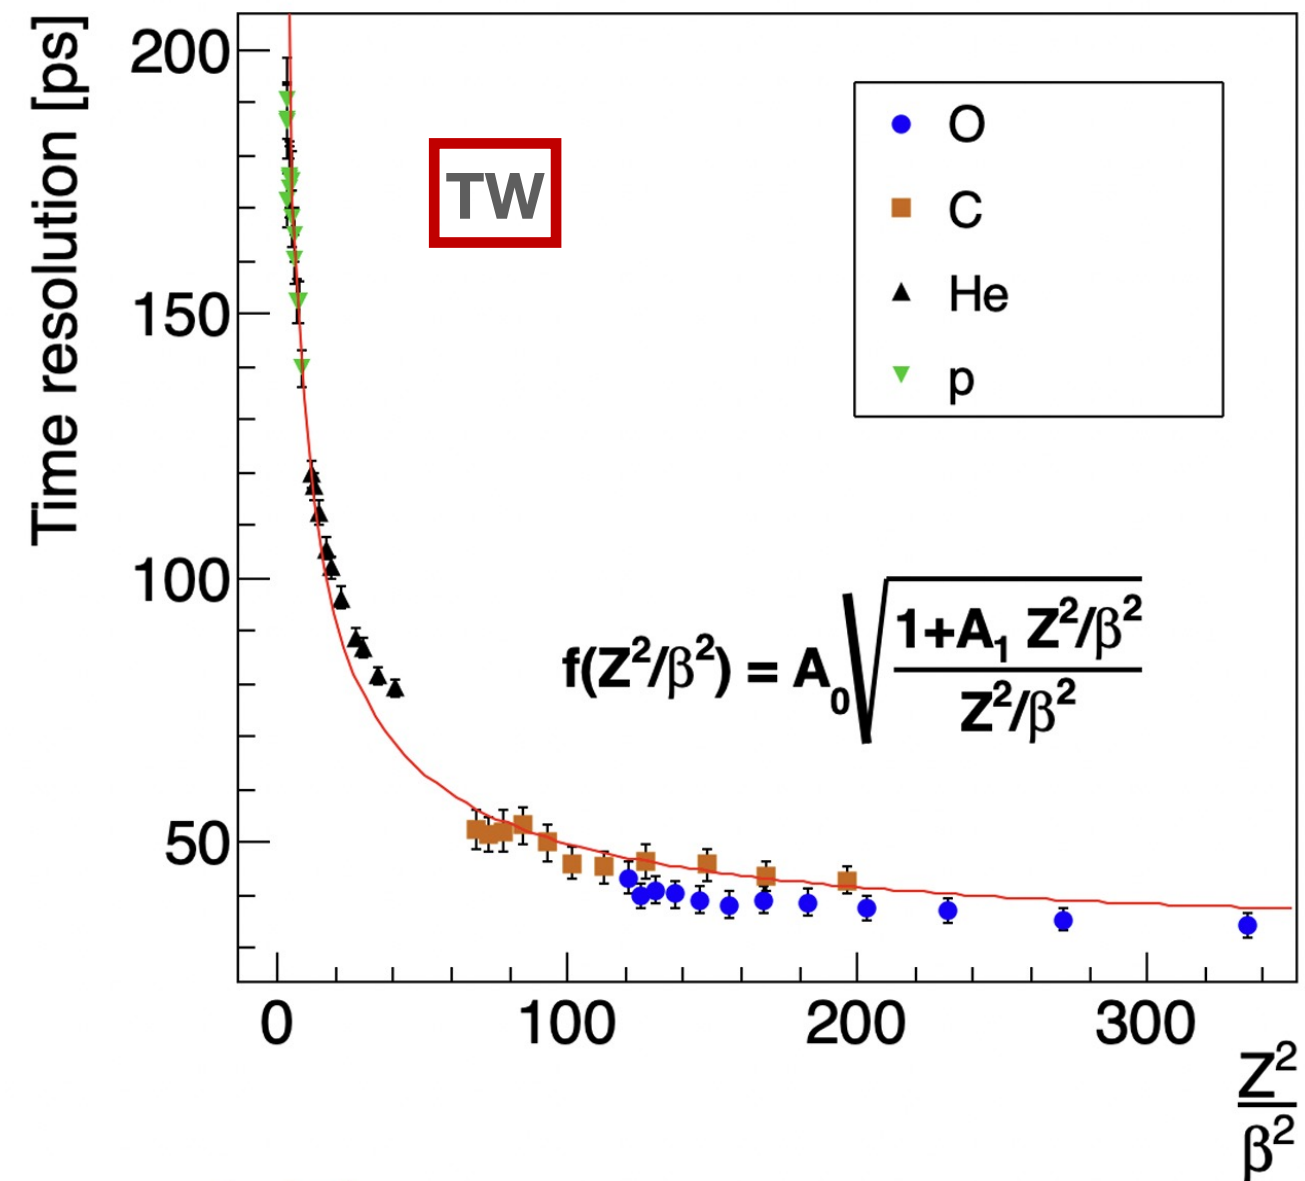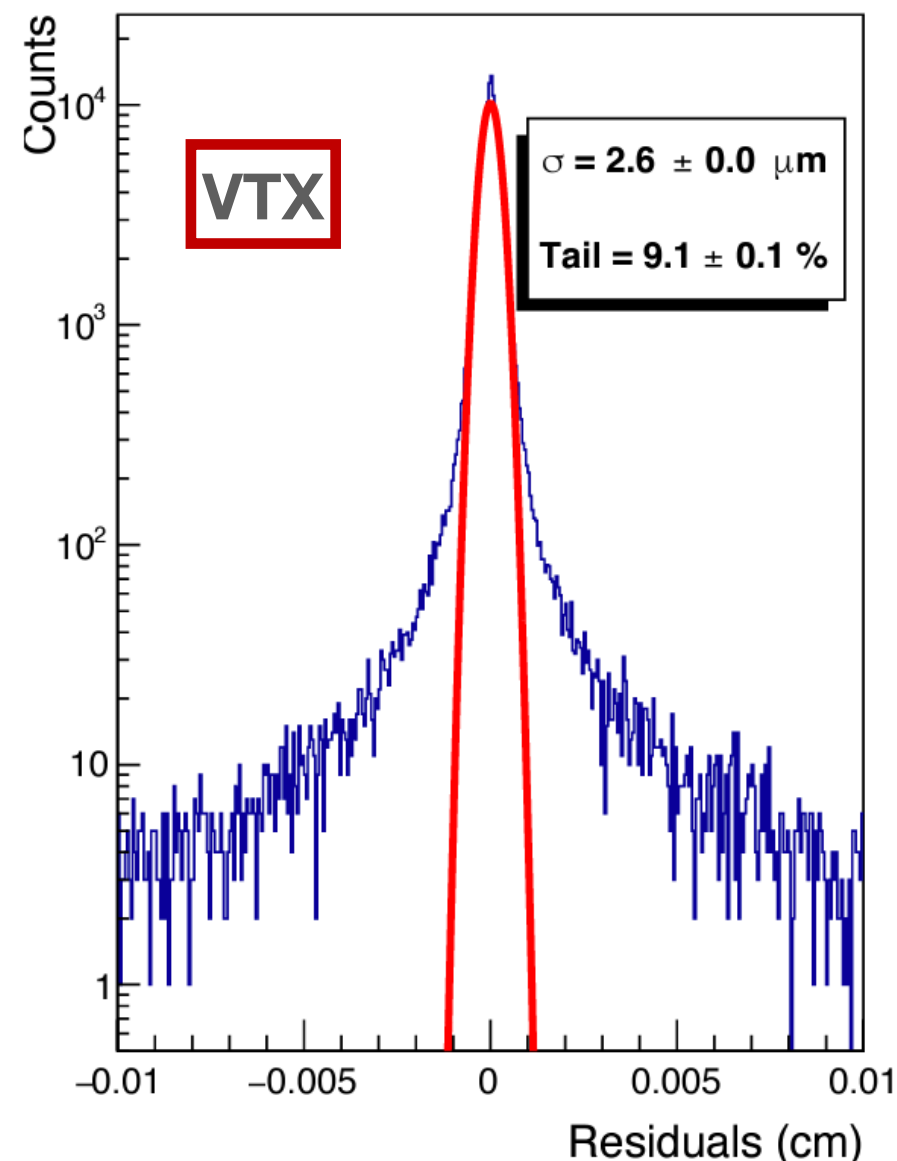
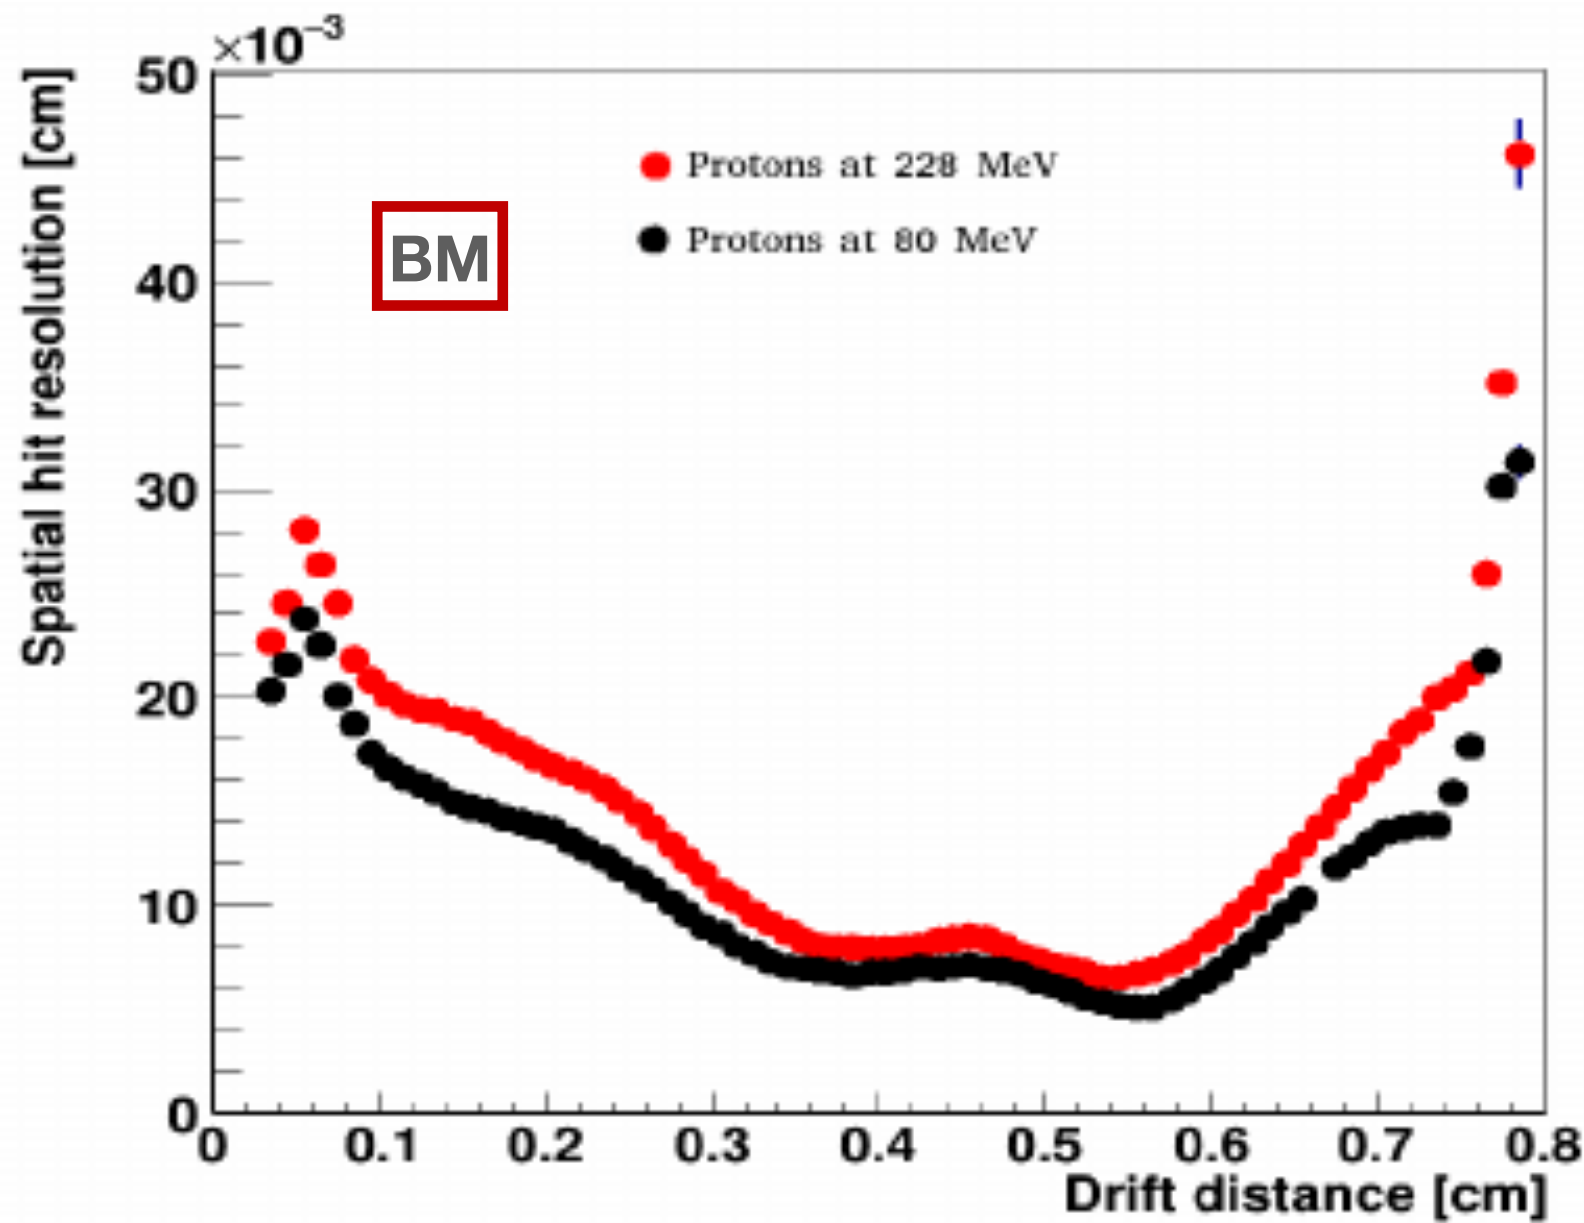


- FOOT performances:**
- ✓ $\sigma(E_{\text{kin}})/E_{\text{kin}} < 3\%$
 - ✓ $\sigma(\Delta E)/\Delta E \sim 4\text{-}5\%$
 - ✓ $\sigma(\text{TOF}) > 50 \text{ ps}$
 - ✓ $\sigma(p)/p < 5\%$

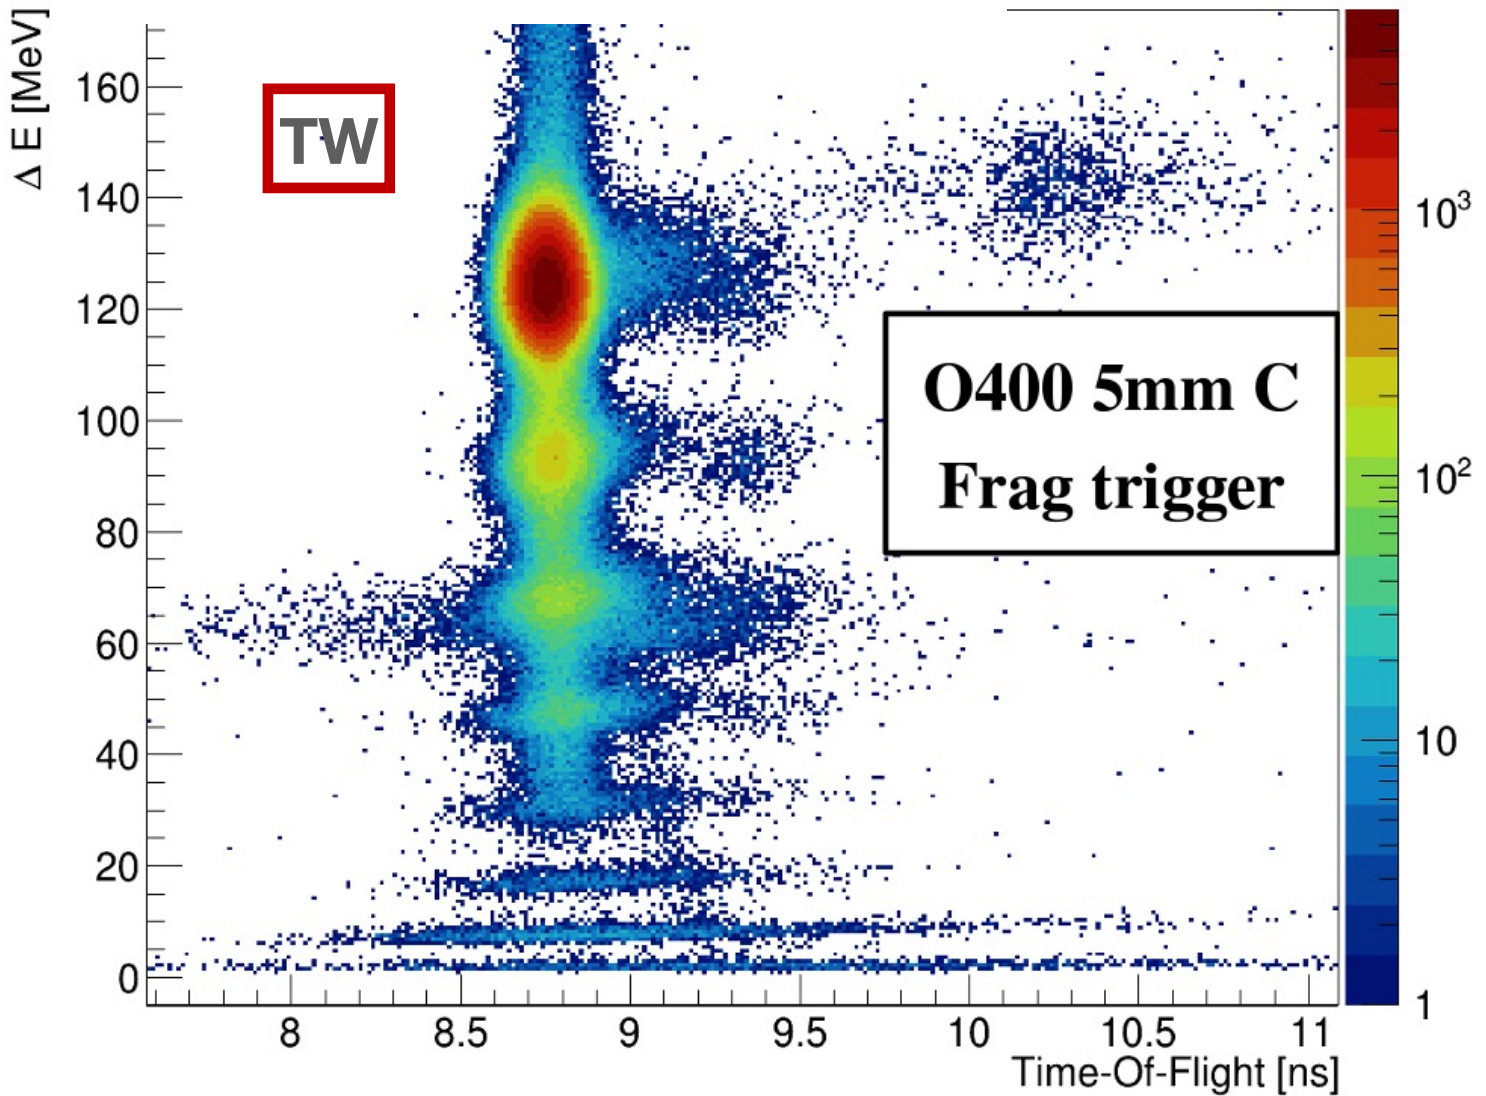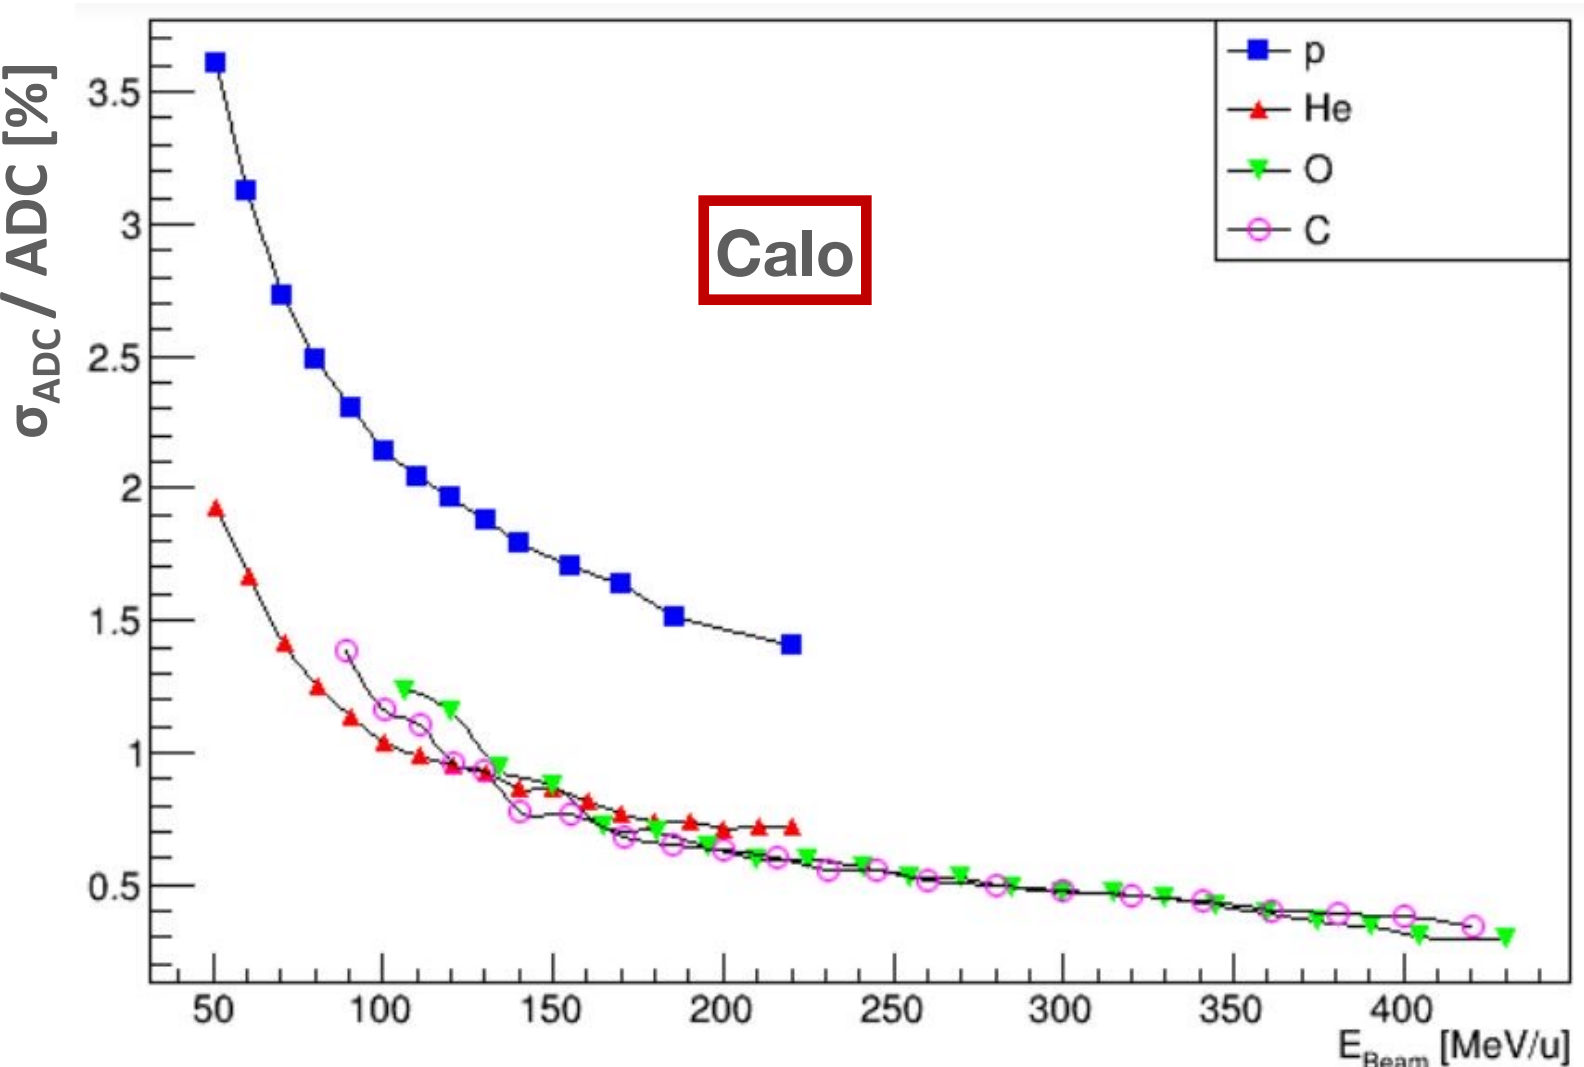

- Detectors status:**
- The setup is almost completed (No magnets yet)
 - Different detectors already characterized: TOF system, Drift chamber, Vertex
 - Characterization of trackers (IT and MSD) and calorimeter ongoing

Fragmentation of ^{16}O beam [400 MeV/u] on C target


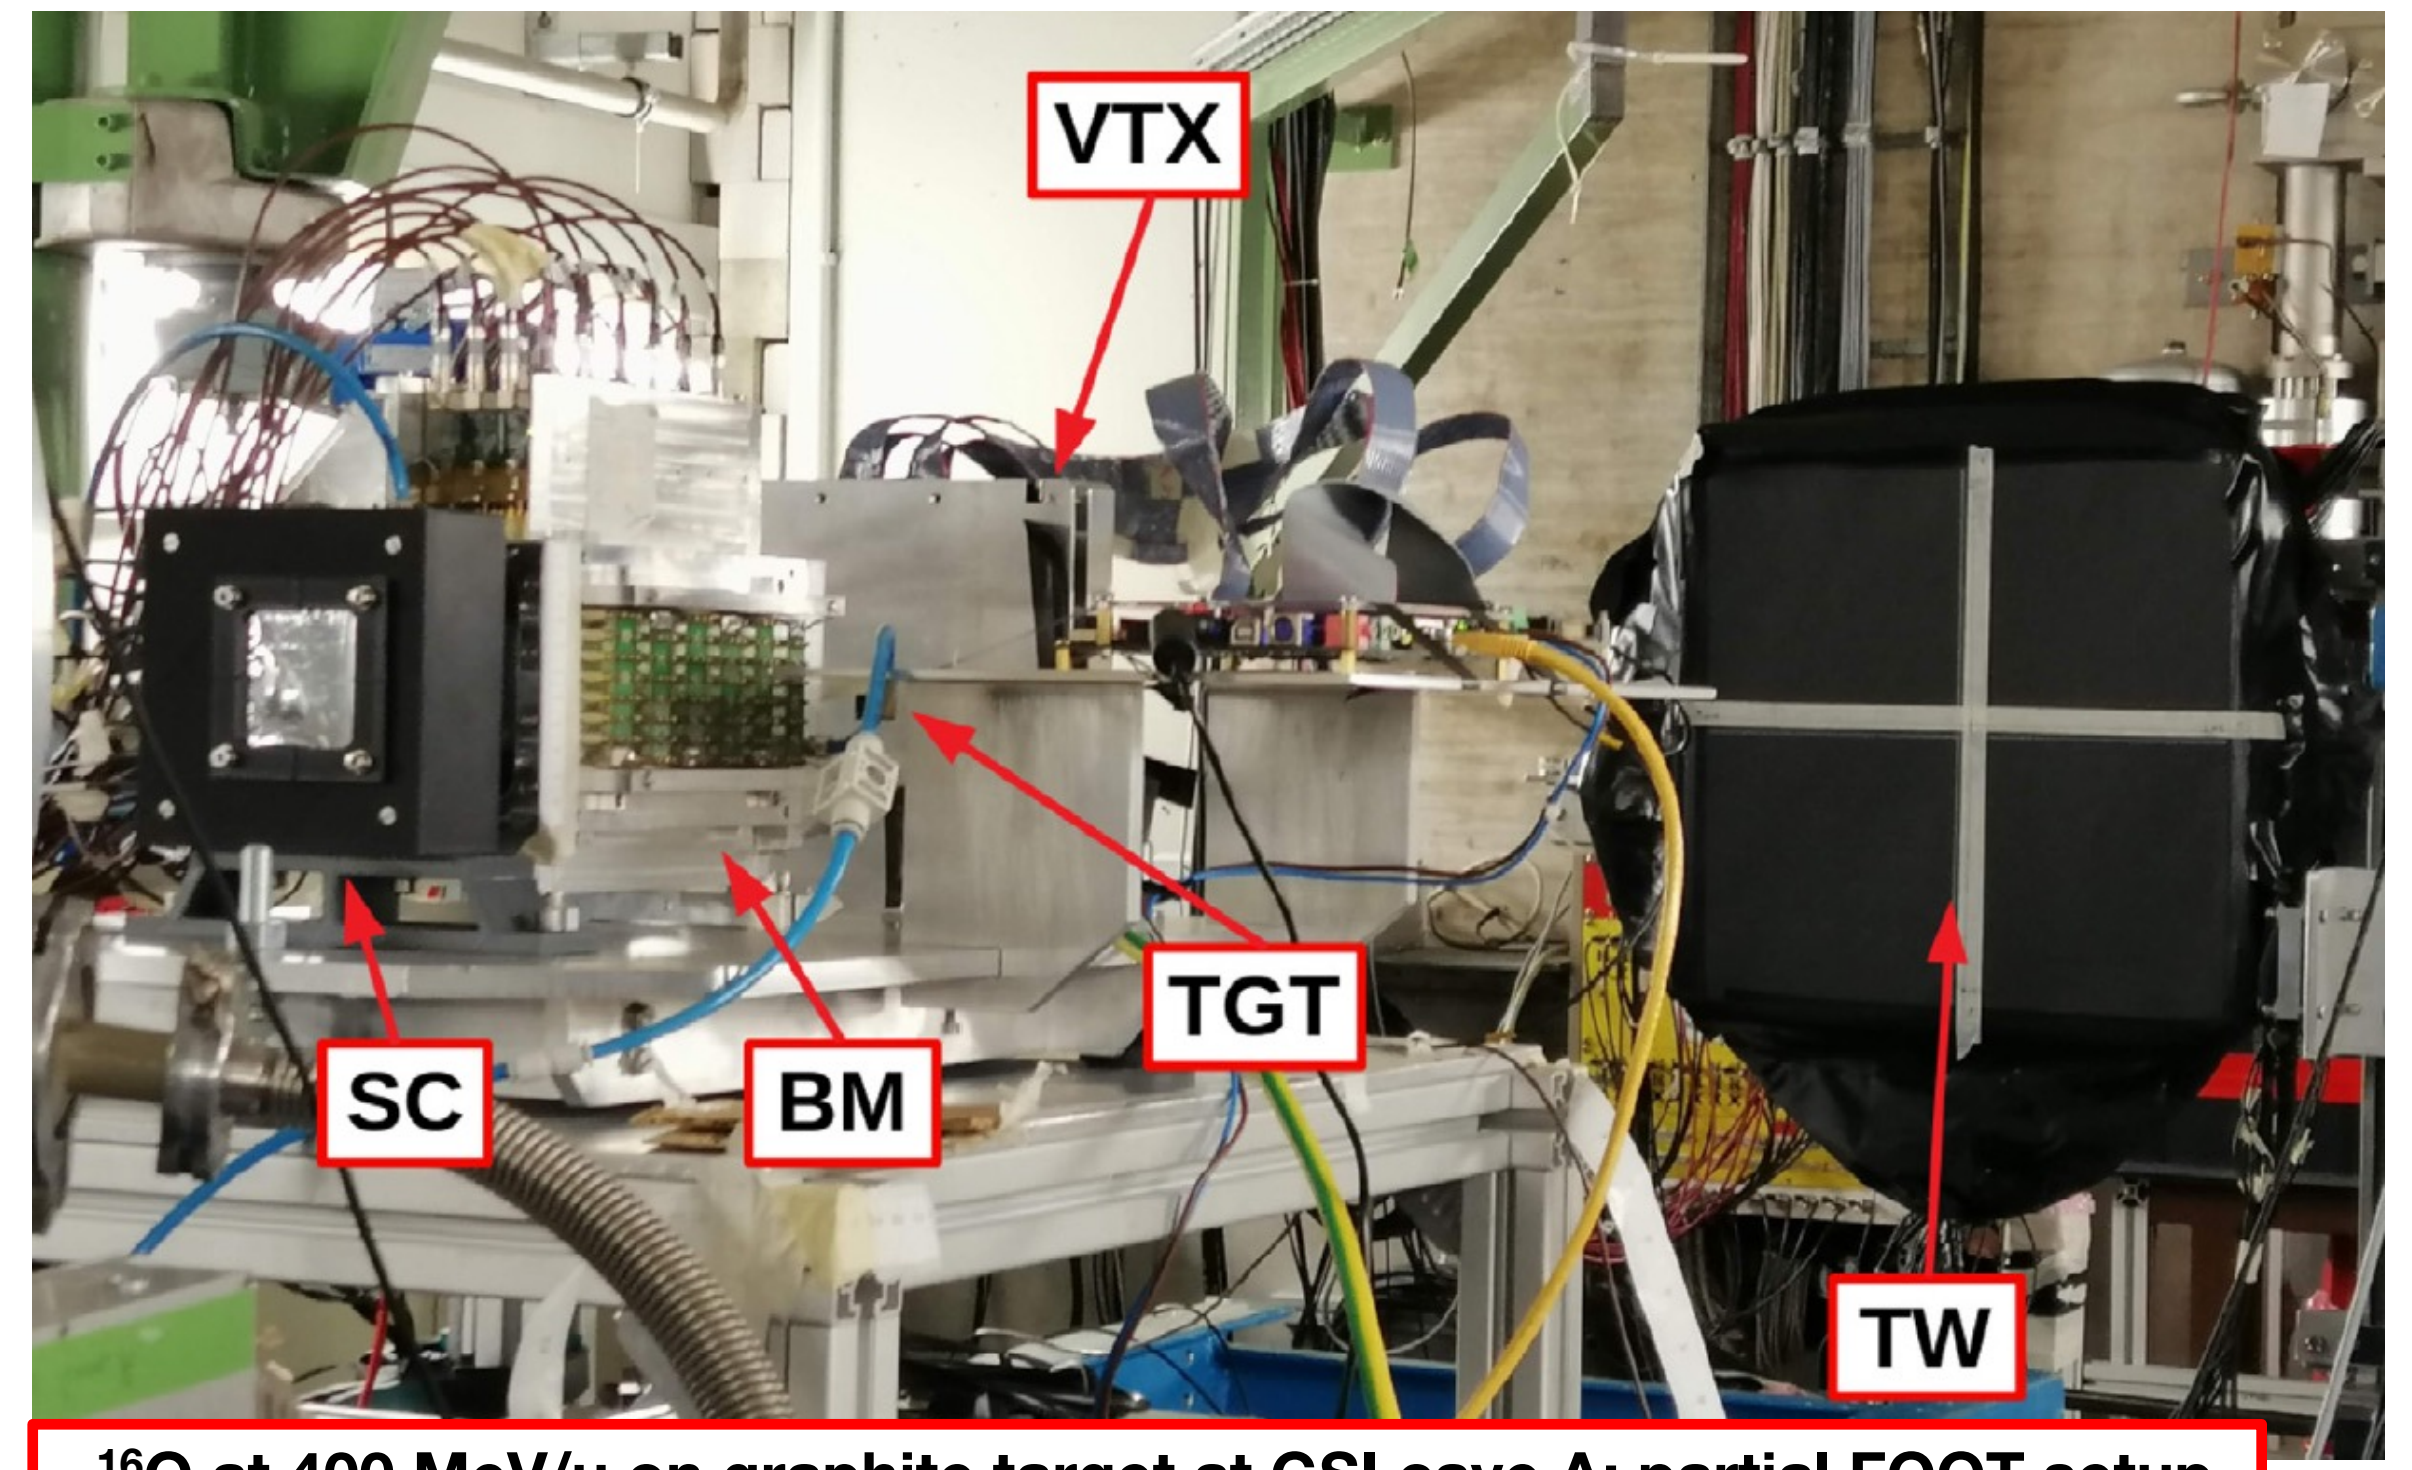
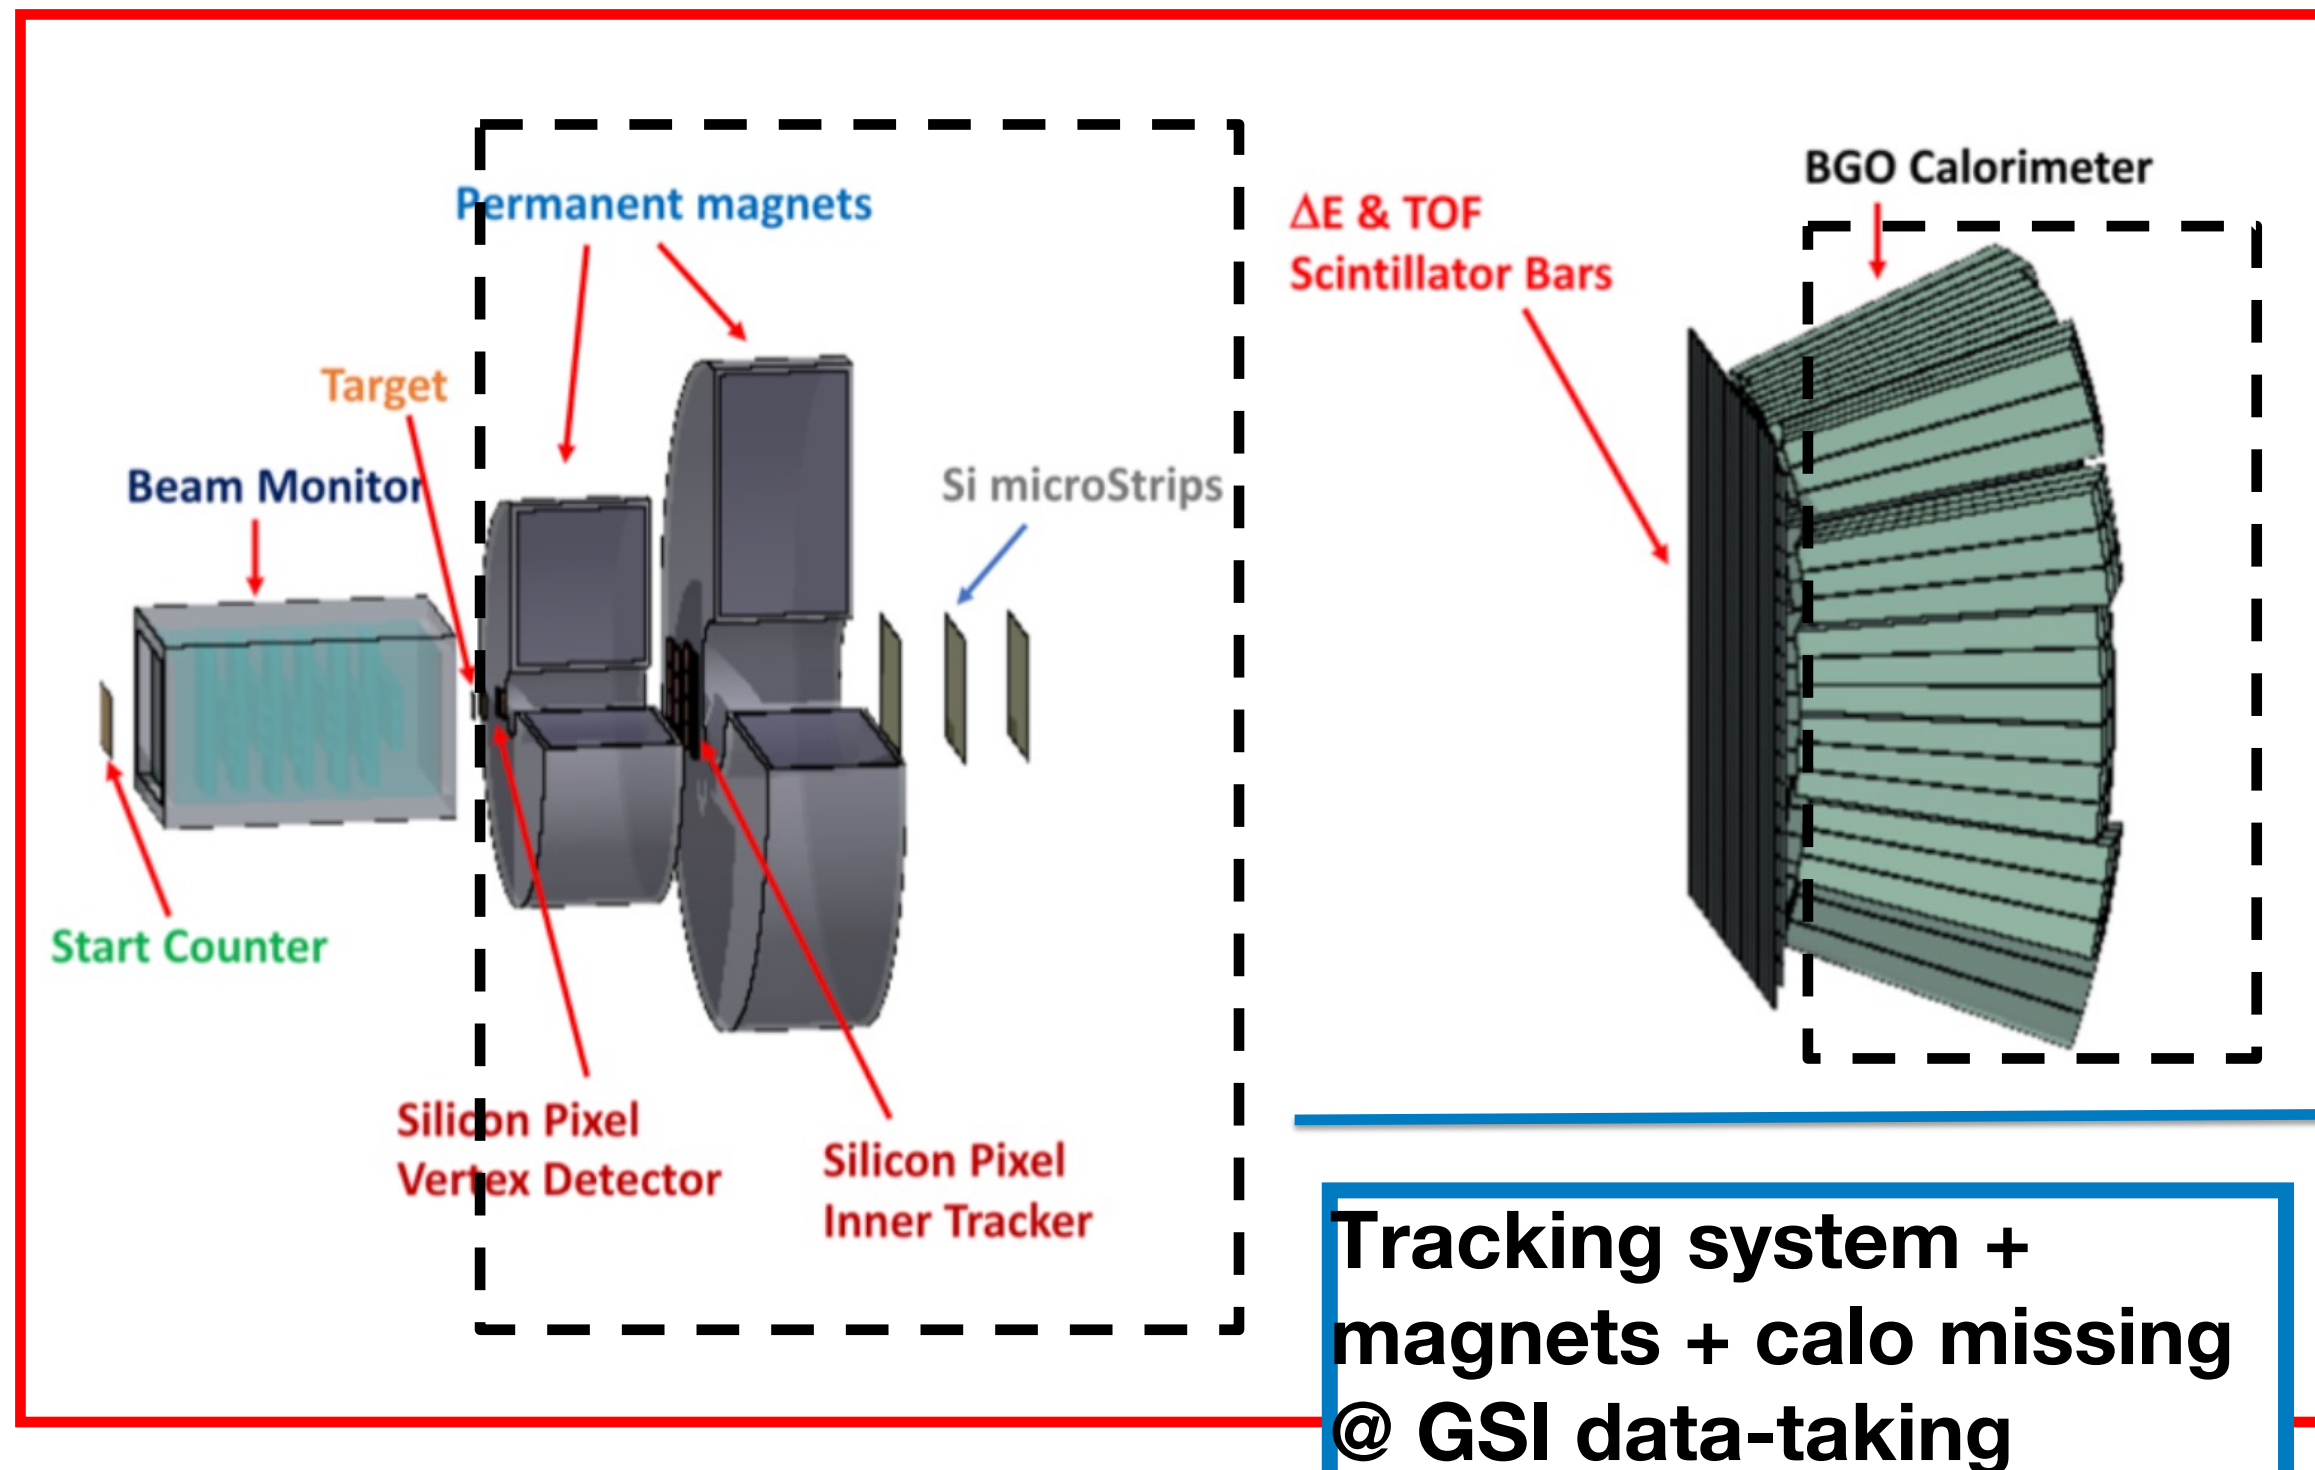


^{16}O at 400 MeV/u on graphite target at GSI cave A: partial FOOT setup

- Only SC, BM, and TW detector (scintillating bars)
- ΔE -TOF system for nuclear charge identification
- Elemental fragmentation cross sections of ^{16}O at 400 MeV/u on C target
- Definition of a trigger strategy as alternative to Minimum Bias trigger


[Limited acquisition time and available space (“table top experiment”)]

Fragmentation of ^{16}O beam [400 MeV/u] on C target

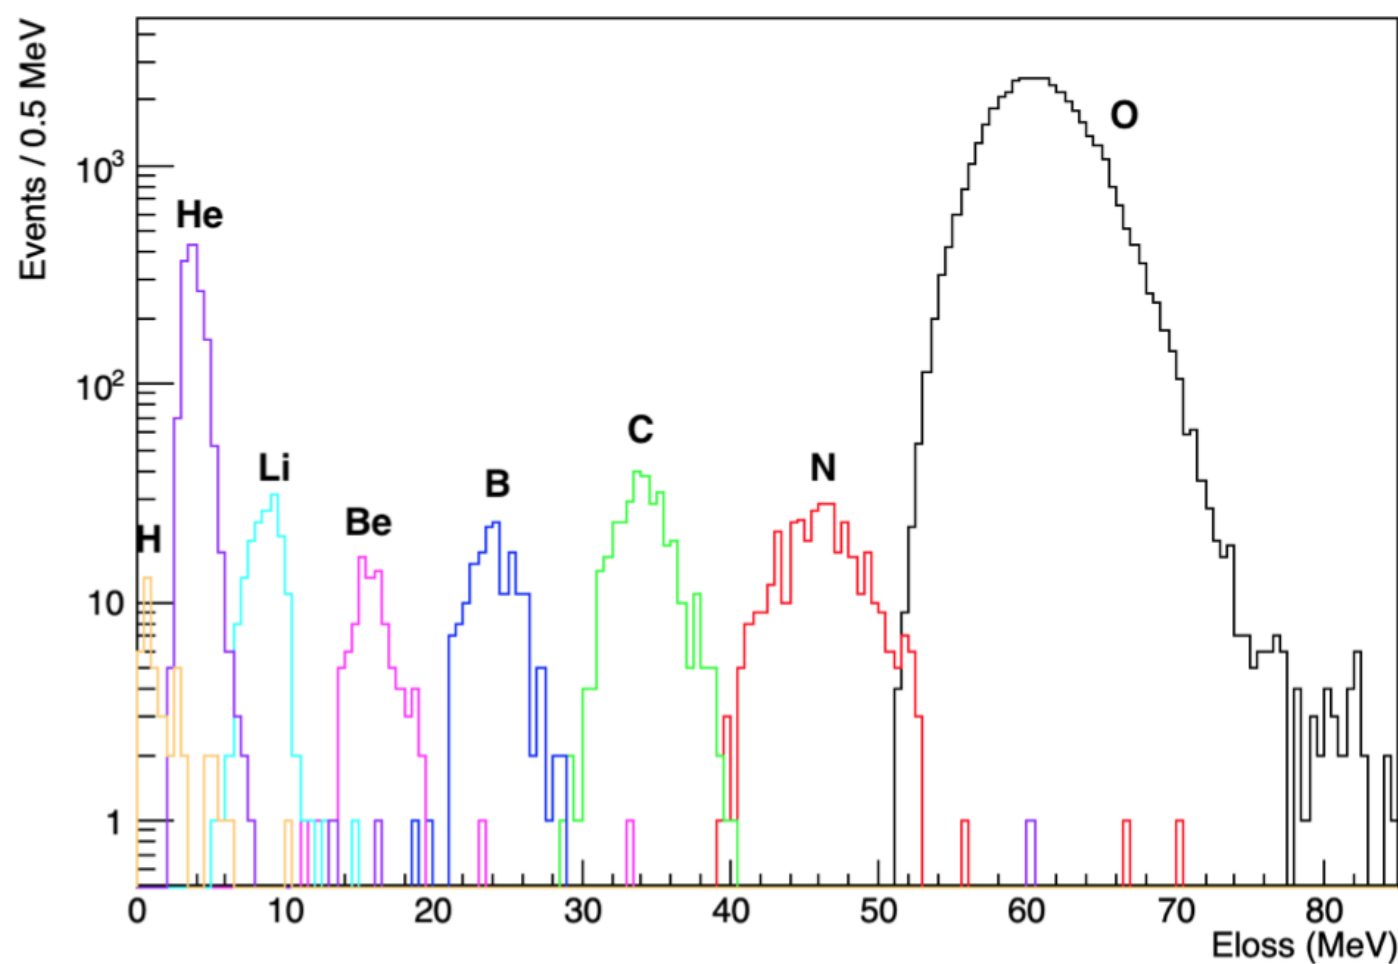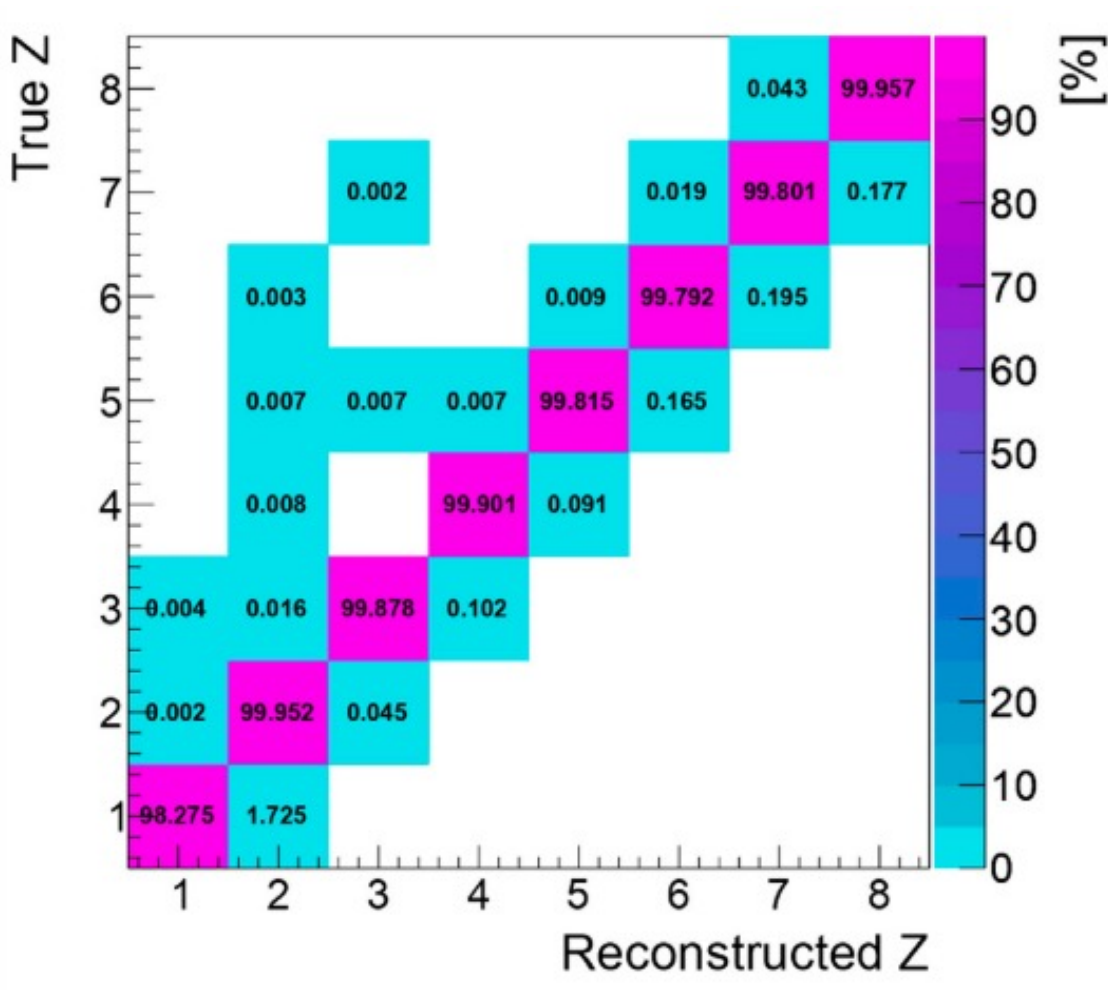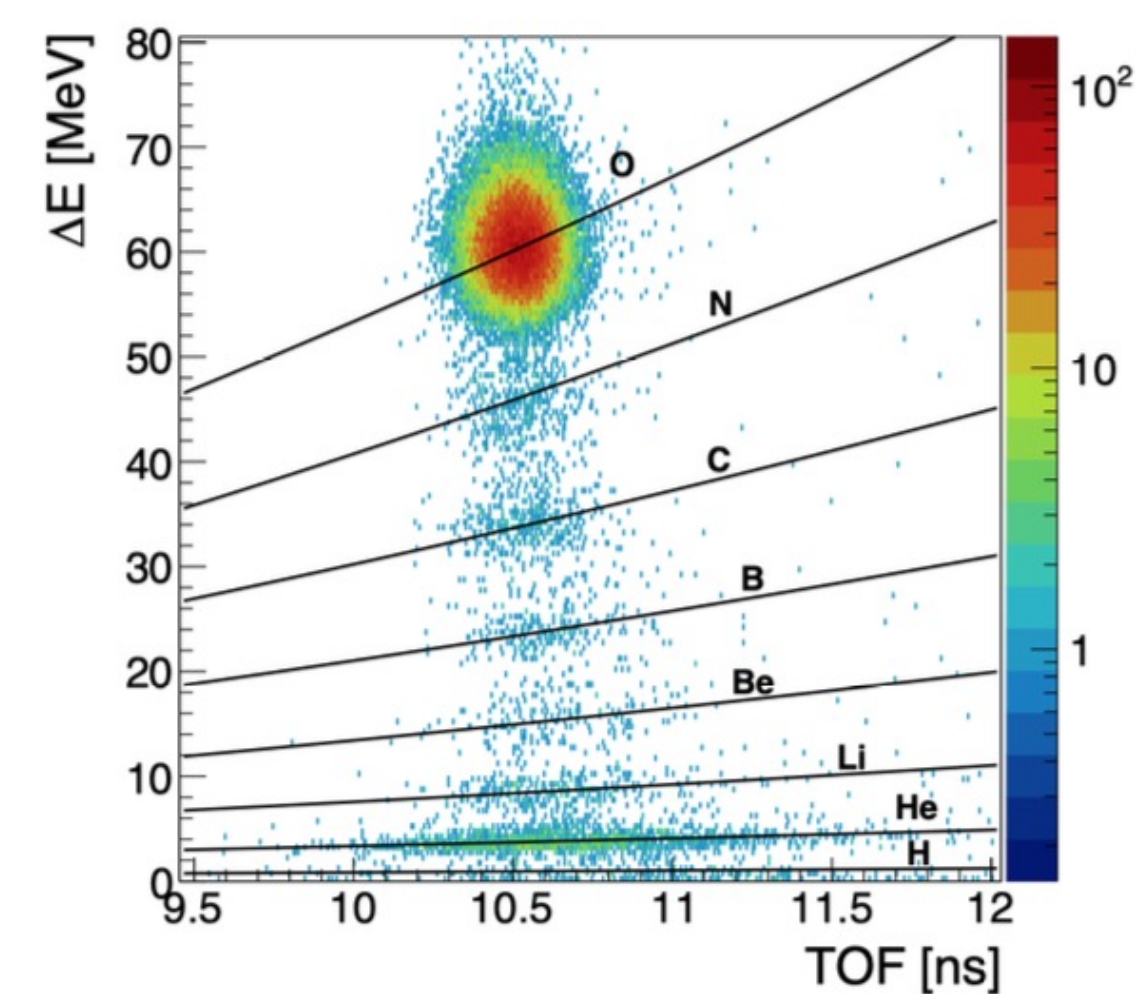

Fragments charge identifications with the ΔE -ToF system

Elemental fragmentation cross section for $1 < Z < 8$

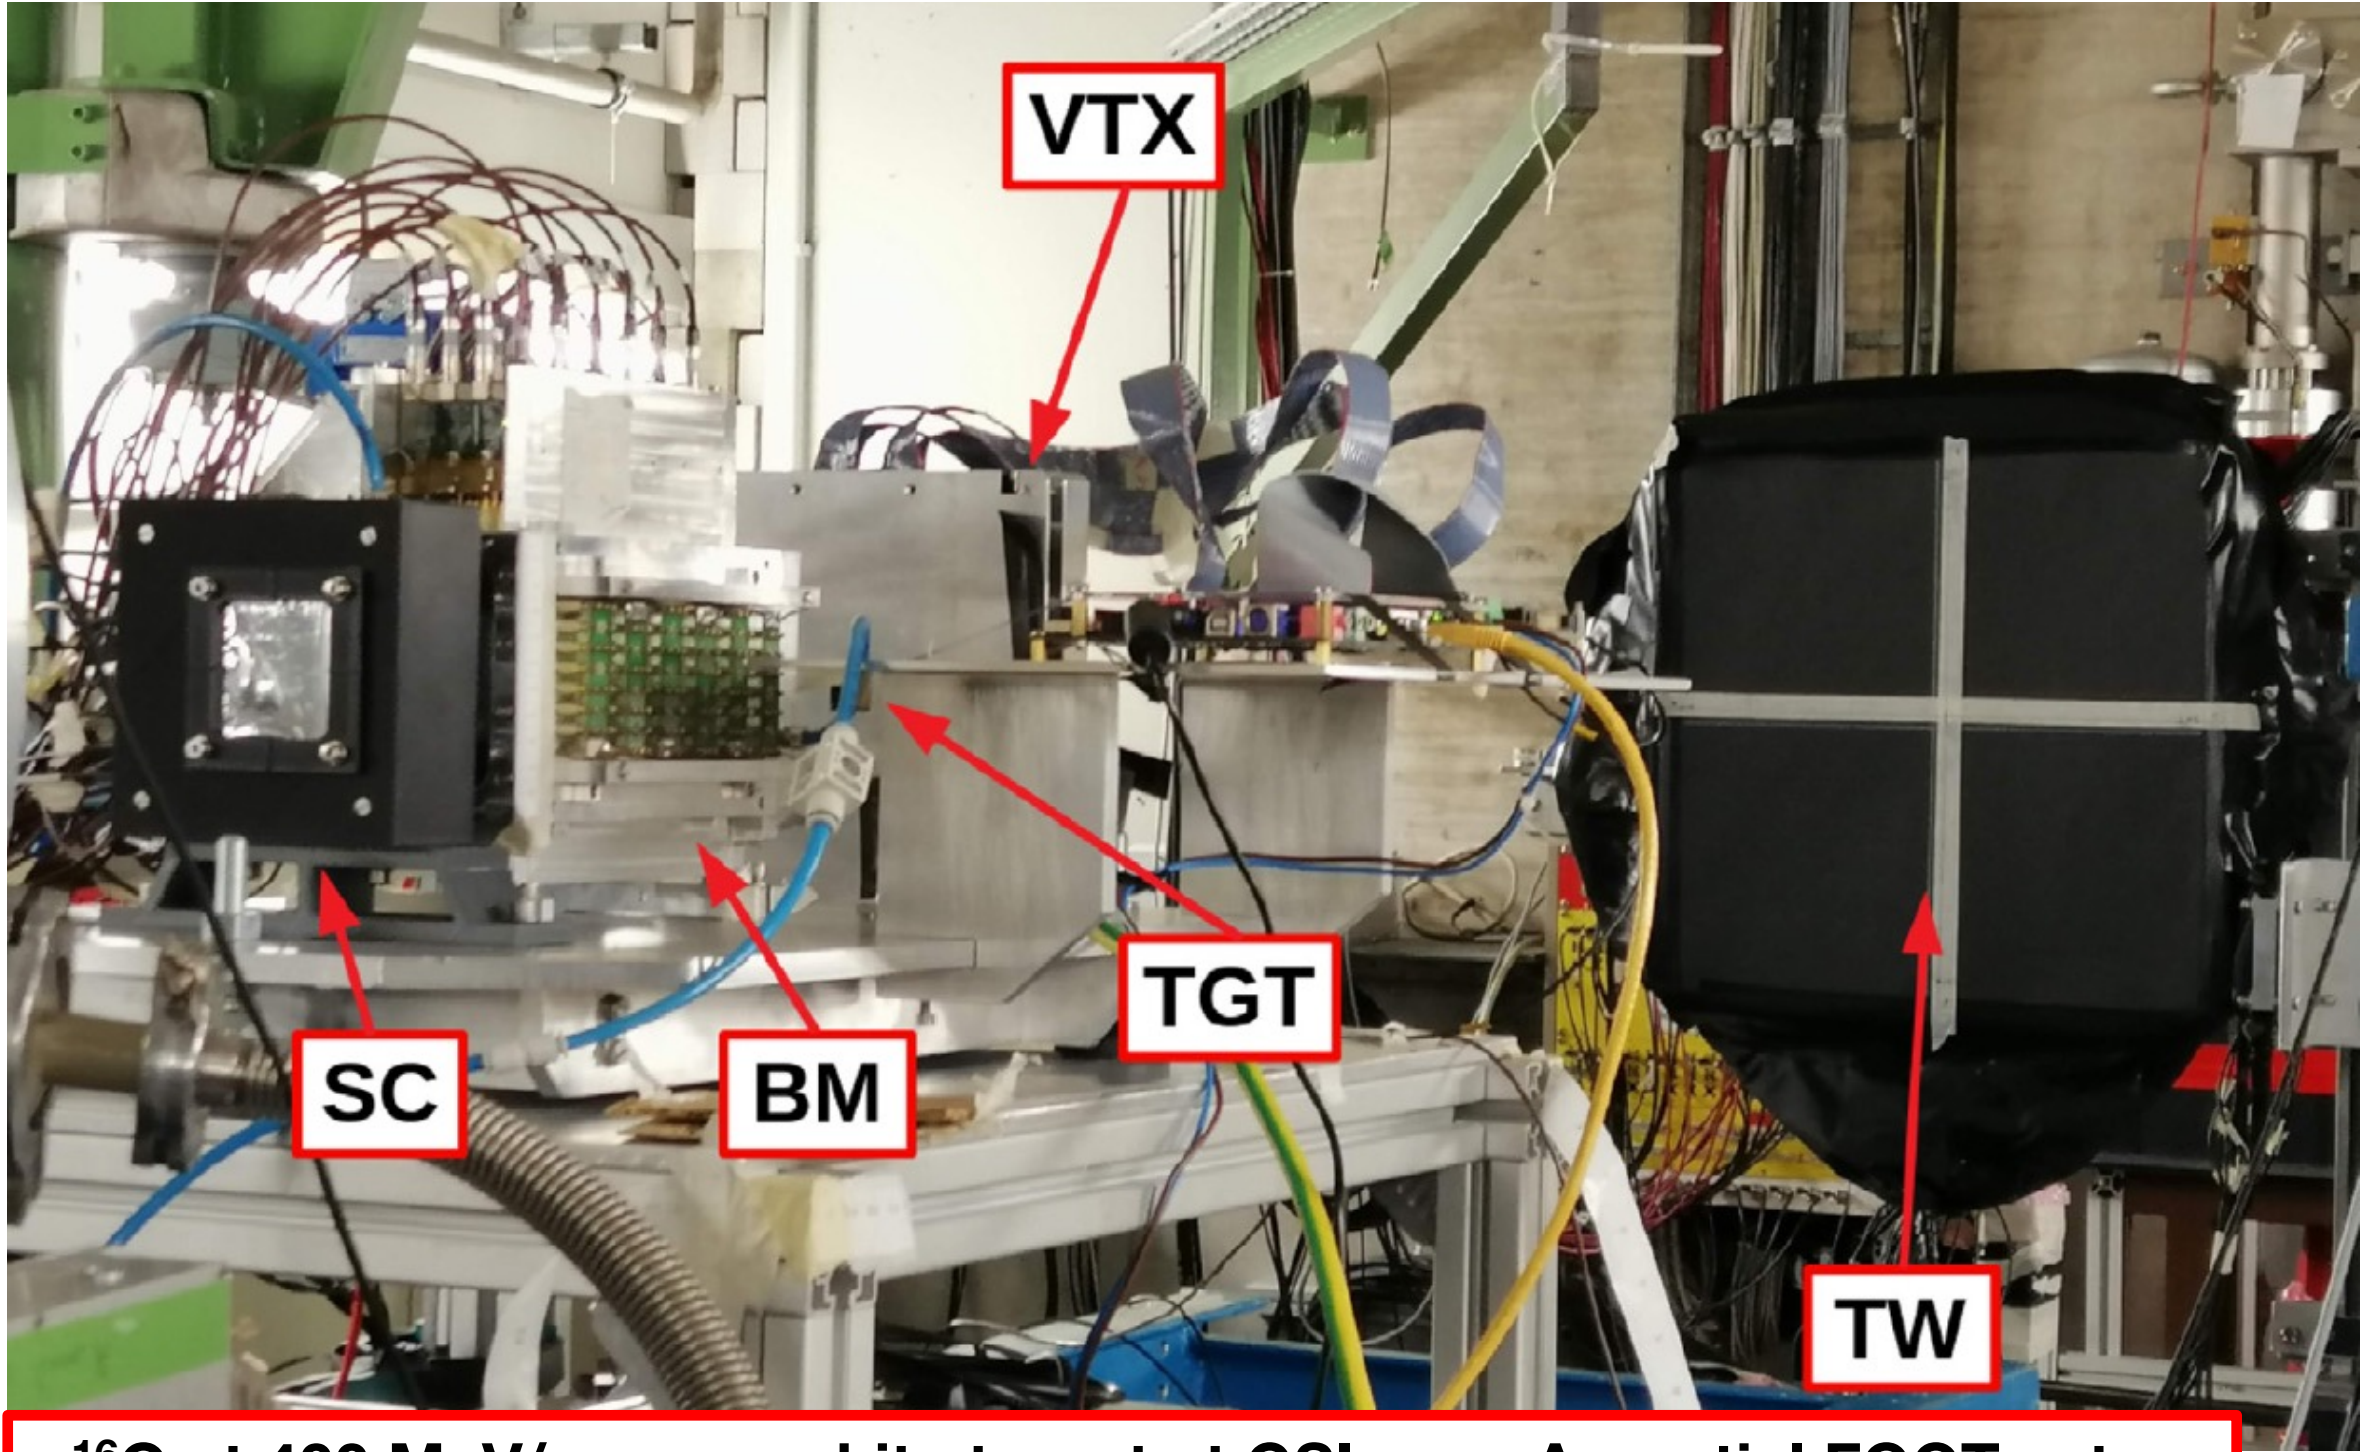

^{16}O at 400 MeV/u on graphite target at GSI cave A: partial FOOT setup

Element	$\sigma_{frag} \pm \Delta_{stat} \pm \Delta_{sys}$ [mbarn]	$\Delta_{stat}/\sigma_{frag}$	$\Delta_{sys}/\sigma_{frag}$	σ_{MC} [mbarn]
He	$789 \pm 35 \pm 67$	4.4 %	8.5 %	705 ± 2
Li	$101 \pm 13 \pm 10$	12.5 %	10.4 %	74.9 ± 0.6
Be	$33 \pm 9 \pm 3$	26 %	10.3 %	37.5 ± 0.4
B	$78 \pm 11 \pm 6$	14 %	8.5 %	41.8 ± 0.4
C	$131 \pm 14 \pm 4$	11 %	2.8 %	87.7 ± 0.6
N	$117 \pm 14 \pm 6$	12 %	4.8 %	110.3 ± 0.7



Toppi M. et al, Front. Phys. 10:979229. doi: 10.3389/fphy.2022.979229

Conclusions

- The **FOOT experiment** is designed for the measurement of **the fragmentation differential cross sections** of interest in Particle Therapy and radio protection in space with an accuracy better than 10%
- The **final set up** is almost completed (Inner Tracker (IT) + Calo still in development, Magnet not present yet). Characterization of trackers (IT and MSD) and calorimeter ongoing
- Data takings performed at GSI, HIT and CNAO with an increasing set-up provided many data for study FOOT performances/calibration and improve our detector knowledge (trigger, rate capability, DAQ, on-line monitoring and reconstruction) and beam characteristics (CNAO)
- Some data available for physics (some for Z and some also for mass identification) for ^4He ^{12}C and ^{16}O beam at different energies impinging on C and C_2H_4
- First elemental fragmentation cross section measurement of a ^{16}O beam at 400 MeV/u with a partial setup, integrated in the detector acceptance
- Huge effort of the collaboration in continuous data taking activity, now it's time for analysis...
- **At the end of the 2023 the first data taking with magnet is expected at CNAO**

Spare Slides




Particle Therapy

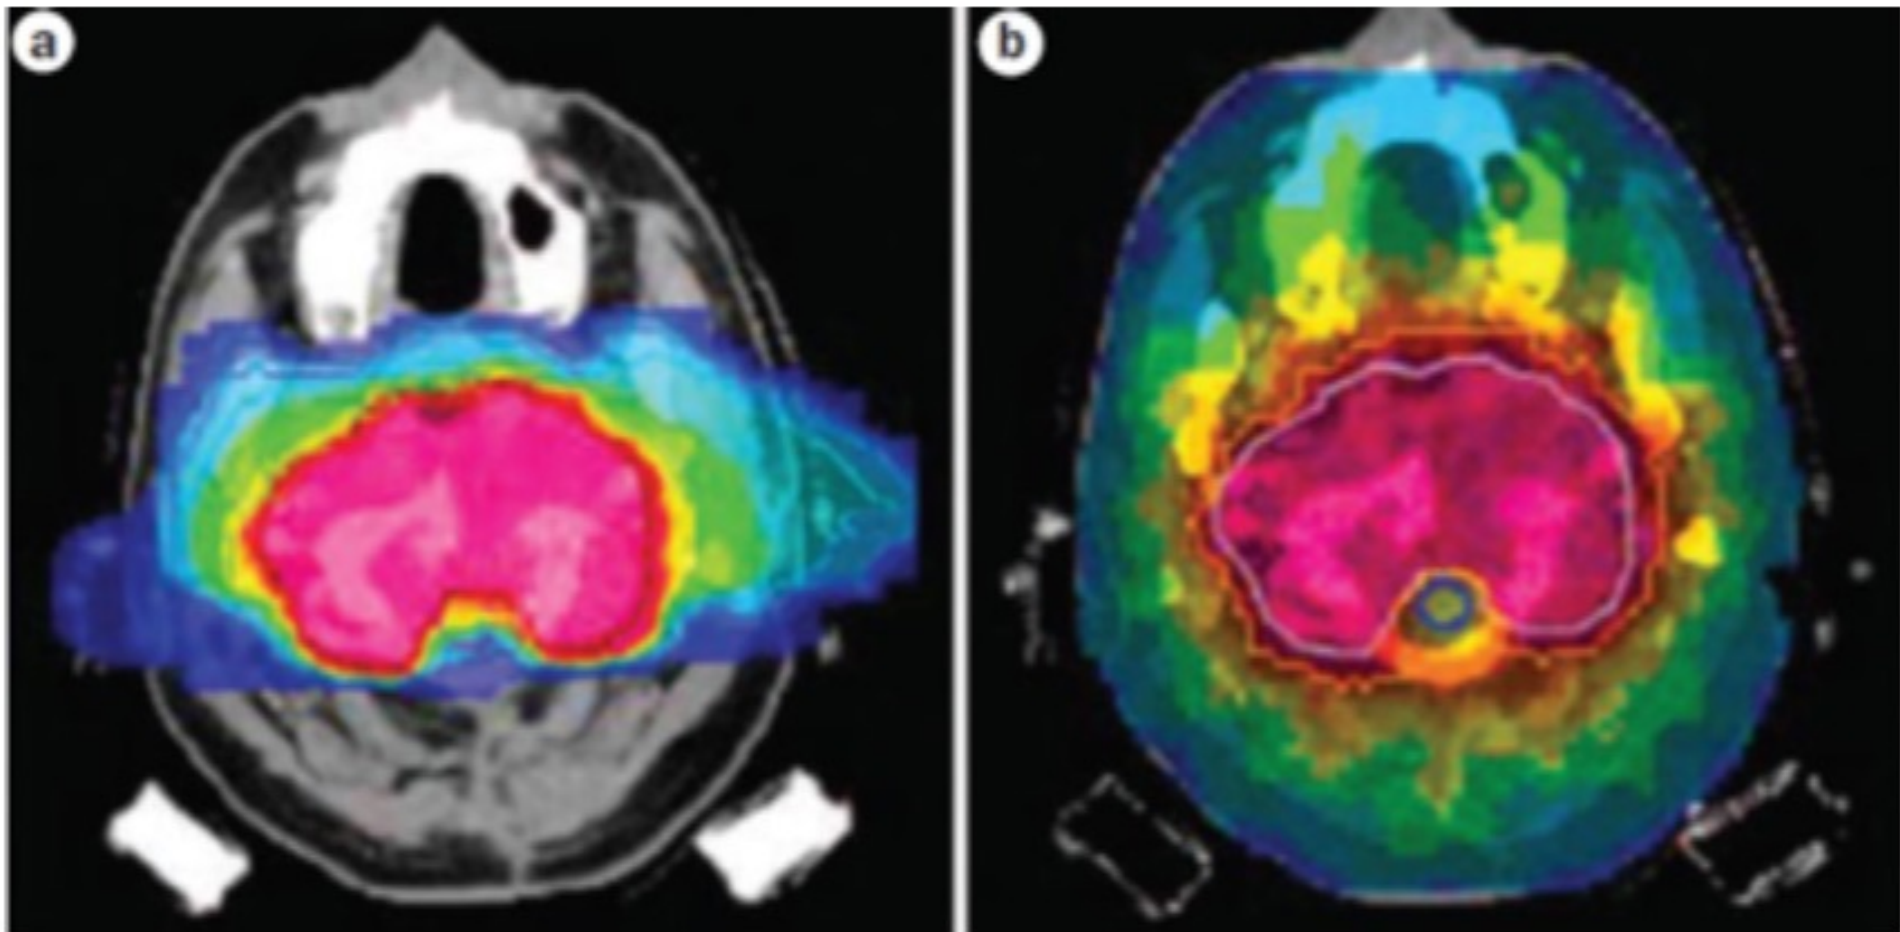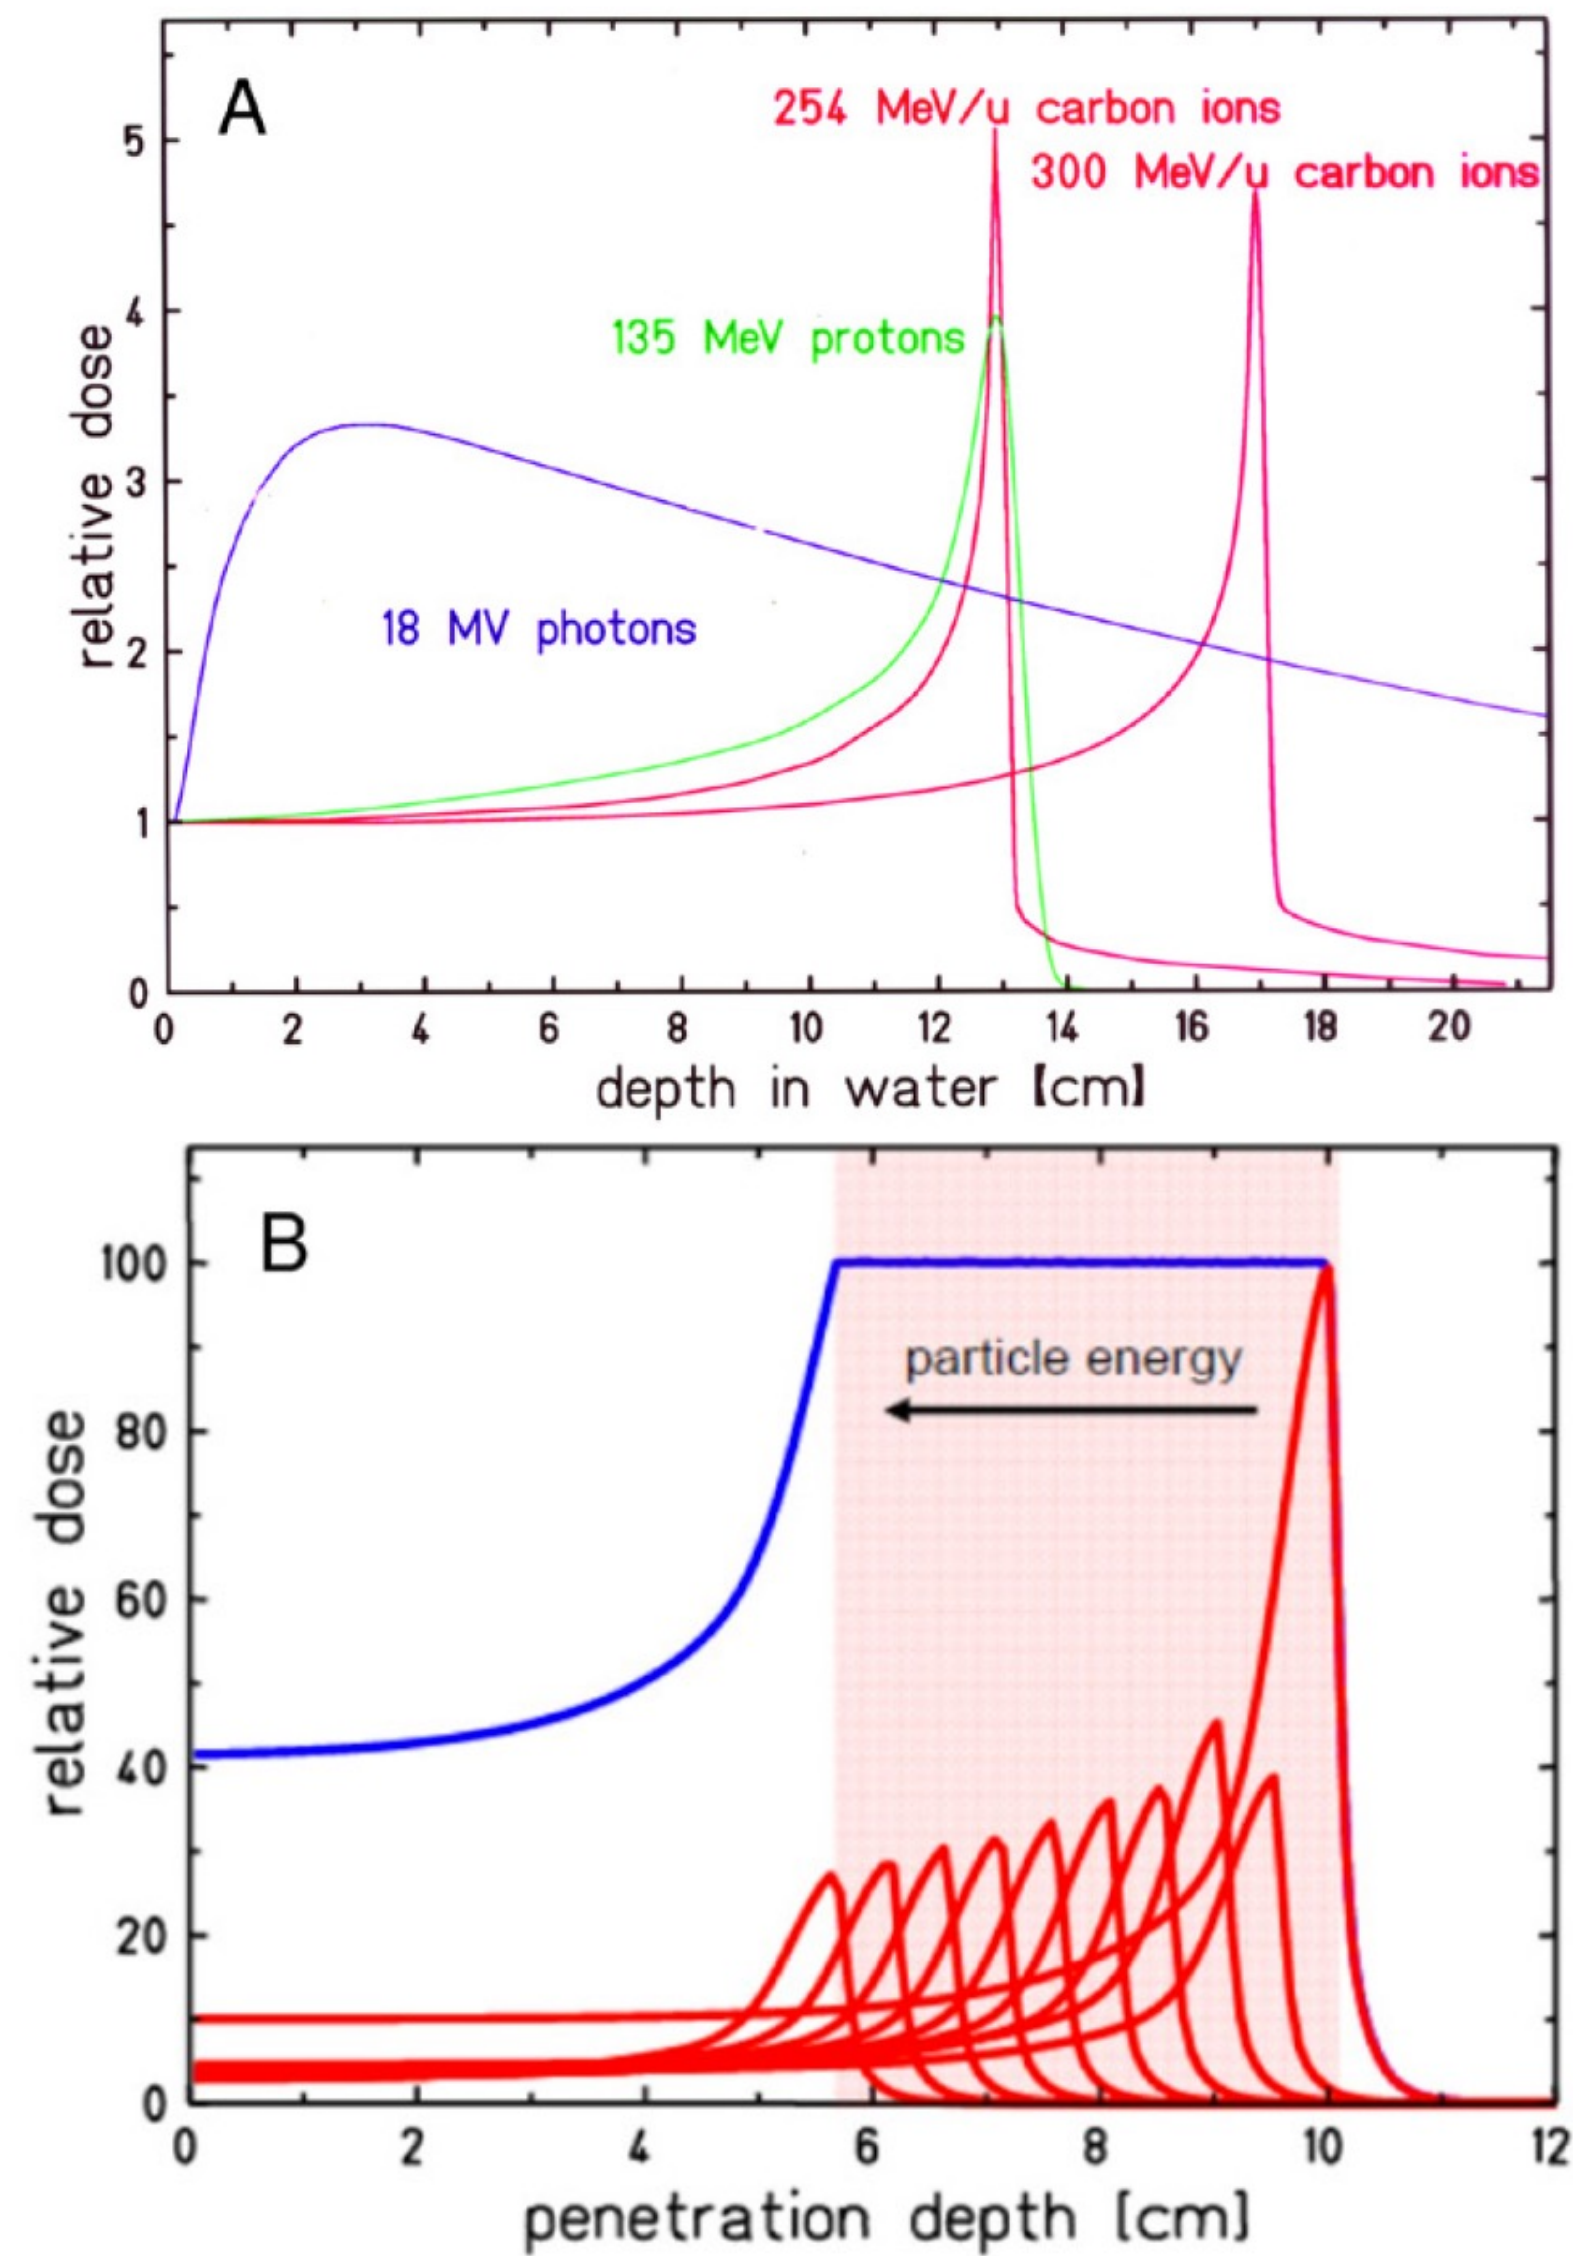


Improve TPS for PT through fragmentation measurements

Monitoring in PT

Fragmentation Impact on Particle Therapy

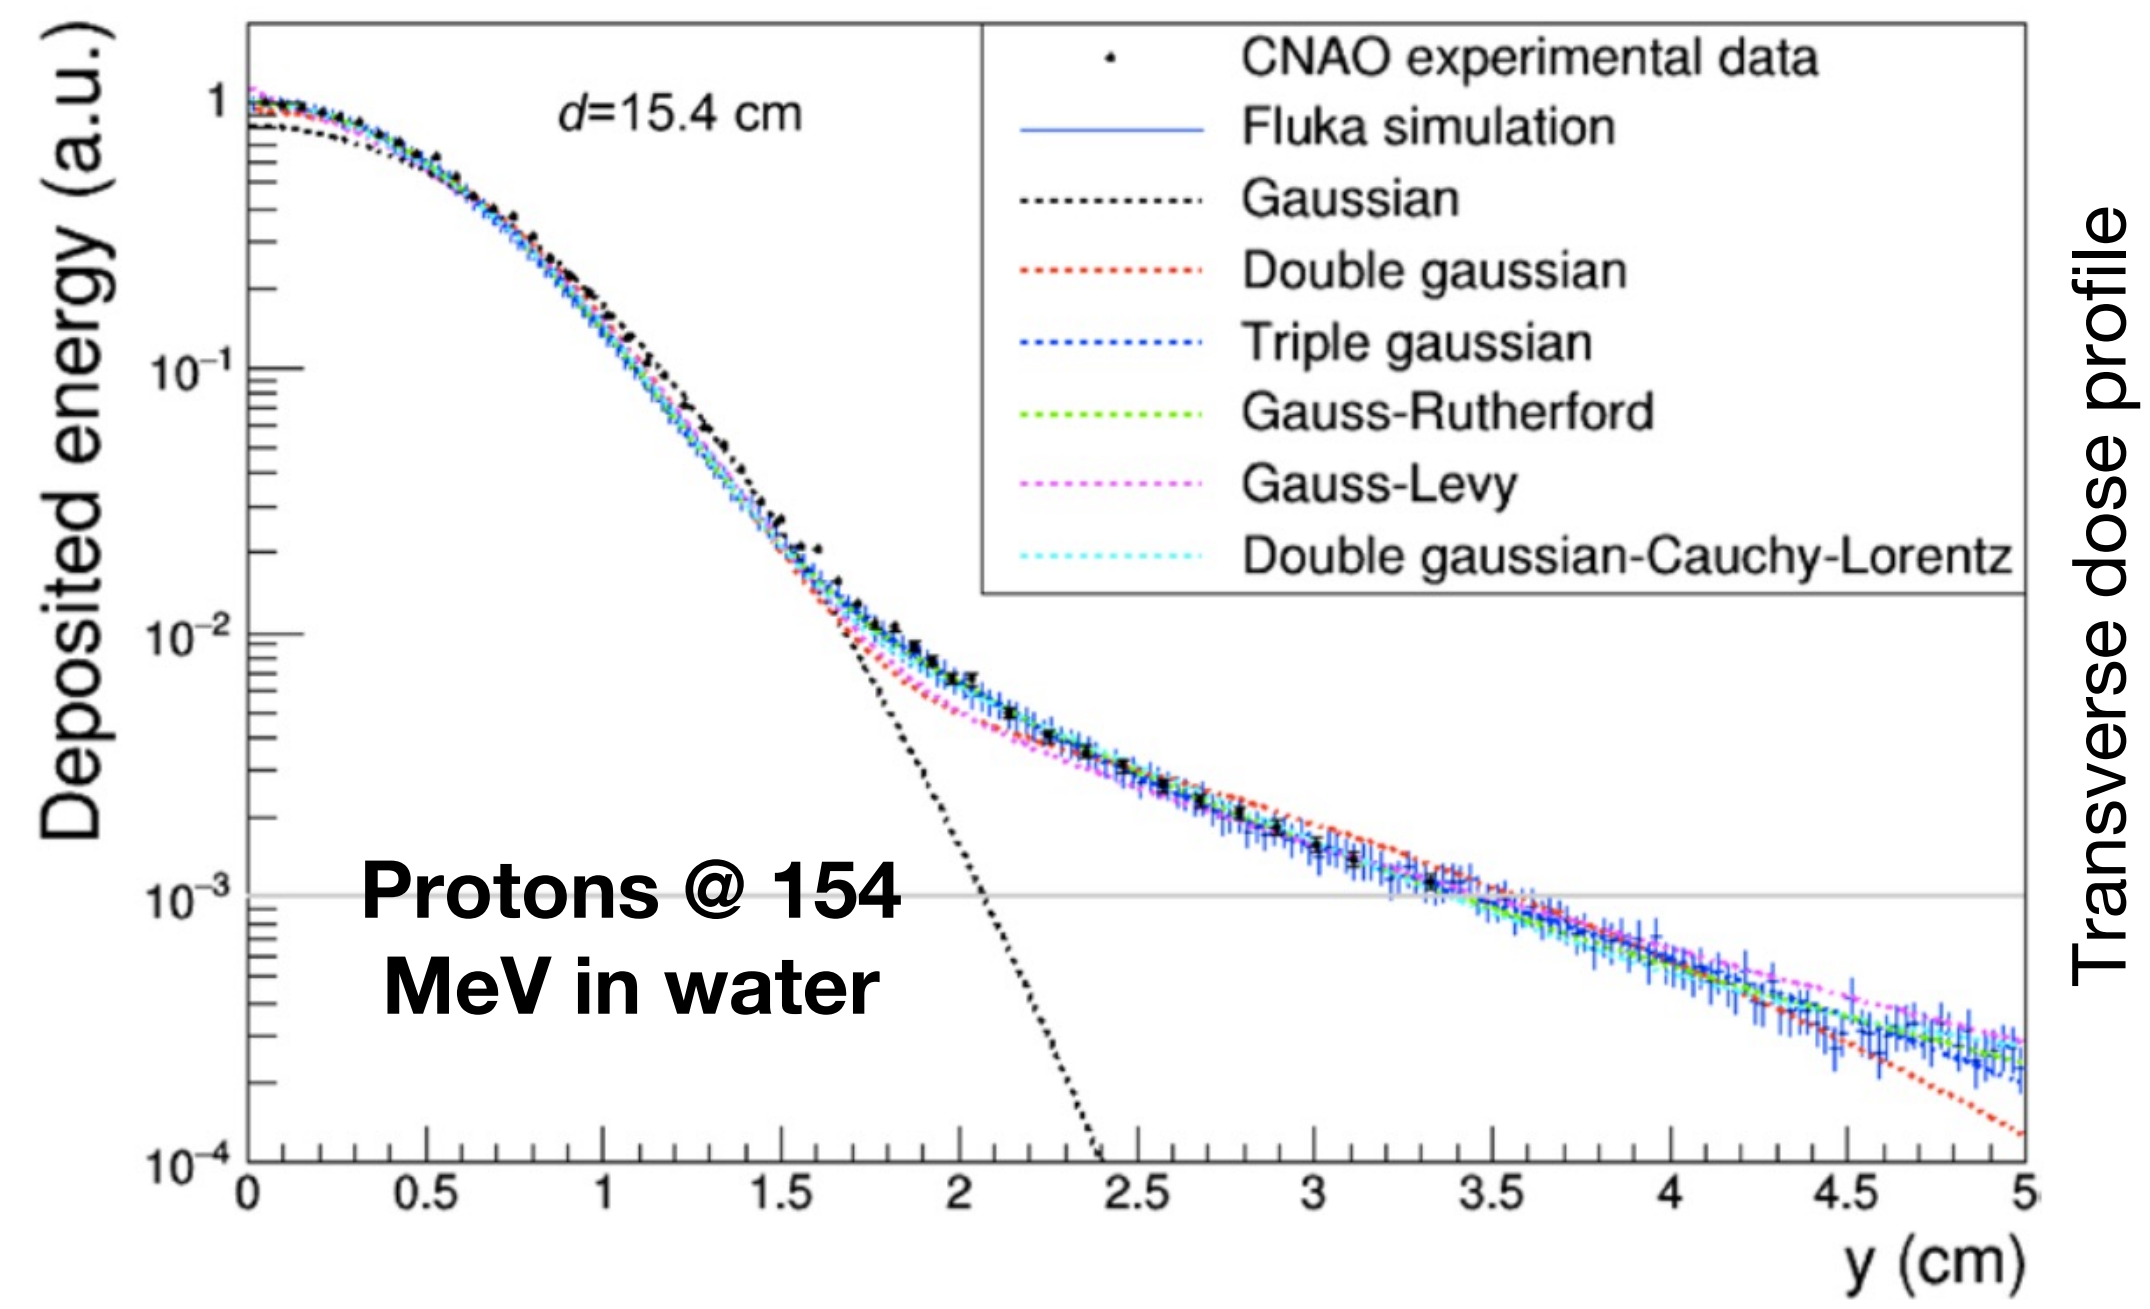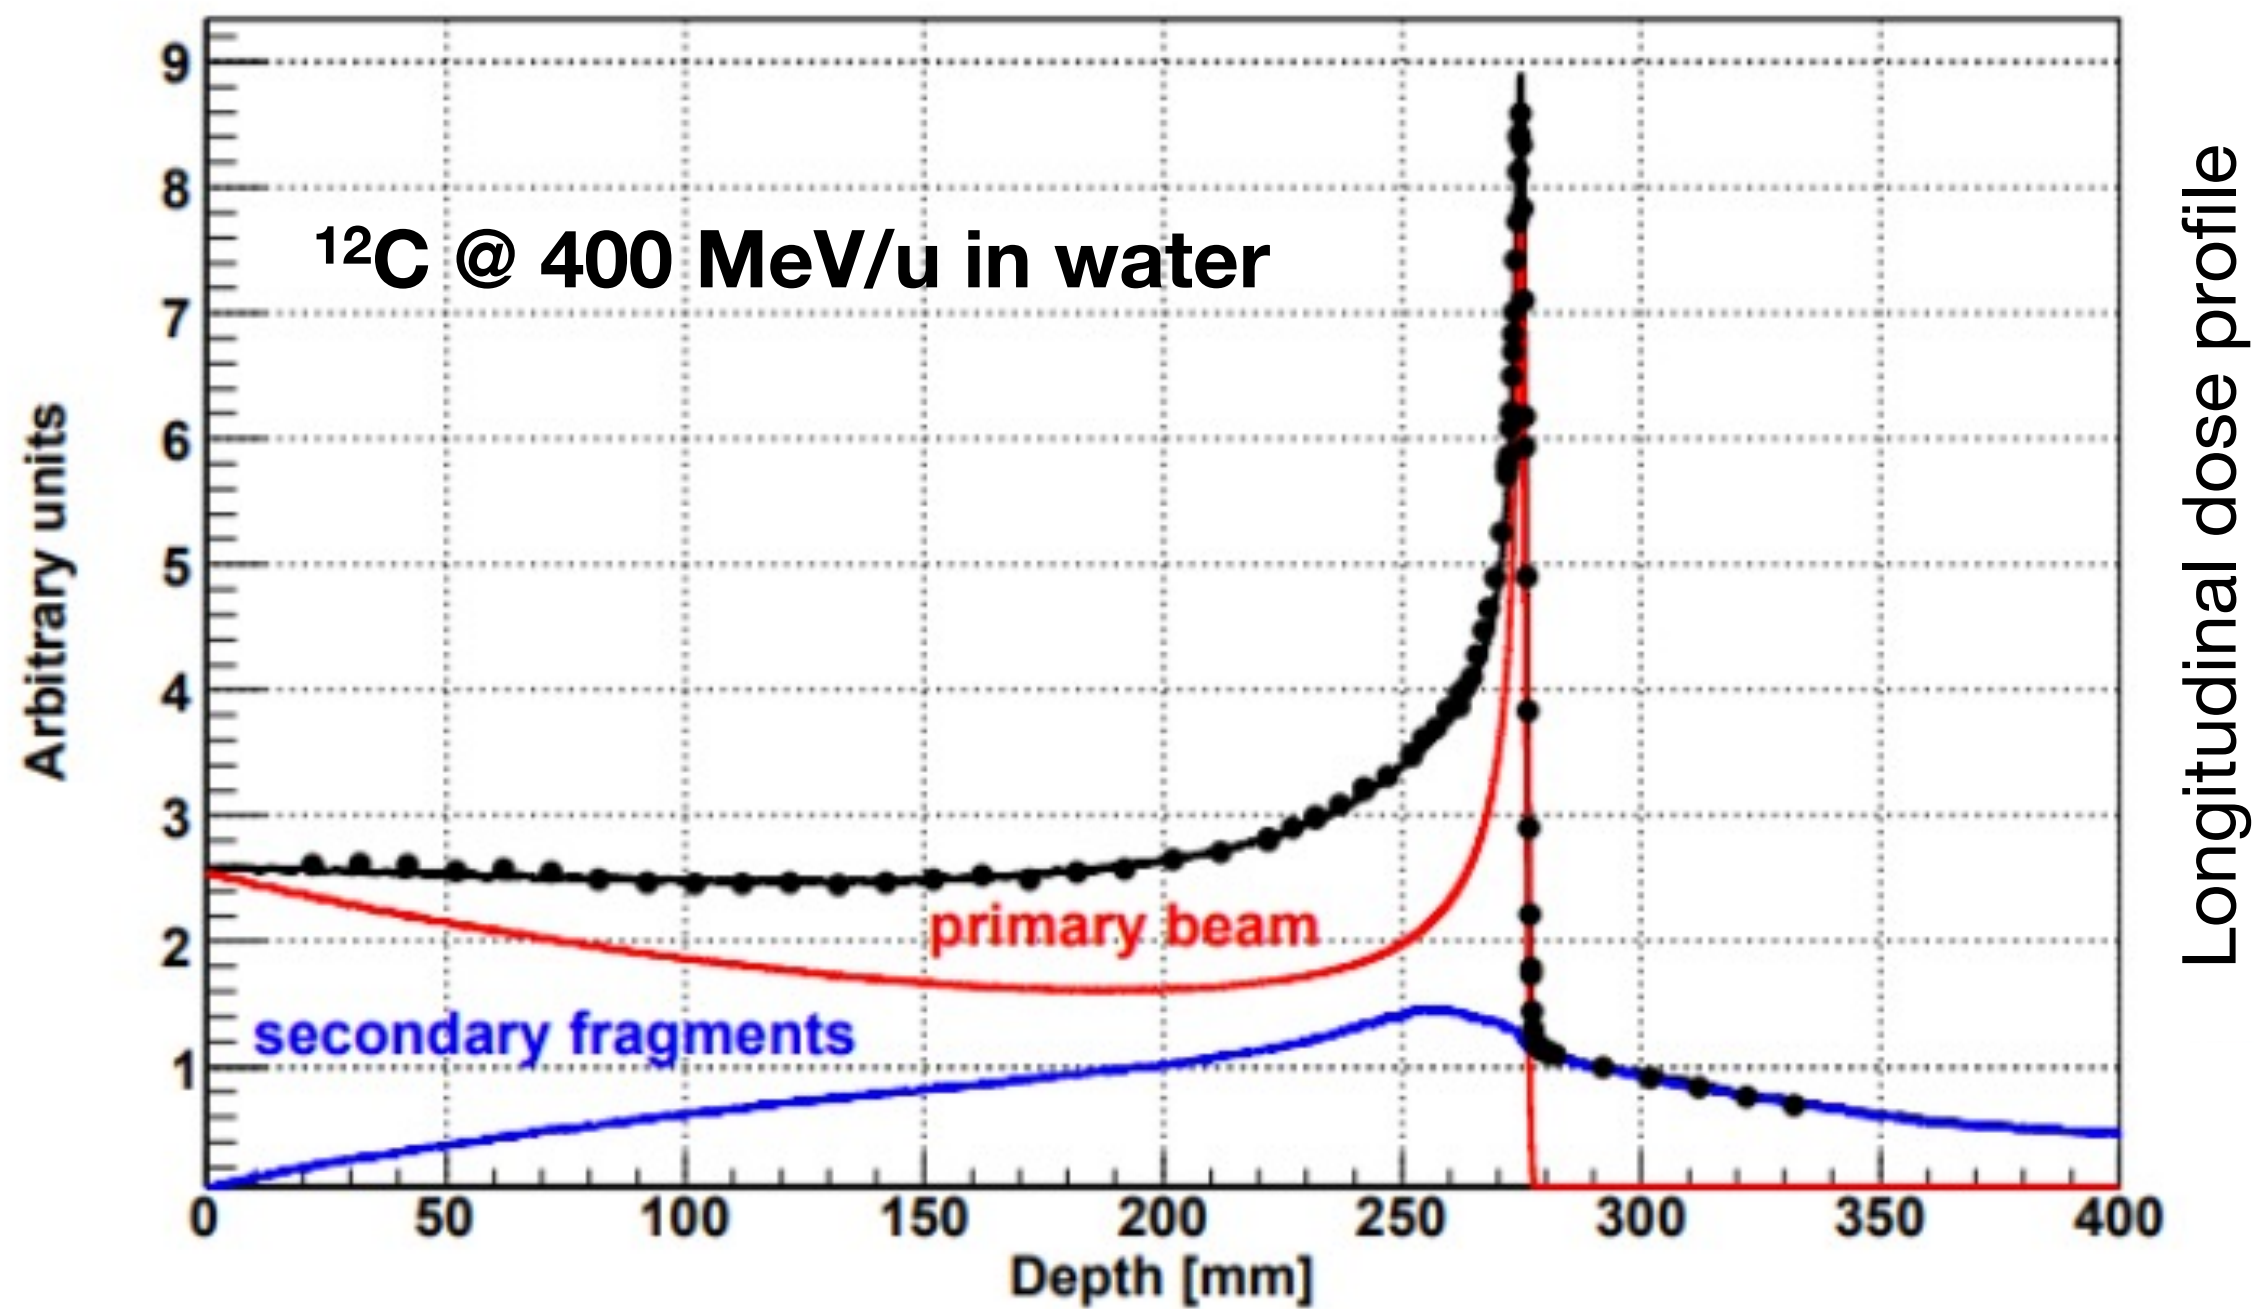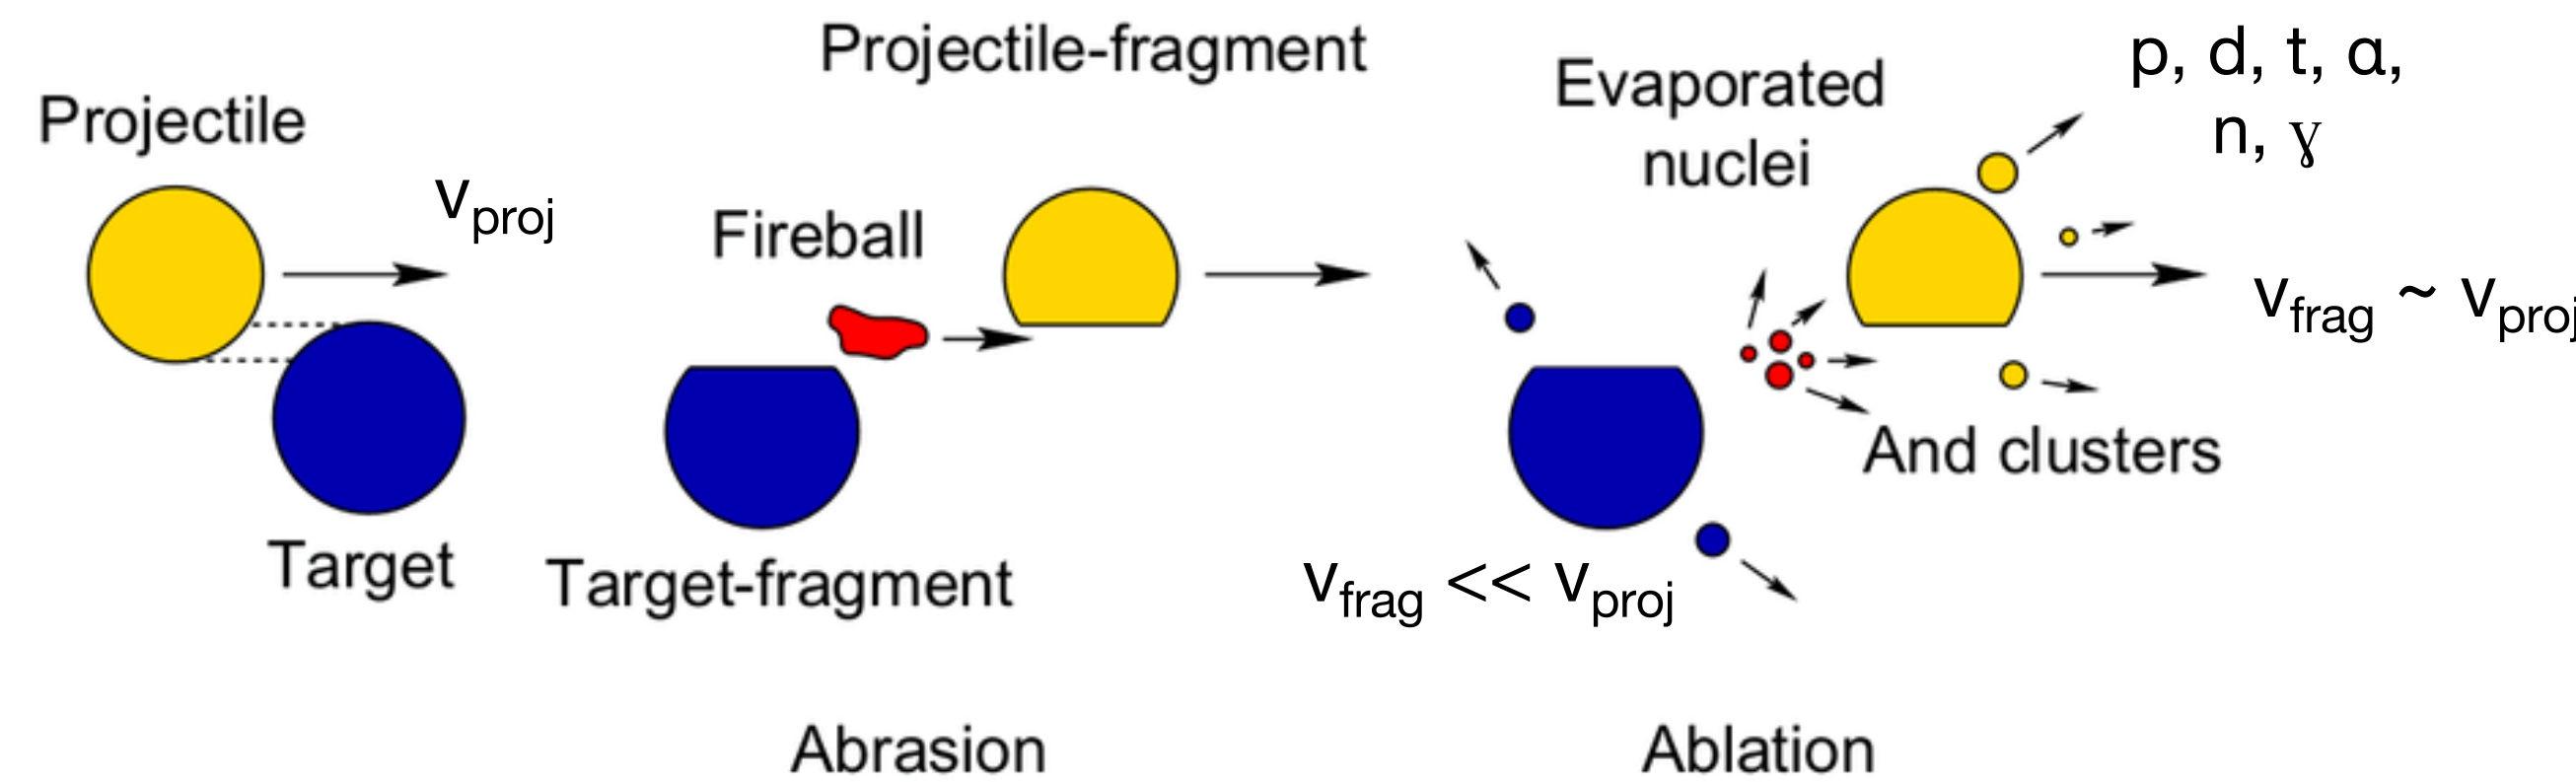

Fragmentation consequences

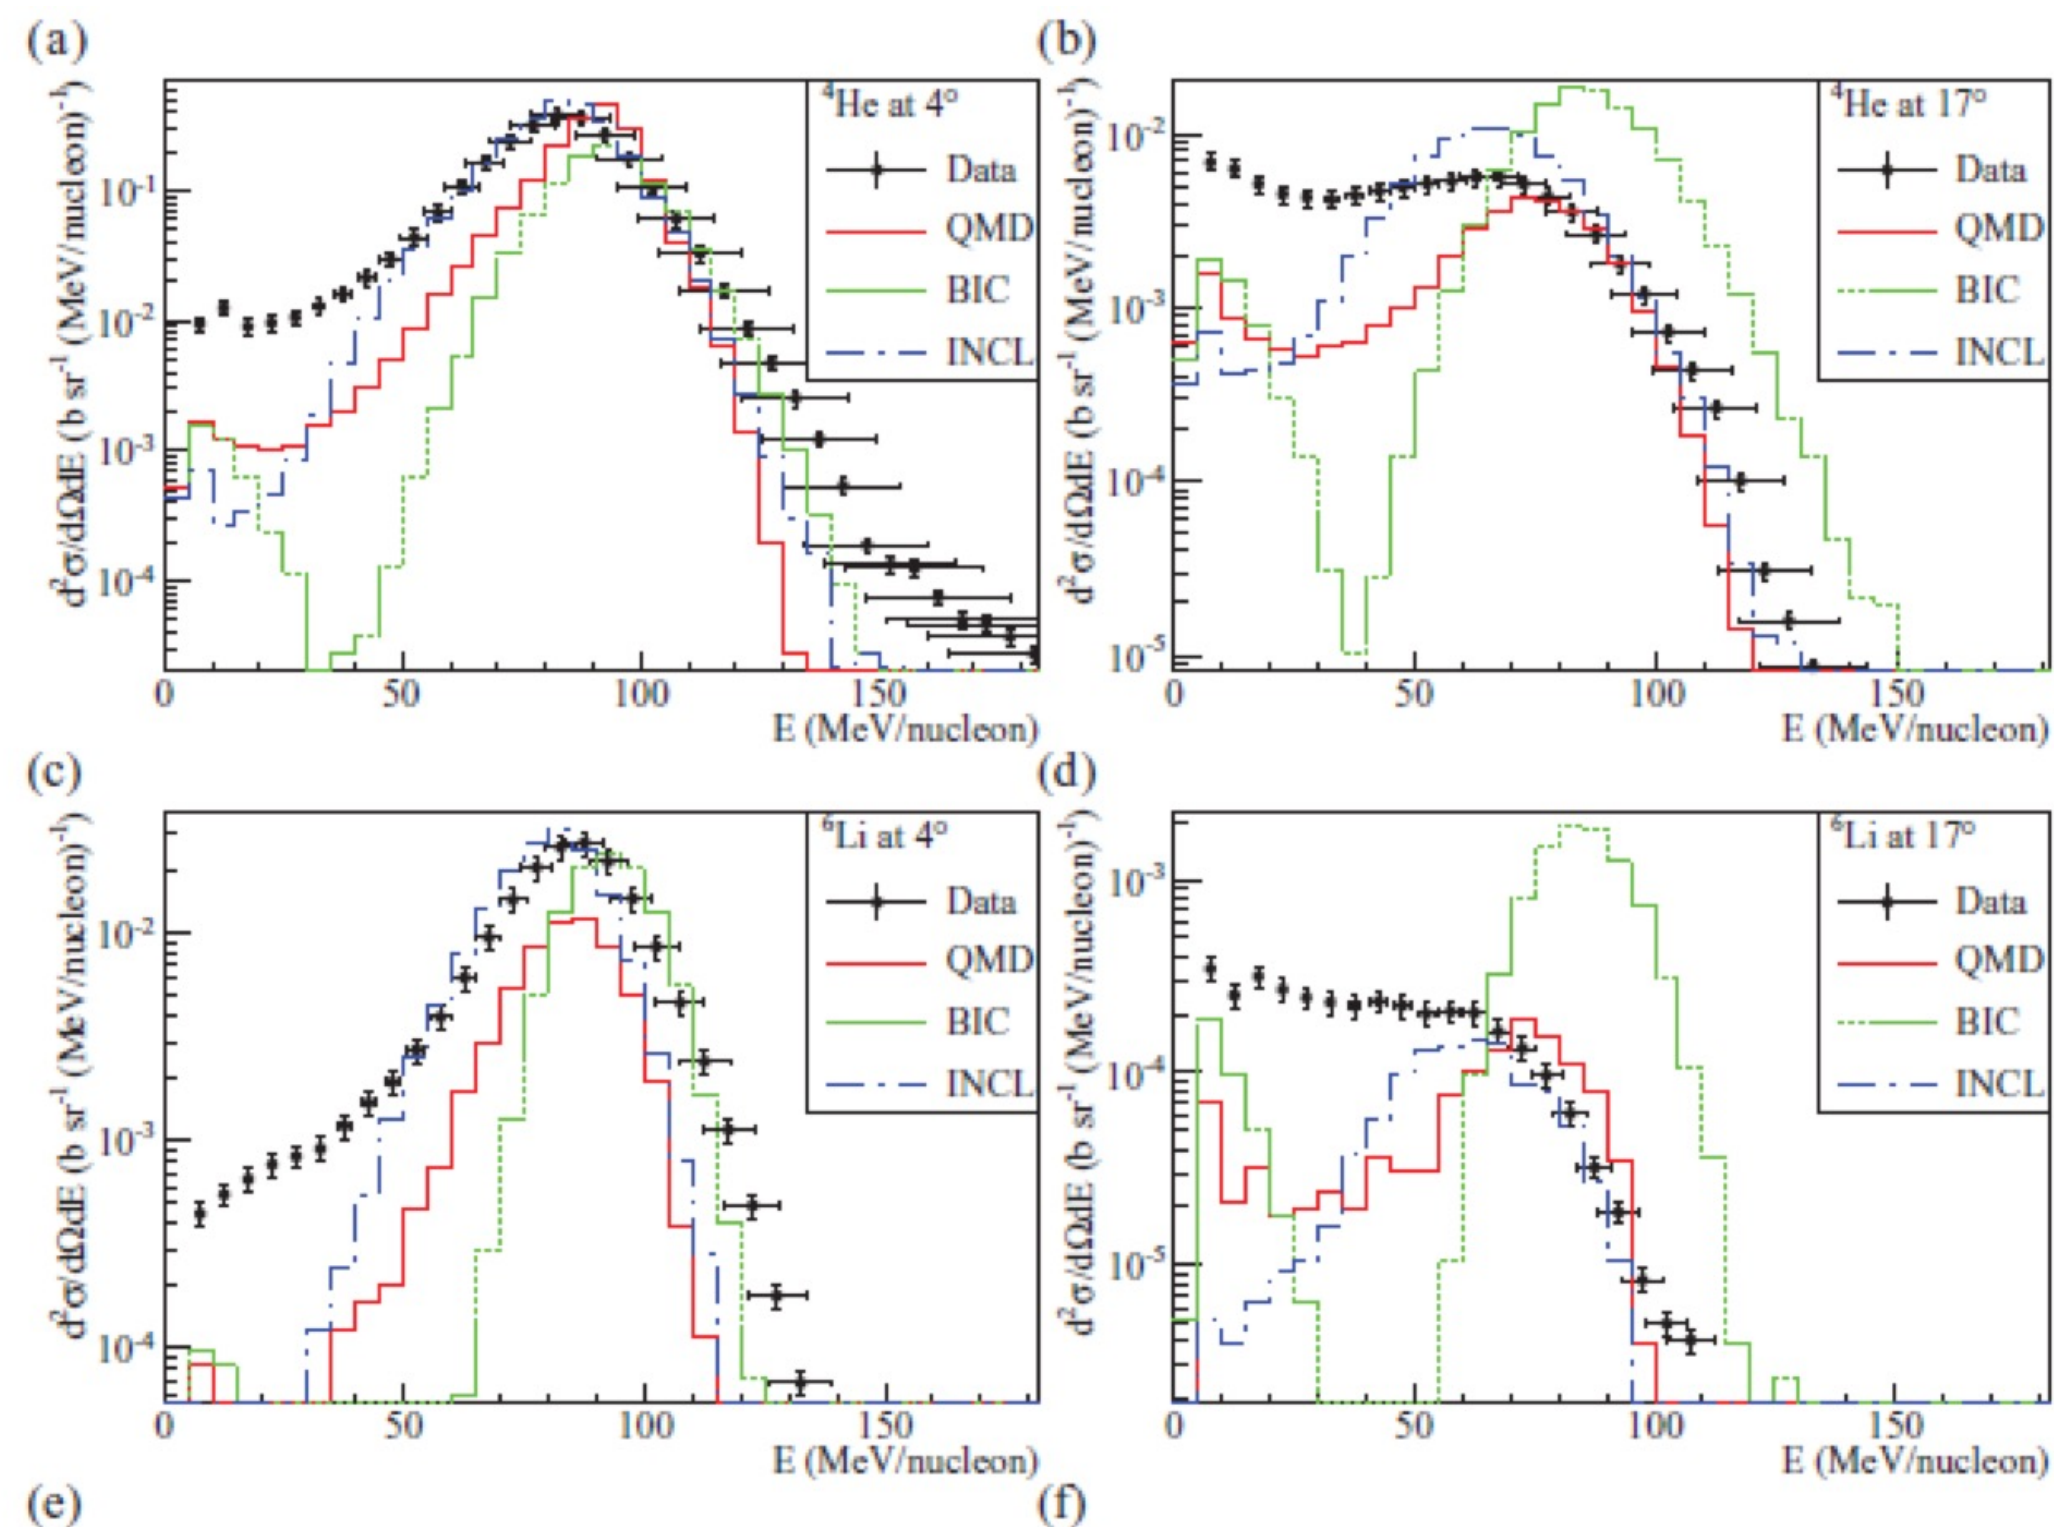

J. Dudouet et al., PHYSICAL REVIEW C **89**, 054616 (2014)


- Fragmentation processes modify the delivered dose map
- This effect strongly depends on the **mass** and the **energy** of the ion beam and on the **target** involved in the interaction

- **Treatment plans for PT are not yet able to include the fragmentation contribution with the accuracy (3%) required for radiotherapy**
- This is due to the lack of experimental data, and in particular of fragmentation cross section

Data acquisition at GSI



- Preliminary data taking @ GSI with a partial FOOT experimental set-up composed of Start Counter, Beam Monitor and ToF-Wall detector with a beam of ^{16}O at 400 MeV/u meant for calibration

Run	Type	Target	Events
2210	calibration	no	20463
2211	calibration	no	62782
2212	calibration	no	116349
2242	calibration	no	202728
2239	physics	C	20821
2240	physics	C	20004
2241	physics	C	20041
2251	physics	C	6863

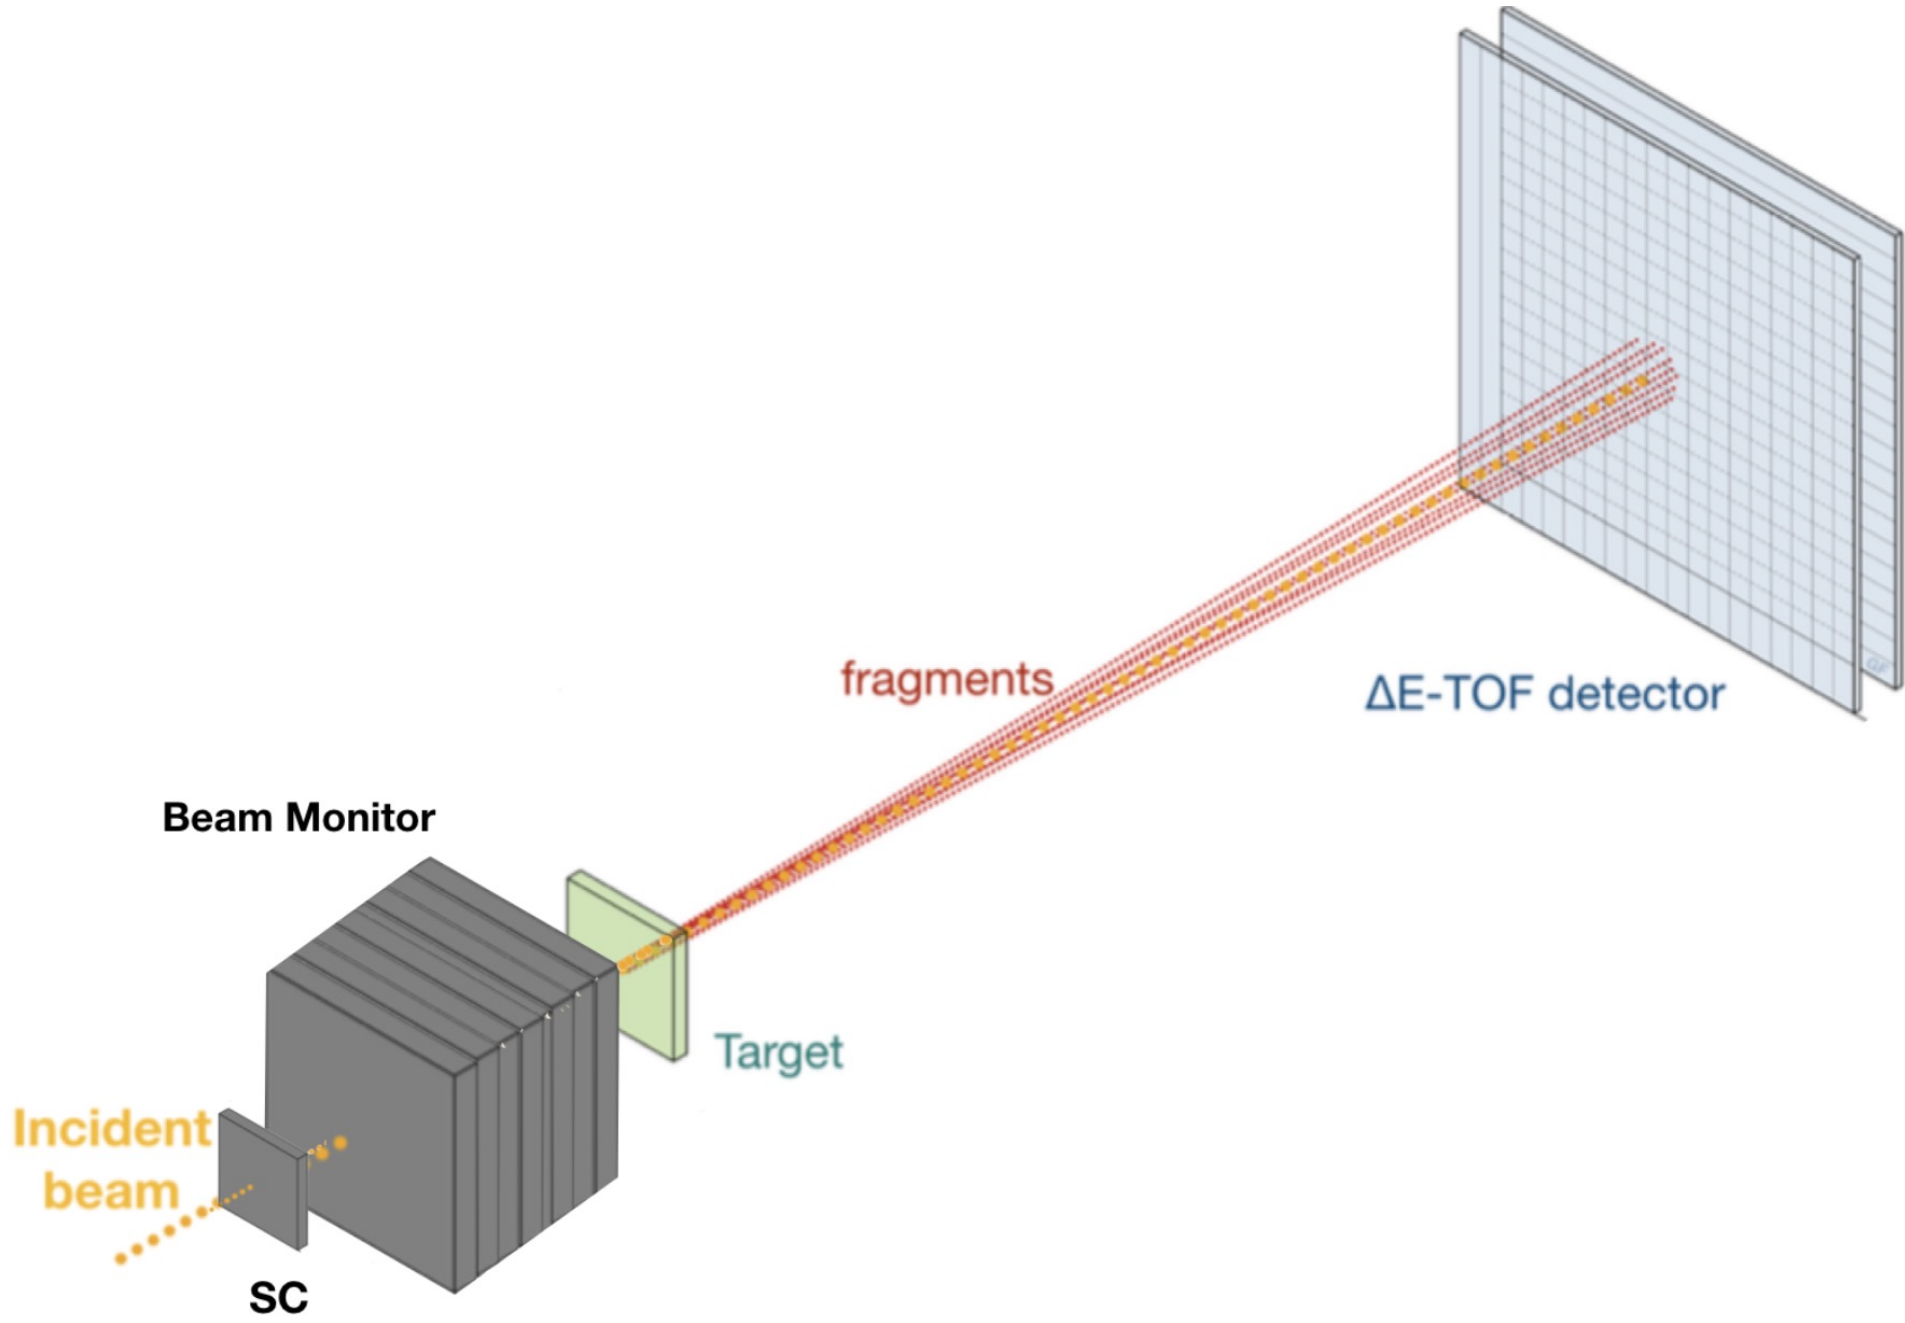

- Very few statistics (~67k events) collected for physics runs with fragmentation of the ^{16}O beam of 400 MeV/u on a C target
- Preliminary charge-changing cross sections integrated over the angular TW acceptance for the process ^{16}O (400 MeV/u)+C

Start Counter and Beam monitor

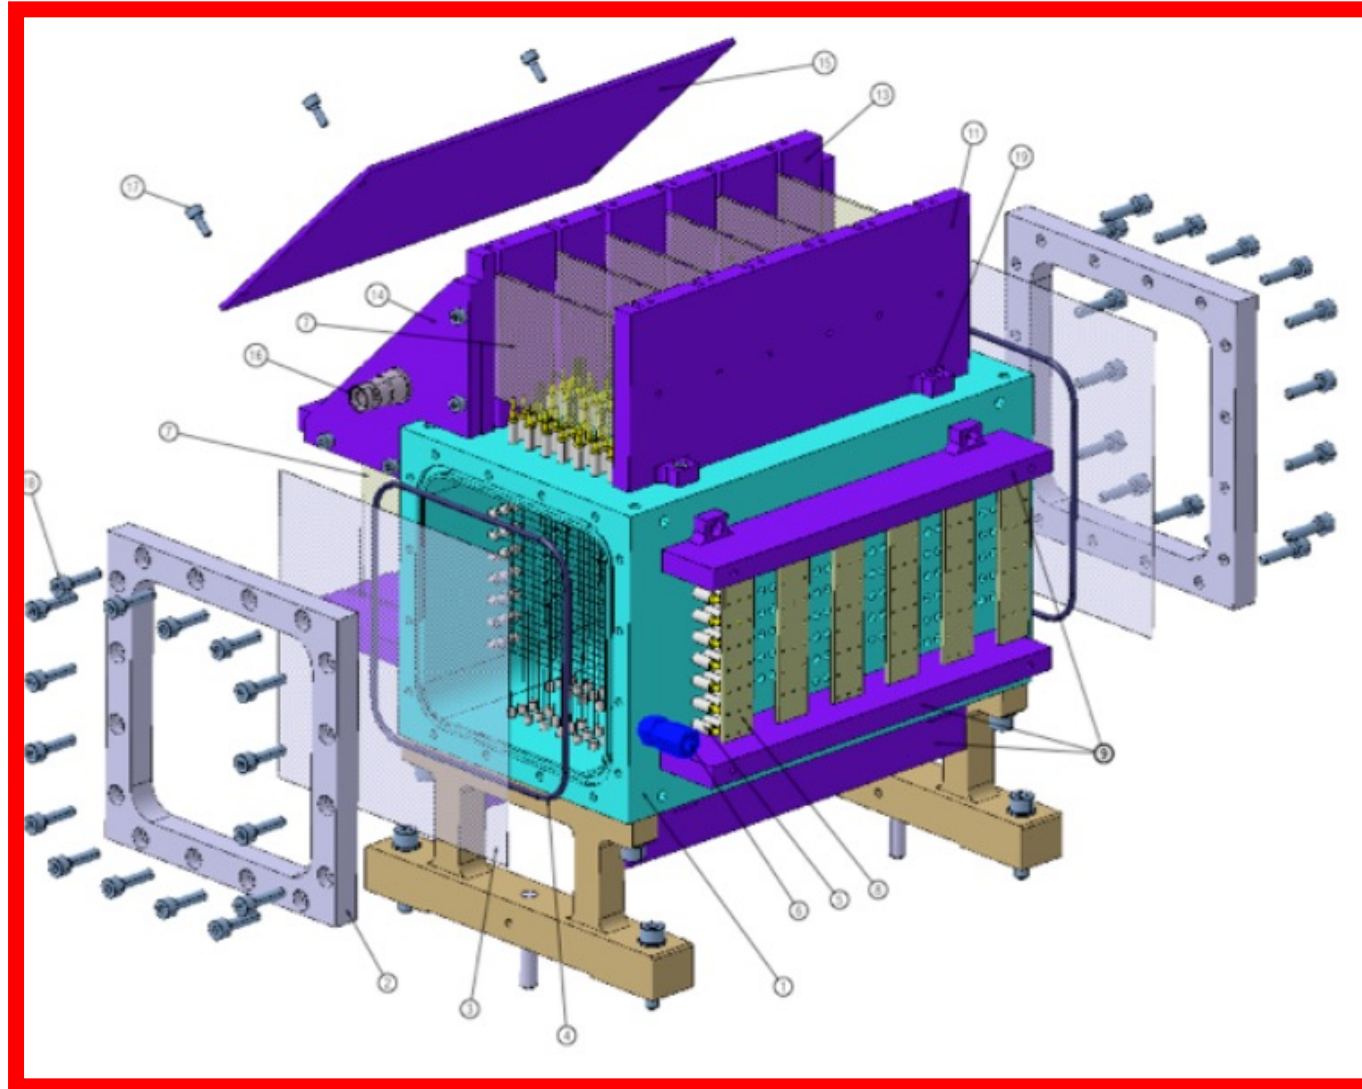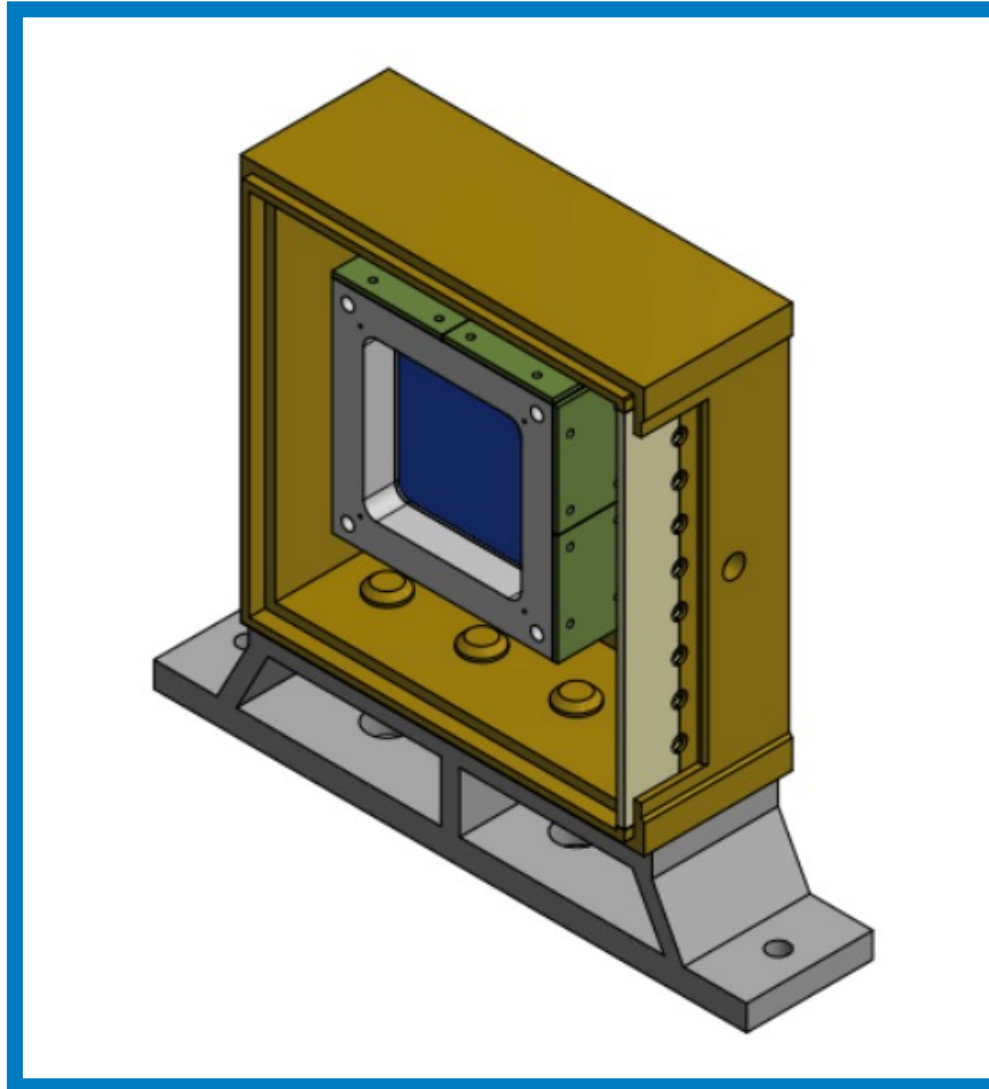

- The Beam Monitor (BM) is a drift chamber consisting of twelve wire layers, with three drift cells per layer
- Planes with wires oriented along the x and y axes are alternated allowing the beam profile reconstruction in both views
- The cell shape is rectangular (16 mm × 10 mm)
- The BM operates at ≈ 0.9 bar with a 80/20% gas mixture of Ar/CO₂


- The Start Counter (SC) is a **thin plastic scintillator layer** (EJ-228 – [250 μ m, 1mm] thick) placed about 30 cm before the target with an active surface of $5 \times 5 \text{ cm}^2$
- Coupled to **48 SiPM** (8 channel readout)
- Layout optimized to **maximize the light collection**, minimizing the out of target fragmentation probability

It provides:

1. The **start of the TOF** measurements
2. The **trigger signal**
3. The measurement of the incoming **ion flux**

- The BM detector will be placed between the SC and the target and will be used to measure the direction and impinging point of the beam ions on the target


Tof-Wall detector: charge ID of the fragments

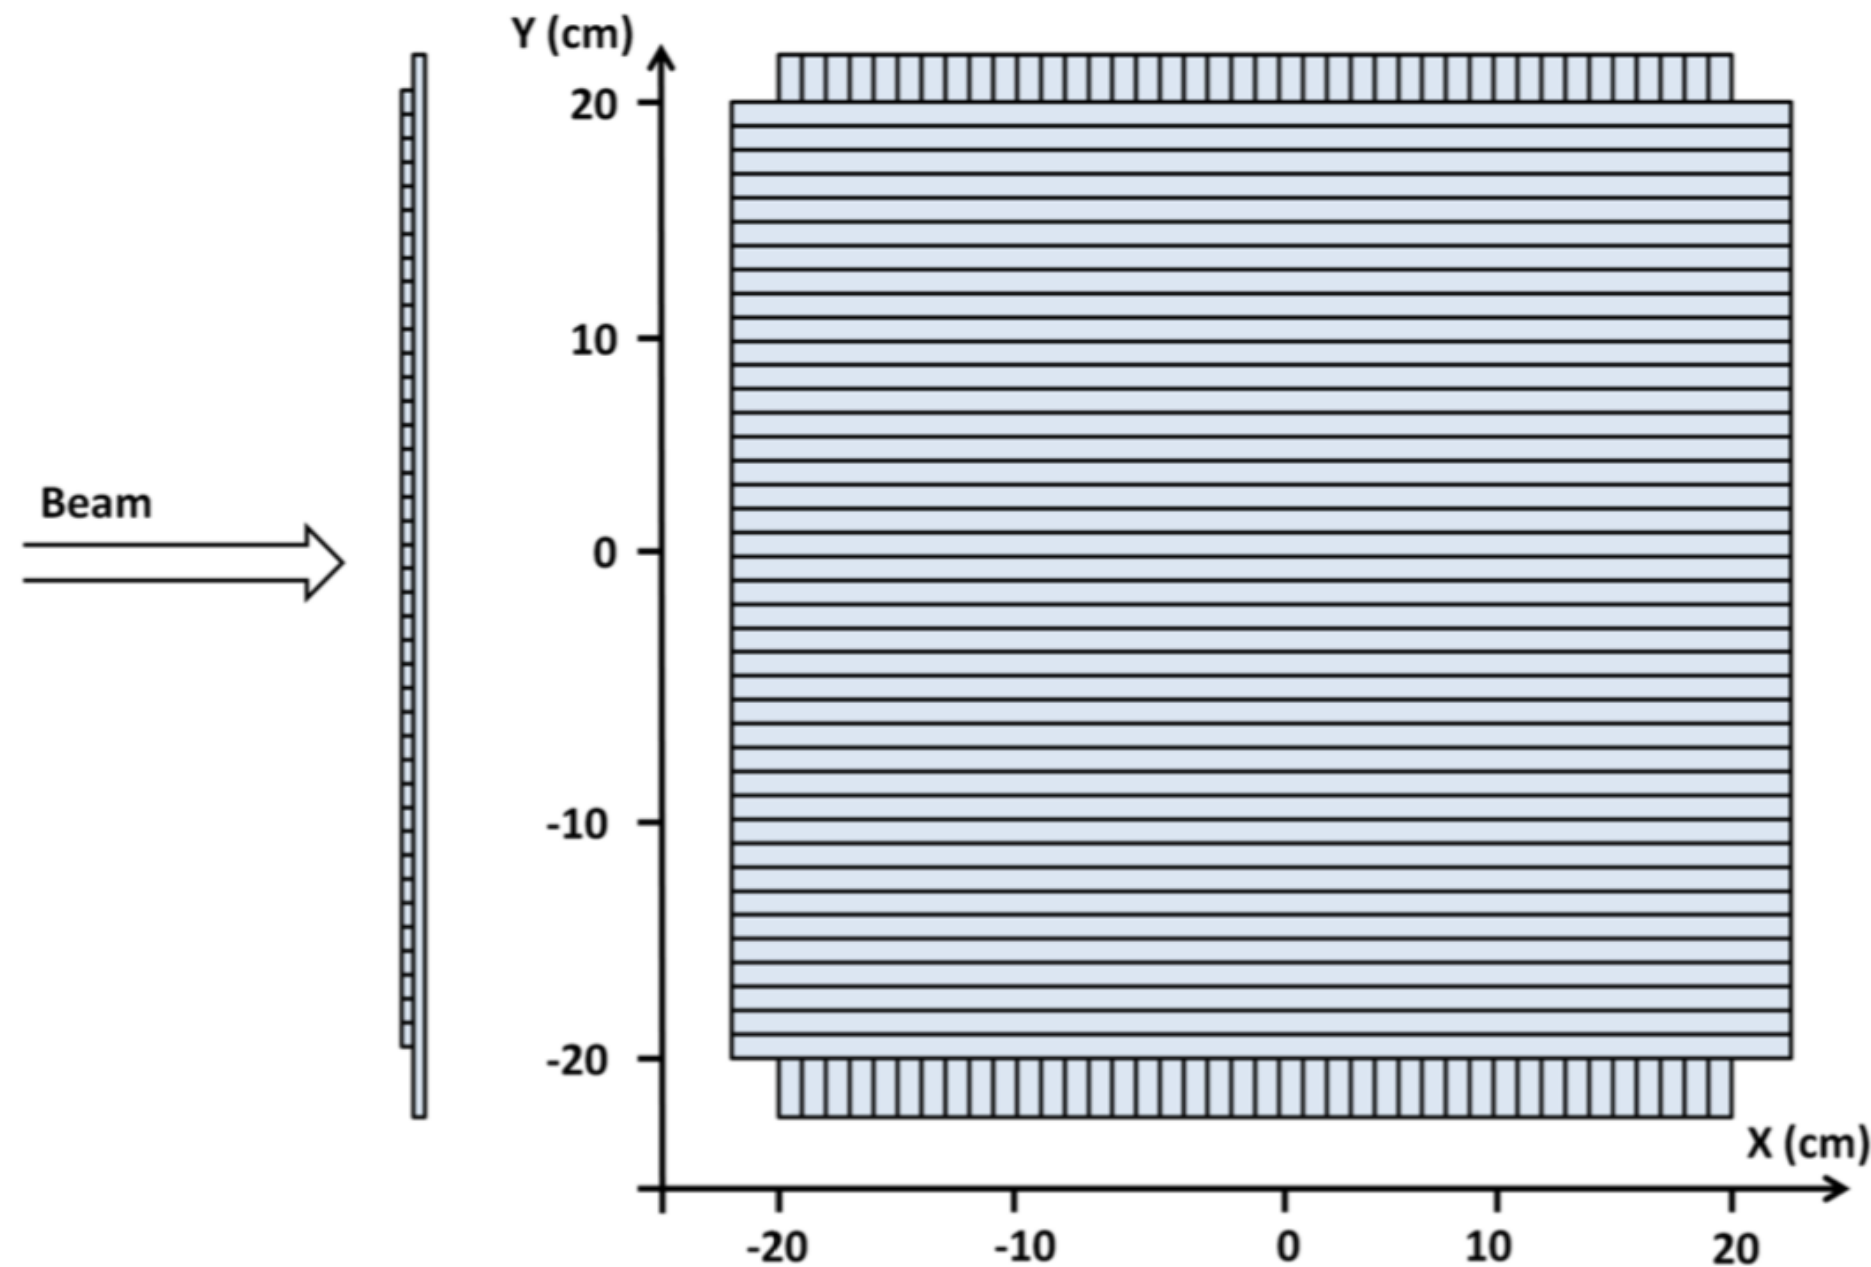

- The **Tof-Wall** detector (TW) is composed of **two layers of 20 scintillator bars** (0.3 cm thick, 2 cm wide, 44 cm long) arranged orthogonally with a $40 \times 40 \text{ cm}^2$ active area
- Each of two edges of the TW bars is coupled to **4 SiPM** with a $3 \times 3 \text{ cm}^2$ active area and 25 μm microcell pitch.

TW provides:

1. Deposited energy ΔE
2. Time of flight **TOF** (using the t_0 provides by ST)
3. Hit **positions**

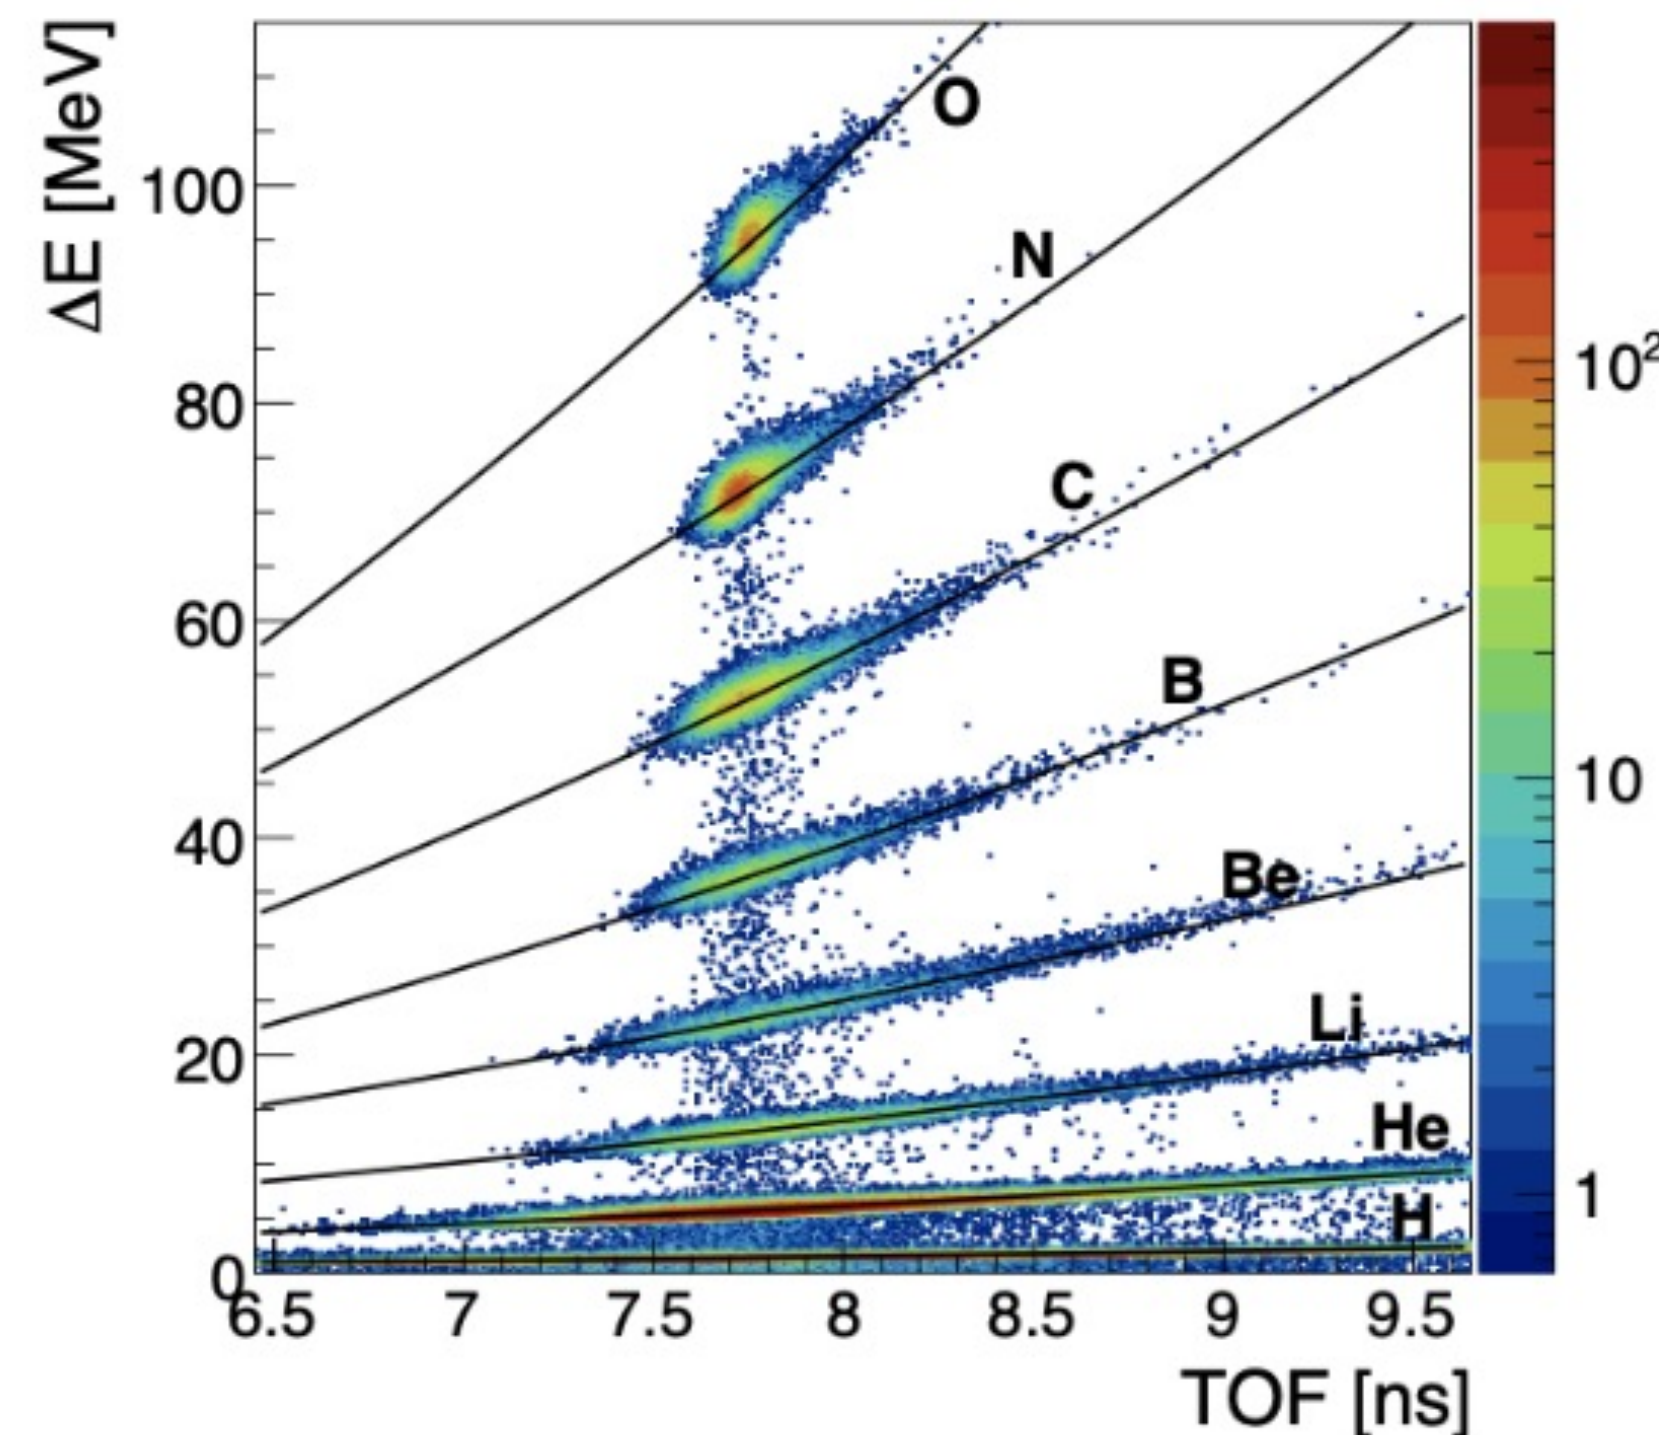

Fragment charge Z identification performed using a Bethe-Bloch parametrization as a function of TOF for each Z

Cross section measurement strategy

^{16}O beam @ 400 MeV/nucleon on a 5 mm Carbon TG

$$\sigma(Z) = \int_{E_{min}}^{E_{max}} \int_0^{\Delta\theta} \left(\frac{\partial^2 \sigma}{\partial \theta \partial E_{kin}} \right) d\theta dE_{kin} = \frac{N_{frag}(Z)}{N_{prim} \cdot N_{TG} \cdot \epsilon(Z)}$$

$$N_{TG} = \frac{\rho \cdot dx \cdot N_A}{A}$$

$$\begin{cases} \rho = 1.83 \text{ g/cm}^3 \\ dx = 0.5 \text{ cm} \\ A = 12.0107 \end{cases}$$

Run	Type	Target	Events
2210	calibration	no	20463
2211	calibration	no	62782
2212	calibration	no	116349
2242	calibration	no	202728
2239	physics	C	20821
2240	physics	C	20004
2241	physics	C	20041
2251	physics	C	6863

1. **Align FOOT detector** at GSI and select angular acceptance for cross section integration;
2. Compute **MC efficiencies** for each fragment;
3. Estimate **fragmentation out of target** for background subtraction;
4. Extract the **fragments yields** from Z identification TW algorithms;
5. **Systematics** study.

Very low statistics and no detectors for mass identification → cross section integrated in angular and kinetic energy interval is feasible

MC studies: efficiencies and background rejection



Developed a detailed FLUKA simulation with the geometry of the set-up used at GSI data taking

$$\epsilon(Z) = \frac{N(Z)_{TW}}{N(Z)_{prod}}$$

Numerator: asking for a reconstructed and Z identified fragment with TW matched to primary fragments with origin in target with production angle < 5.7° and E_{kin} production in the range [100, 800] MeV/u



Denominator: asking for primary fragments produced in target with an angle < 5.7° and E_{kin} production in the range [100, 800] MeV/u

Element	Efficiency(%)
He	91.92 ± 0.05
Li	85.38 ± 0.20
Be	88.32 ± 0.26
B	88.75 ± 0.24
C	91.13 ± 0.15
N	95.88 ± 0.09

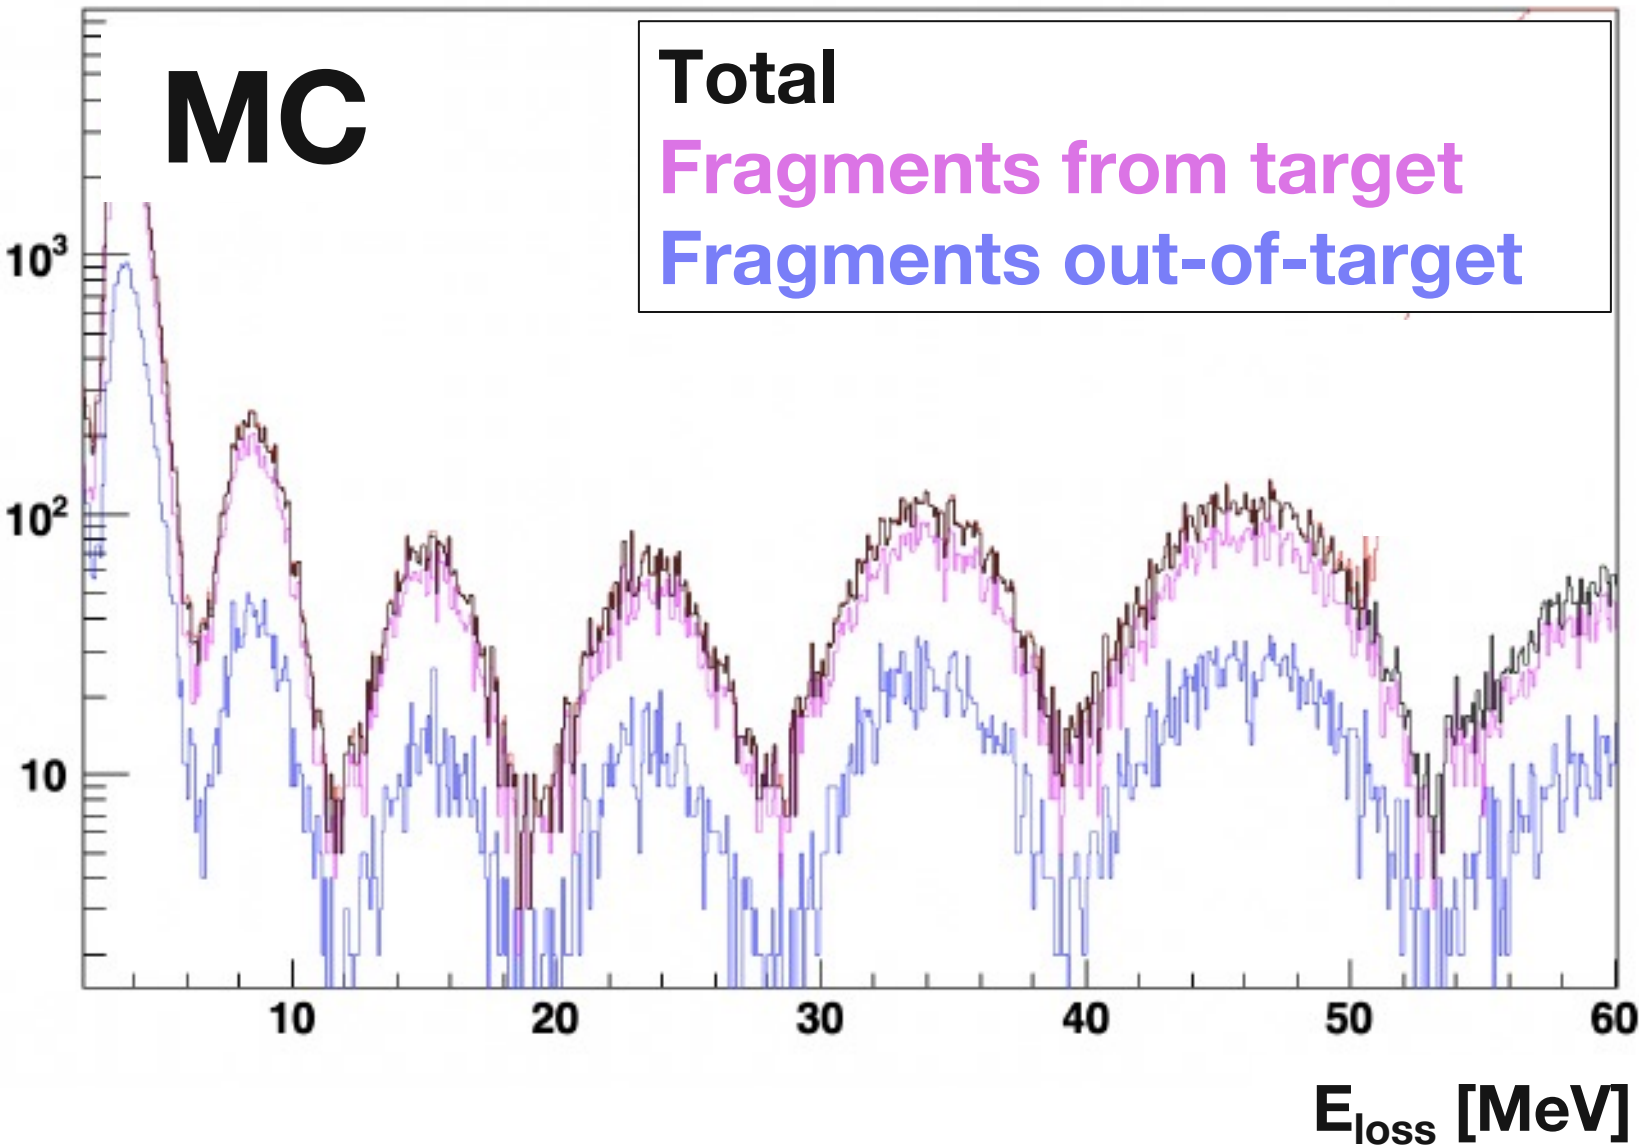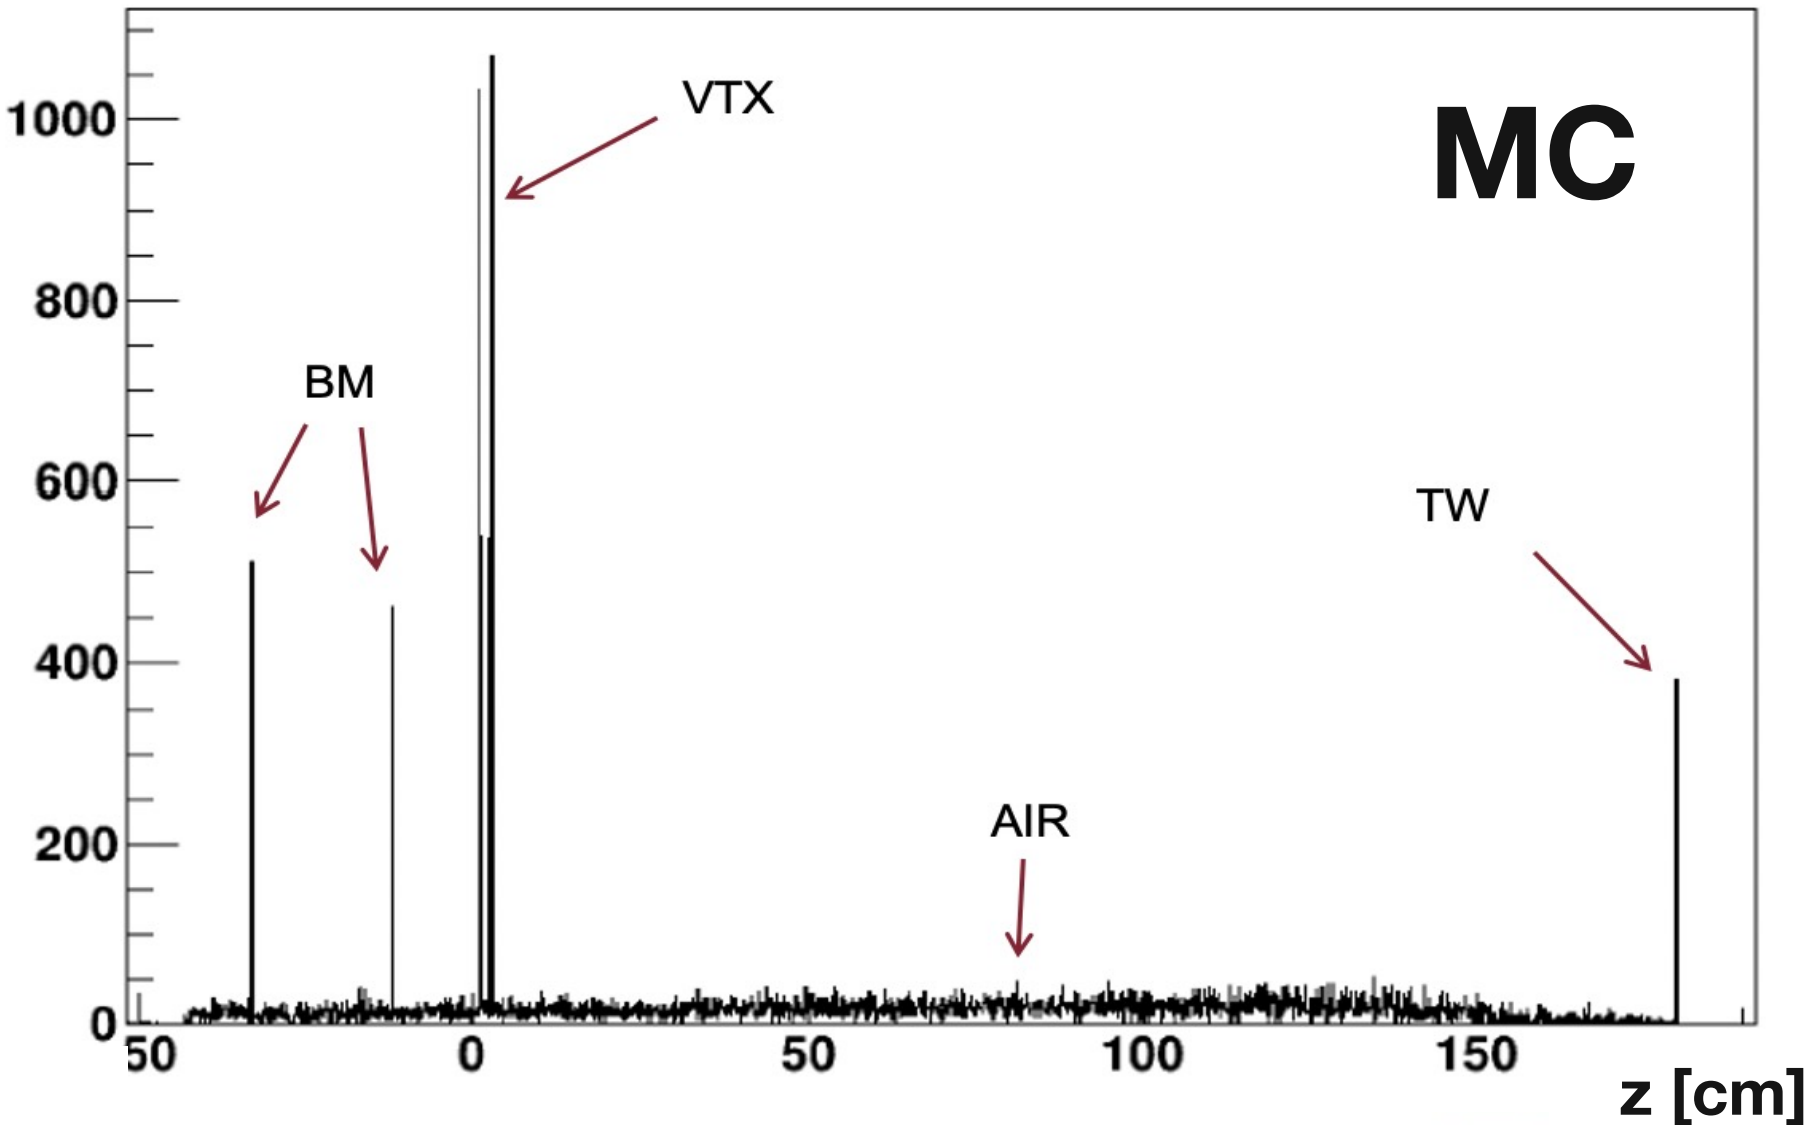

Out of target primary fragmentation is a not negligible background to be subtracted (~30% of the signal from MC studies). Most of it coming from air

Data: fragment yields and background subtraction

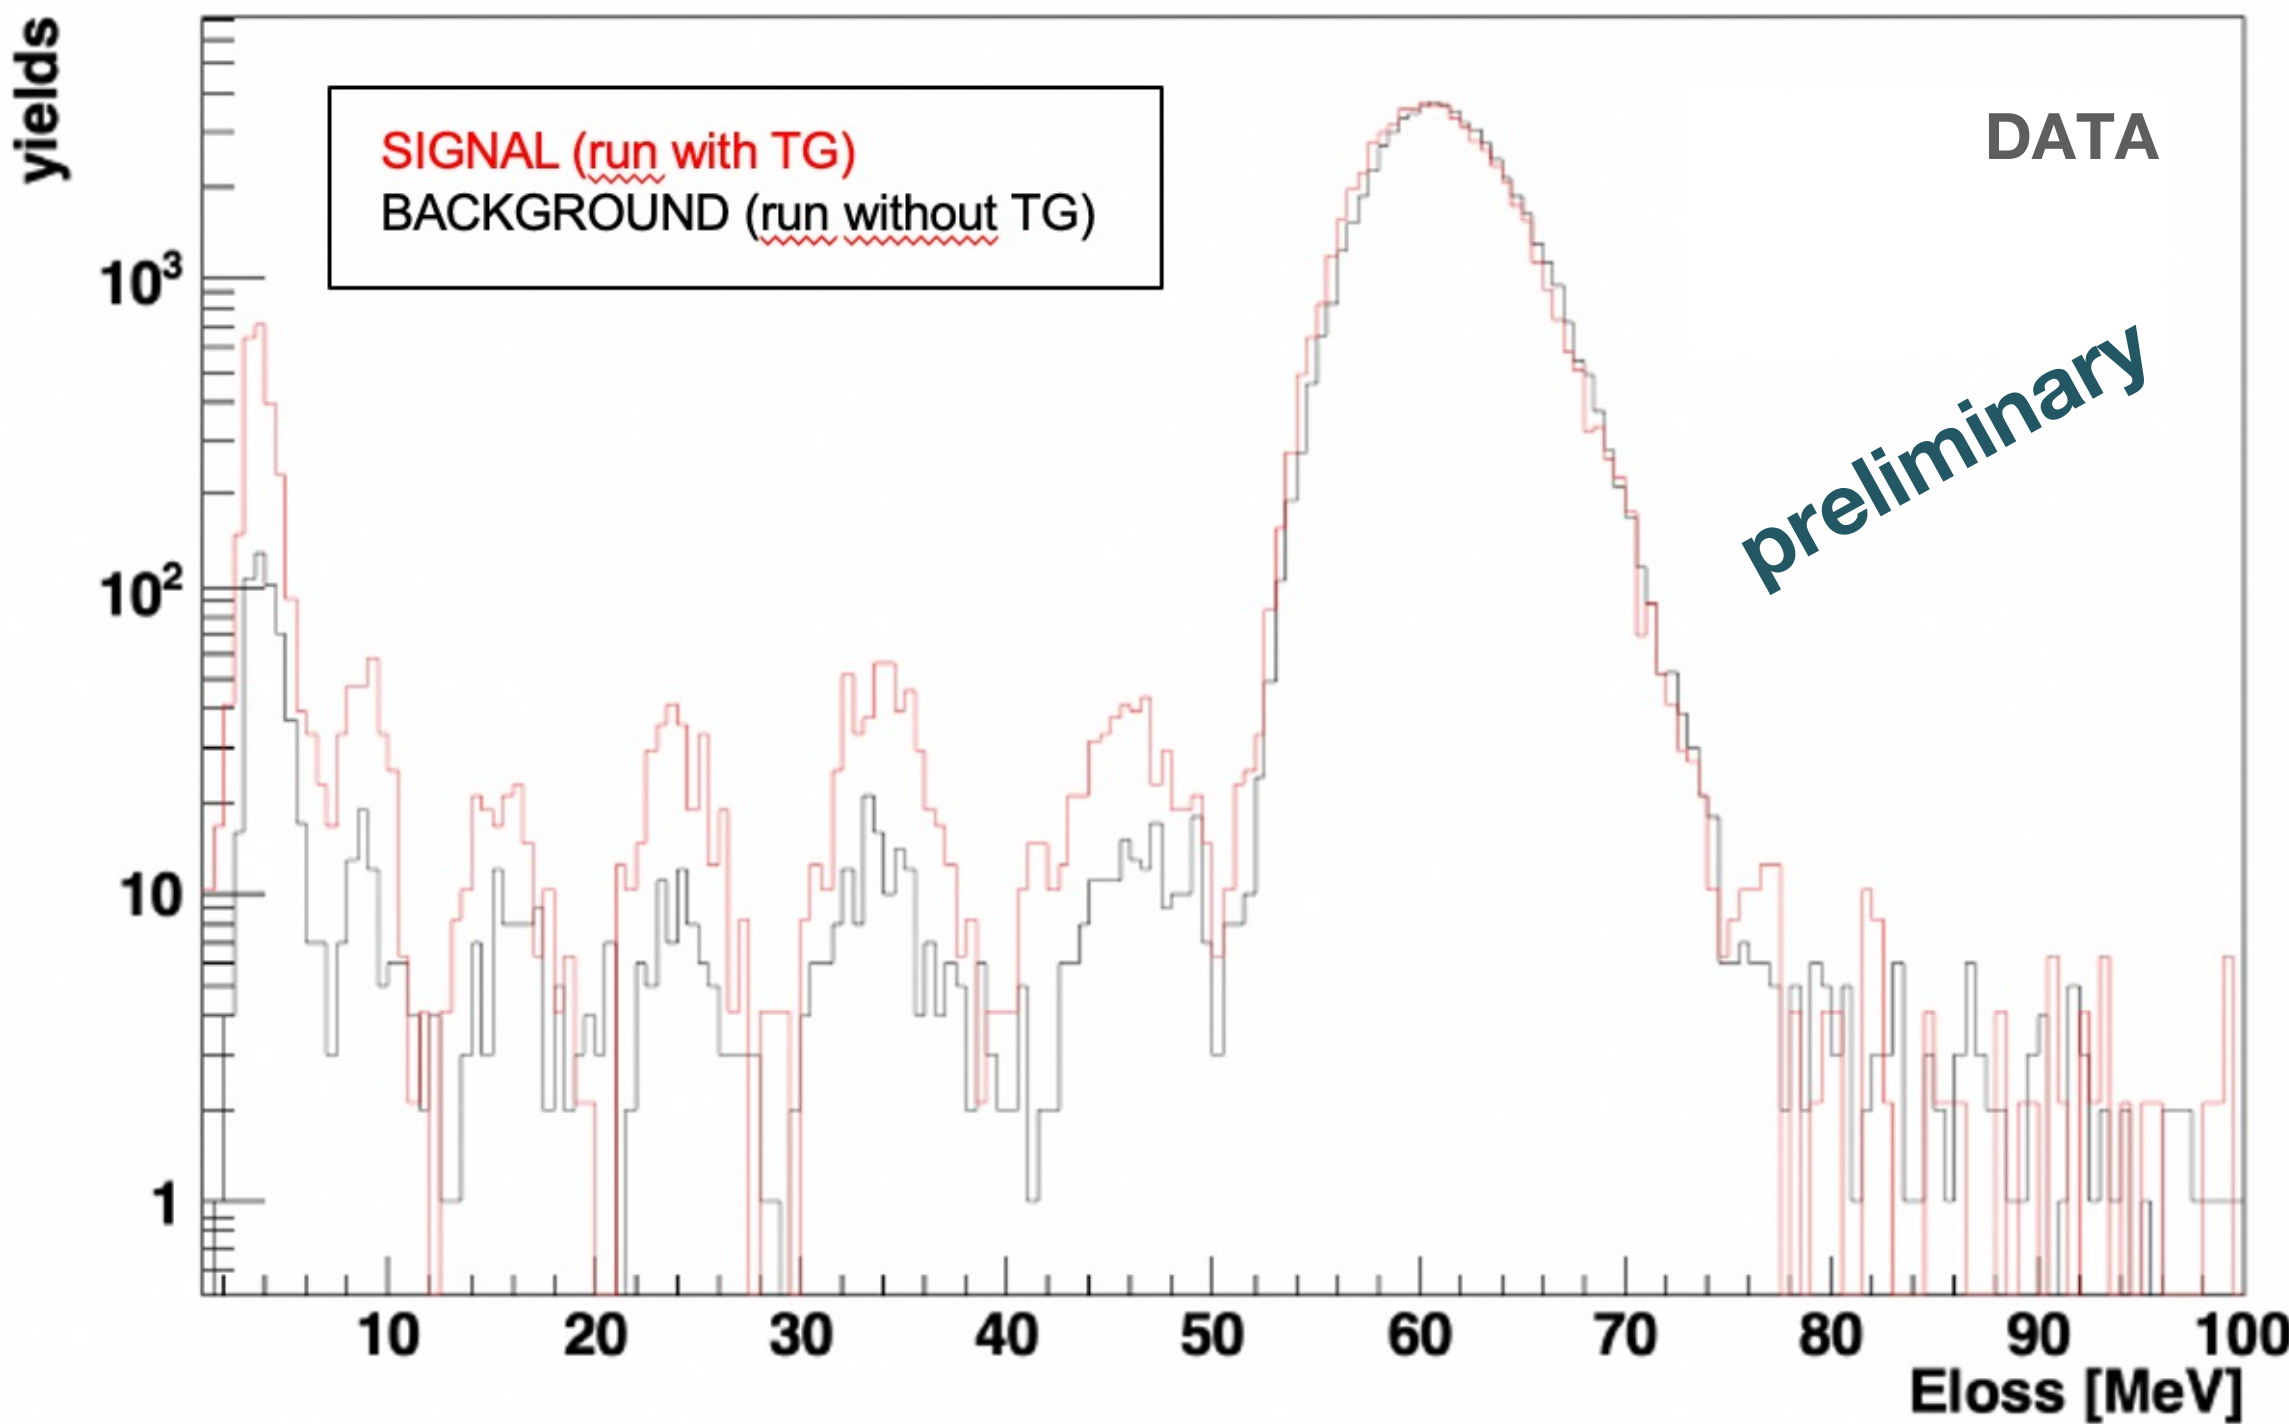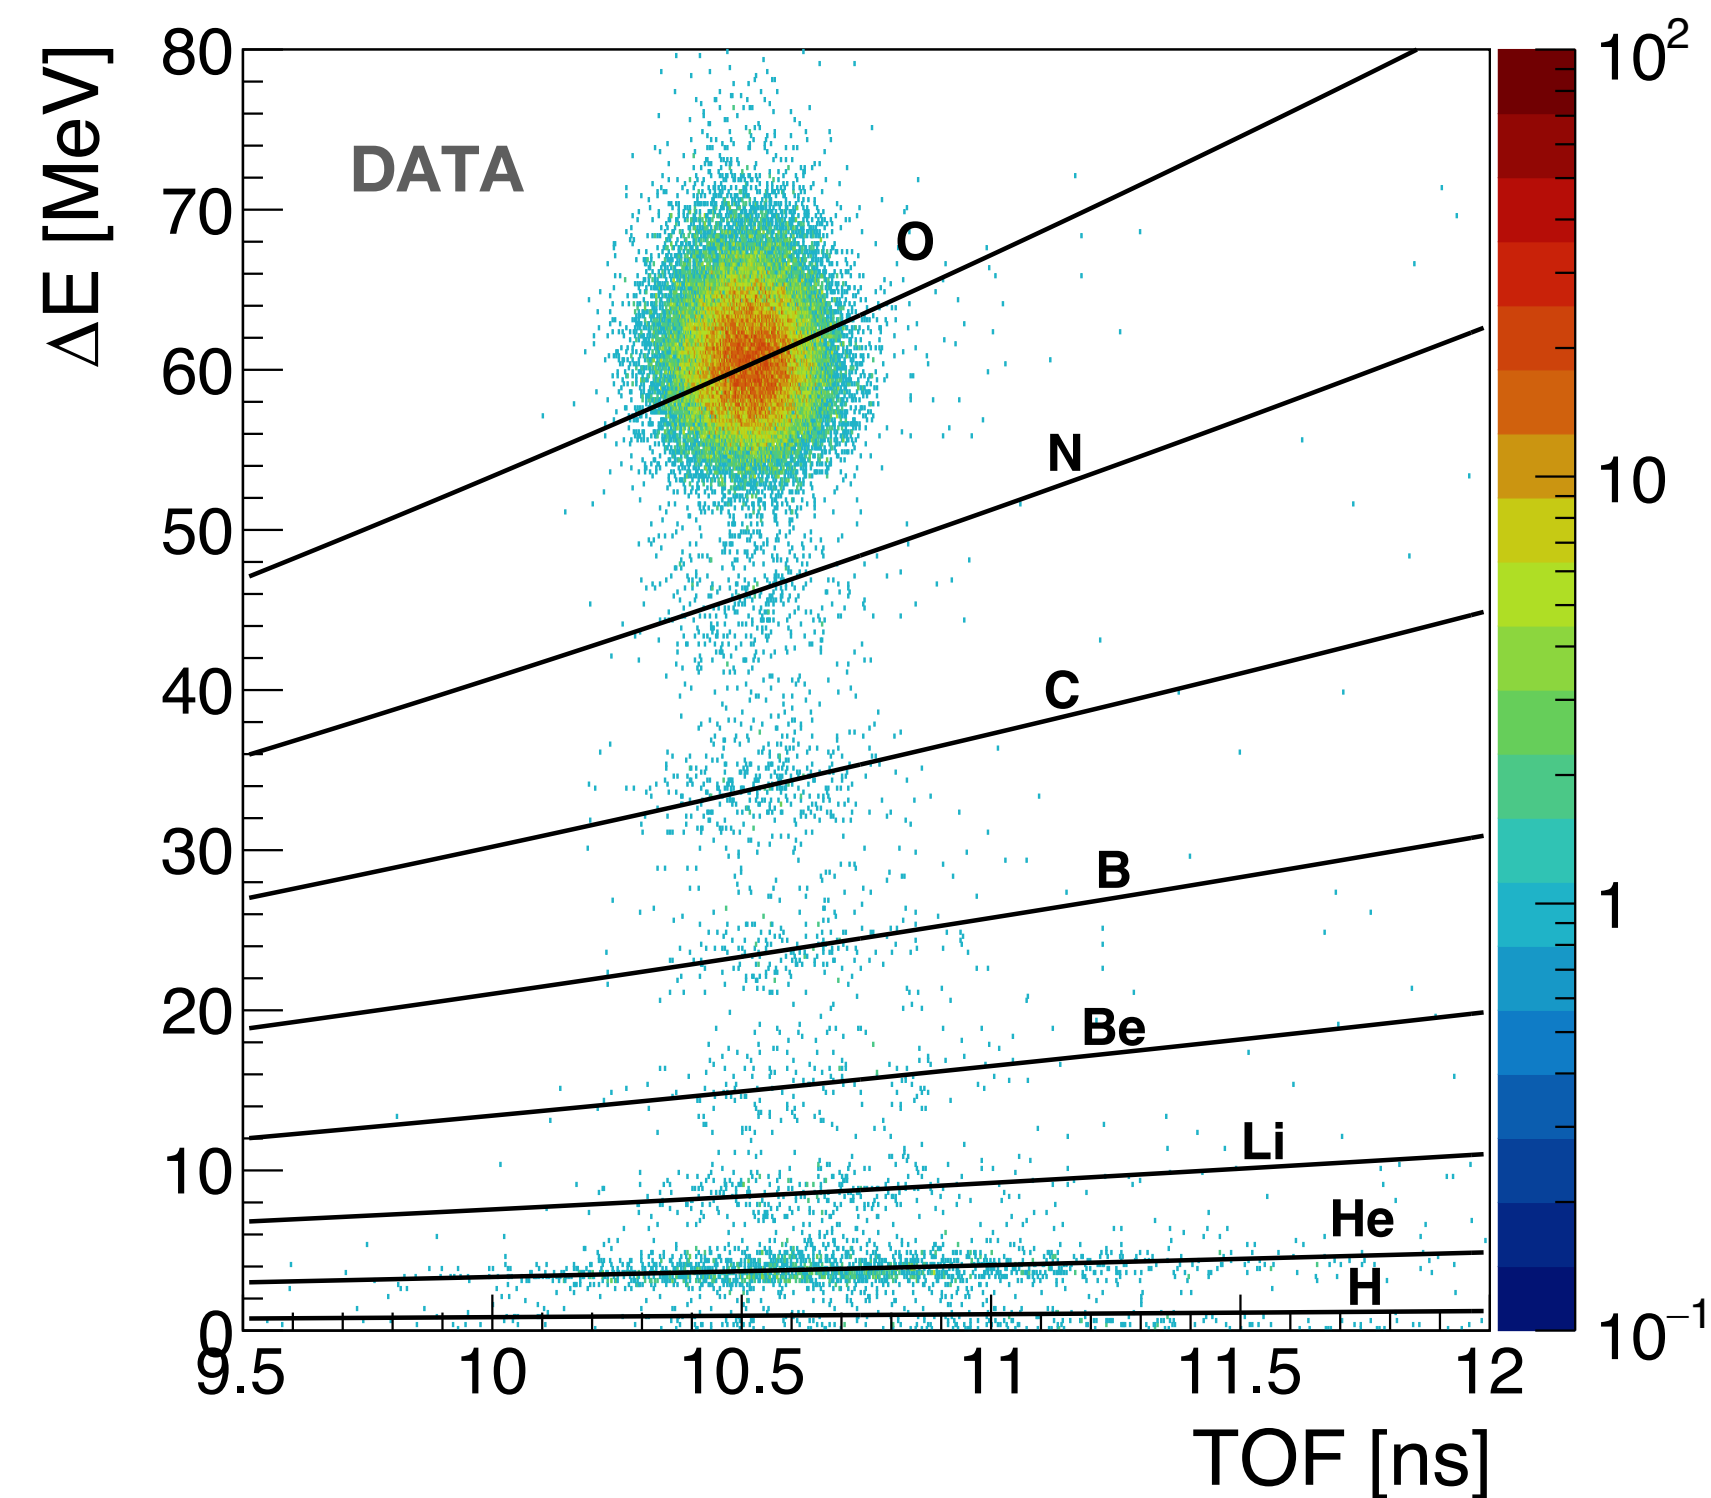

$$\sigma(Z) = \frac{1}{N_{TG} \cdot \epsilon(Z)} \left[\frac{N_{TG}(Z)}{N_{TG}^{prim}} - \frac{N_{noTG}(Z)}{N_{noTG}^{prim}} \right]$$


$$N_{TG} = \frac{\rho \cdot dx \cdot N_A}{A}$$

$$\begin{cases} \rho = 1.83 \text{ g/cm}^3 \\ dx = 0.5 \text{ cm} \\ A = 12.0107 \end{cases}$$

Element	$Yields_{bkg}$	$Yields_{signal}$
N_{prim}	31660	61516
He	484 ± 22	1087 ± 33
Li	89 ± 9	152 ± 12
Be	73 ± 9	77 ± 9
B	88 ± 9	136 ± 12
C	156 ± 13	231 ± 16
N	207 ± 14	248 ± 16

The **count of the primary ions** of the beam interacting with the target is provided by the **Start Counter**


Nuclear Emulsion Detector

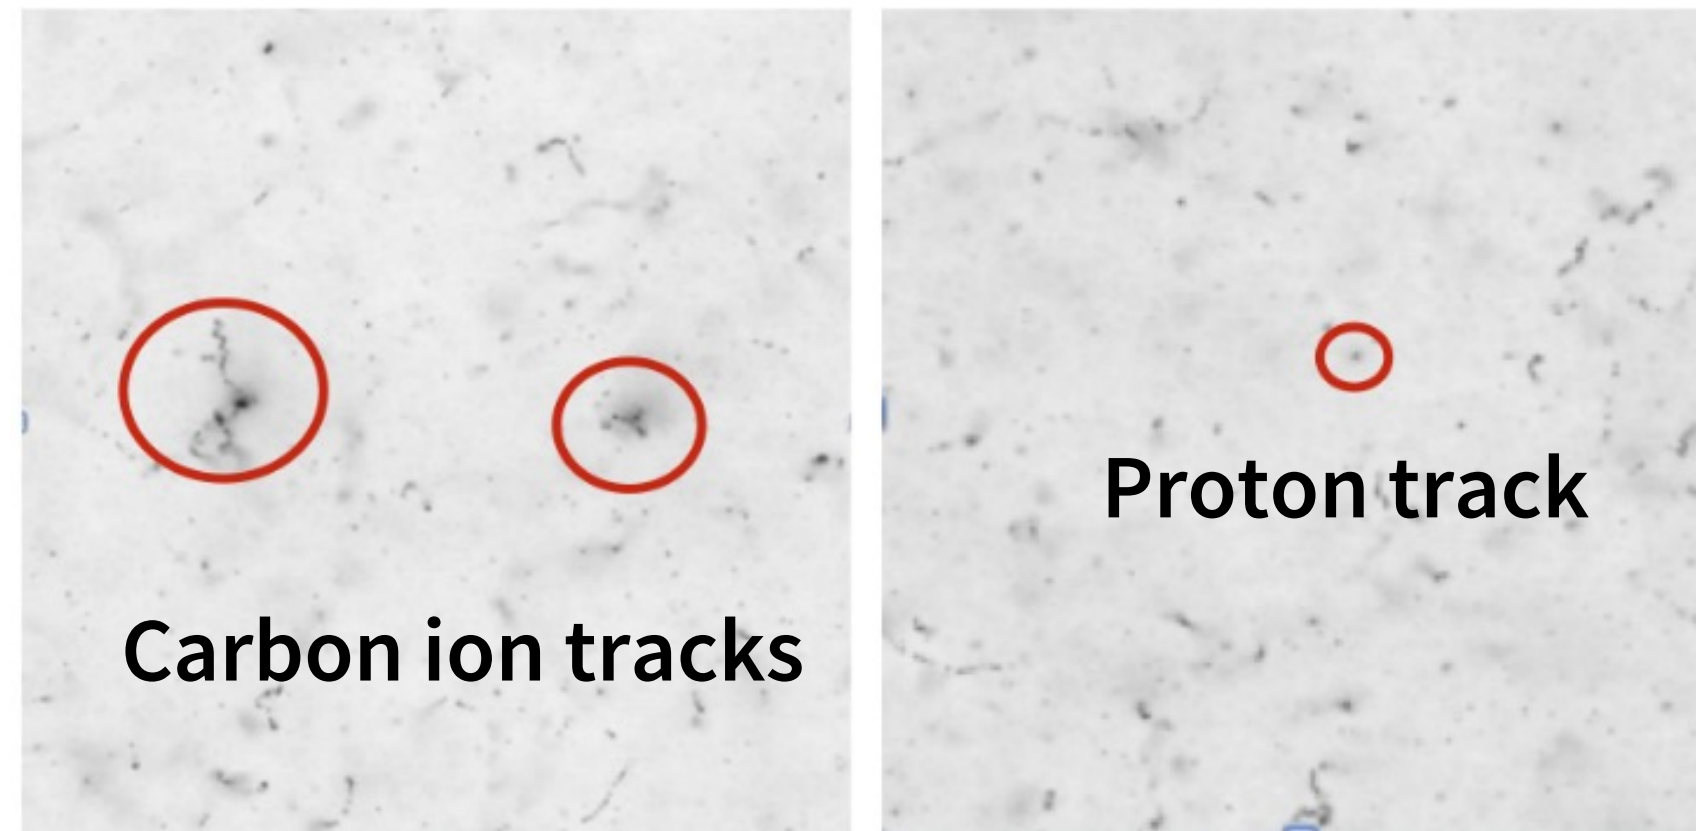

Emulsion Cloud Chamber (ECC) detector to measure the fragments with $Z \leq 3$ and $\theta < 70^\circ$

Nuclear emulsion films:

- Same technology of the OPERA exp. Emulsions
- Charged particles ionize the medium leaving a latent image of the track ($dE/dx \propto \text{track volume}$)
- Refreshing: keep emulsions at different temperature and humidity conditions to progressively erase the less ionizing tracks and to perform the charge identification
- General workflow: exposure, refreshing, microscope scan, track reconstruction, data analysis

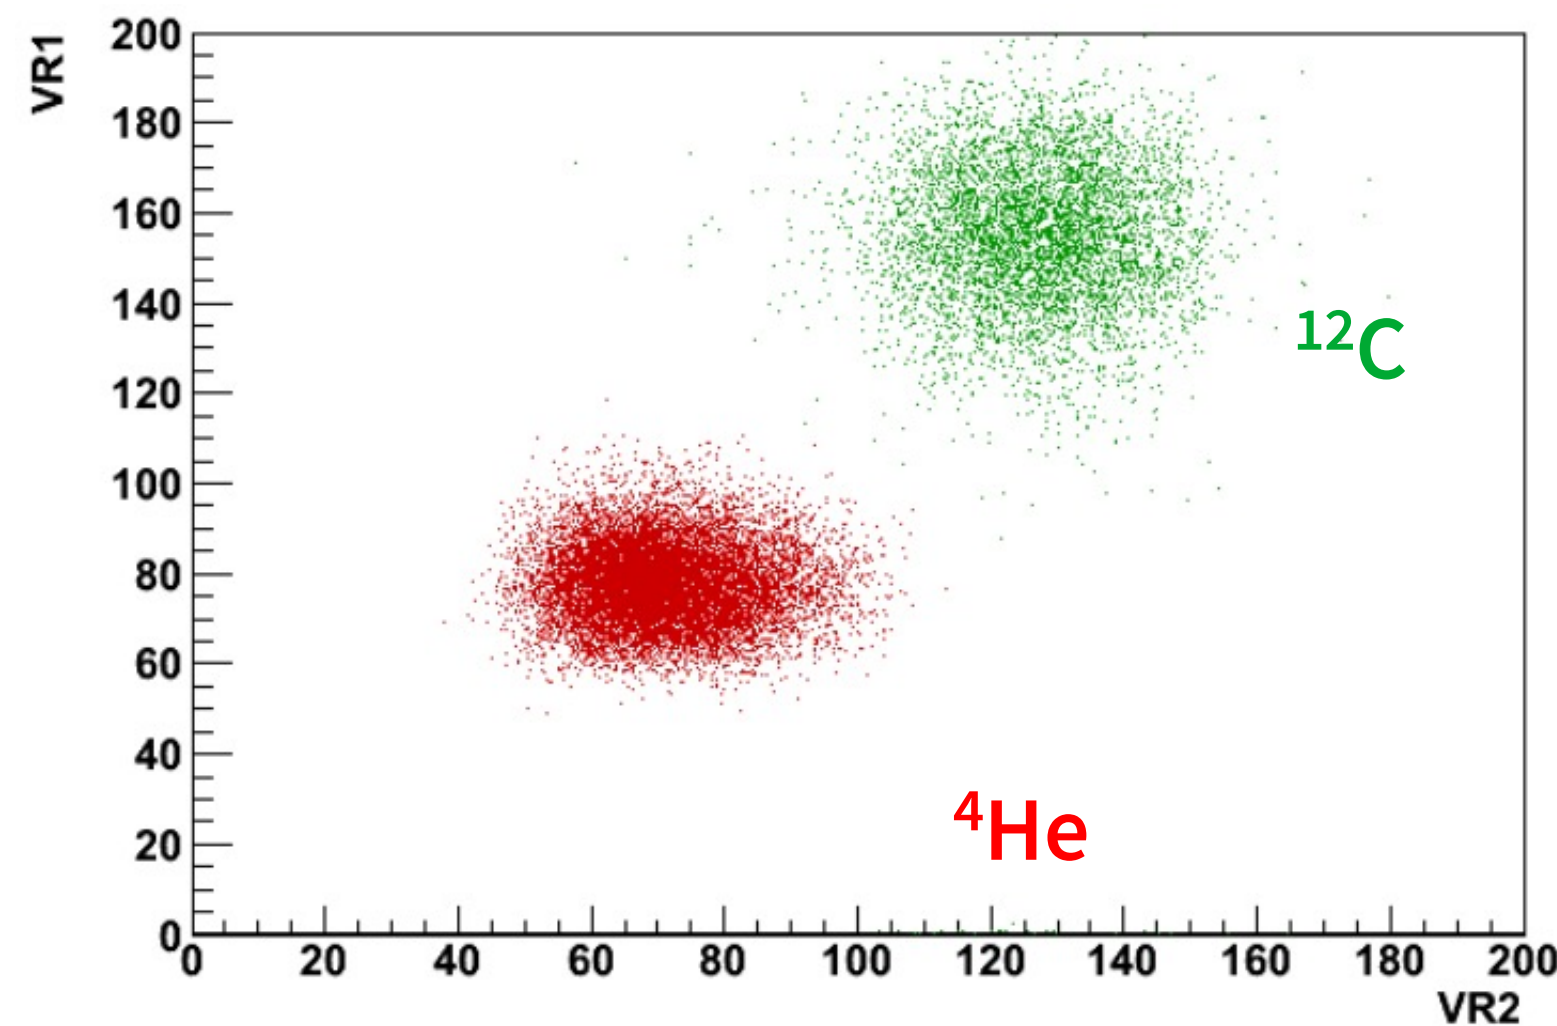


M.C. Montesi et al. Ion charge separation with new generation of nuclear emulsion films. *Open Physics*, 17(1):233–240, 2019.


Emulsion Spectrometer data taking

^{16}O @ 200 MeV/u on C_2H_4 targets:

Fragments angular distributions:

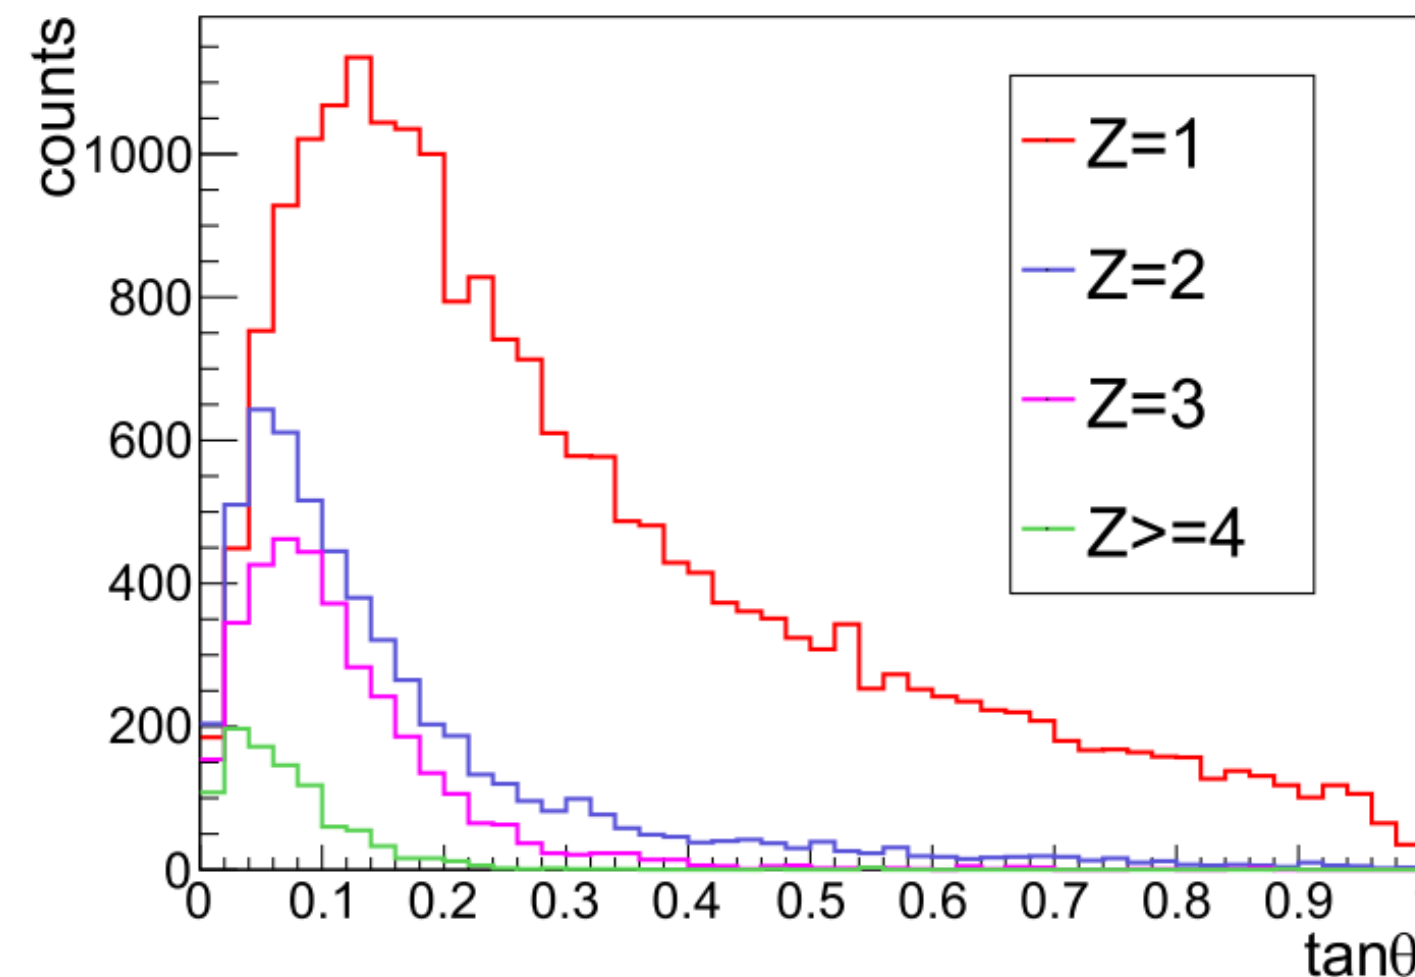

Angular differential cross section:

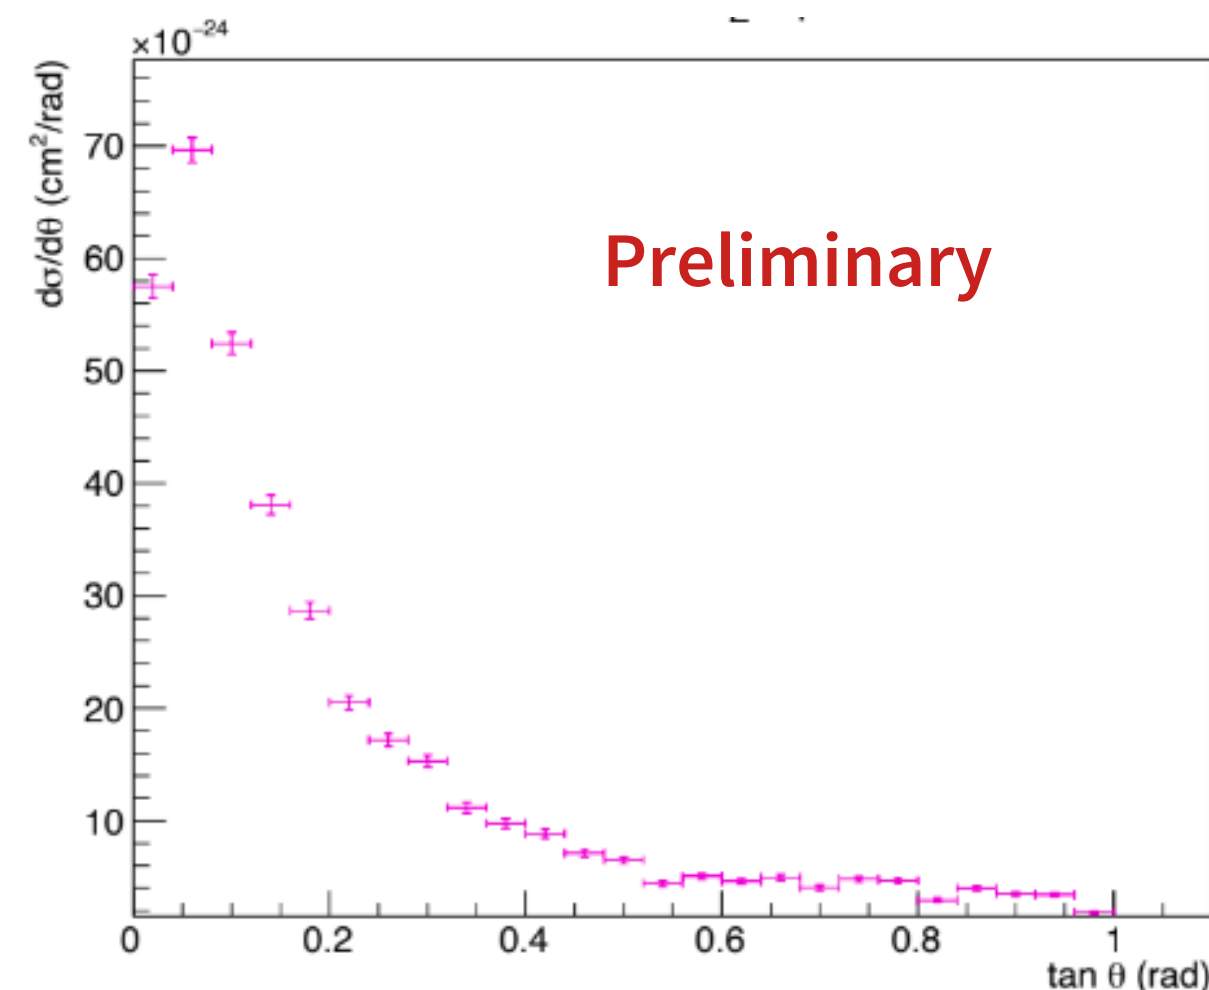

Concluded campaigns:

- Characterization with P, ^4He and ^{12}C at 80 MeV/u

M.C. Montesi et al. Ion charge separation with new generation of nuclear emulsion films. *Open Physics*, 17(1):233–240, 2019.

- ^{16}O @ 200 - 400 MeV/u and ^{12}C @ 700 MeV/u on C and C_2H_4 targets (data analysis ongoing)





G. Galati et al. Charge identification of fragments with the emulsion spectrometer of the foot experiment. *Open Physics*, 19(1):383–394, 2021.

Next measurements:

- ^{12}C @ 200 and 400 MeV/u on C and C_2H_4 targets at CNAO in 2023
- Study of a novel kind of emulsions to measure the target fragmentation process with direct kinematics

Mechanical checks

- Total weight: 74 kg
- Repulsion forces between M1 and M2: 2.2-2.4 kN
- Mechanics checked with 4-6 kN repulsive forces

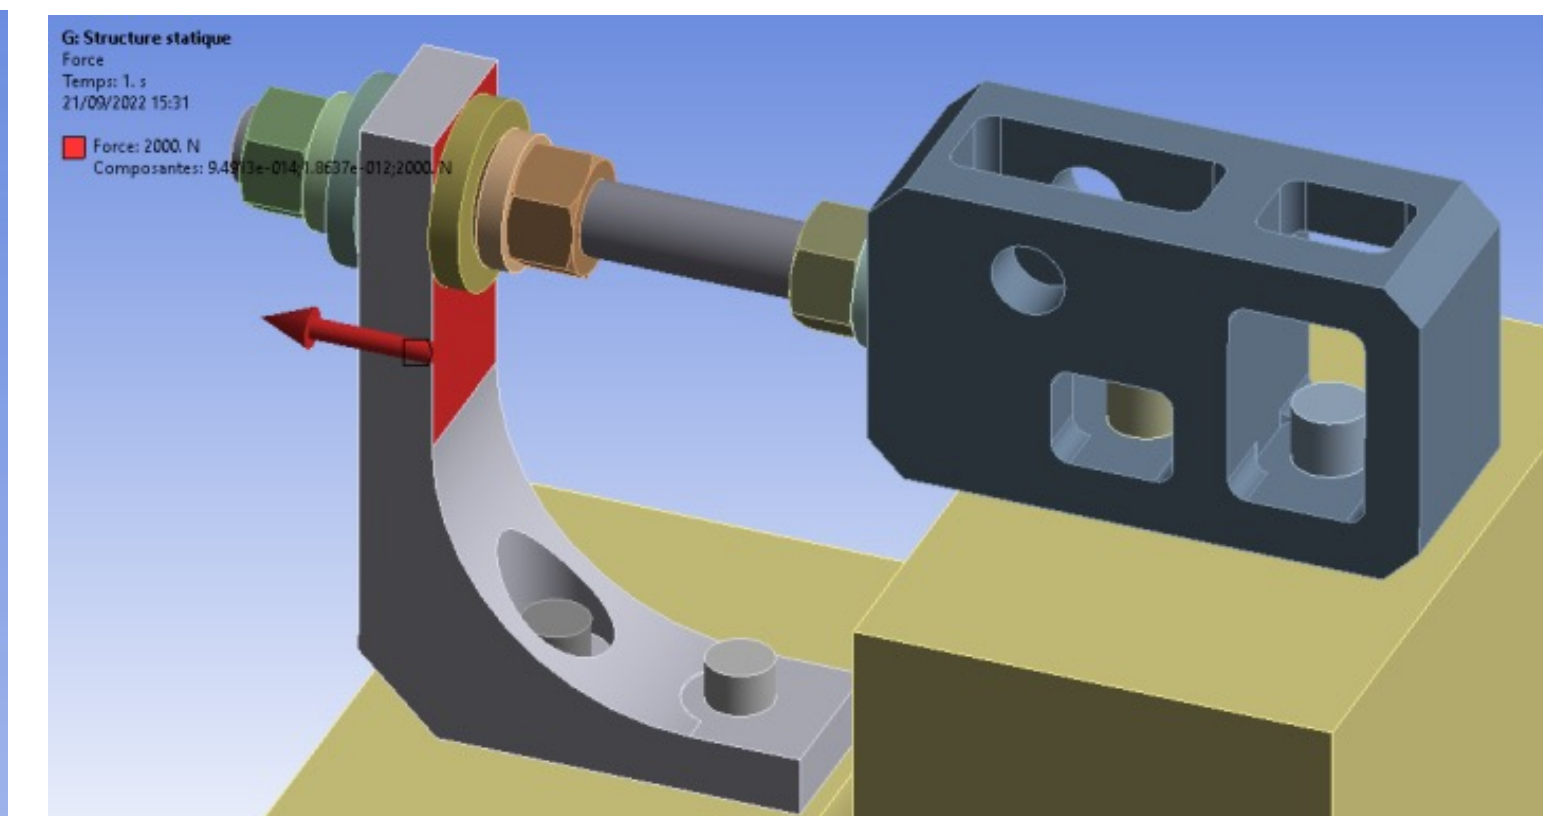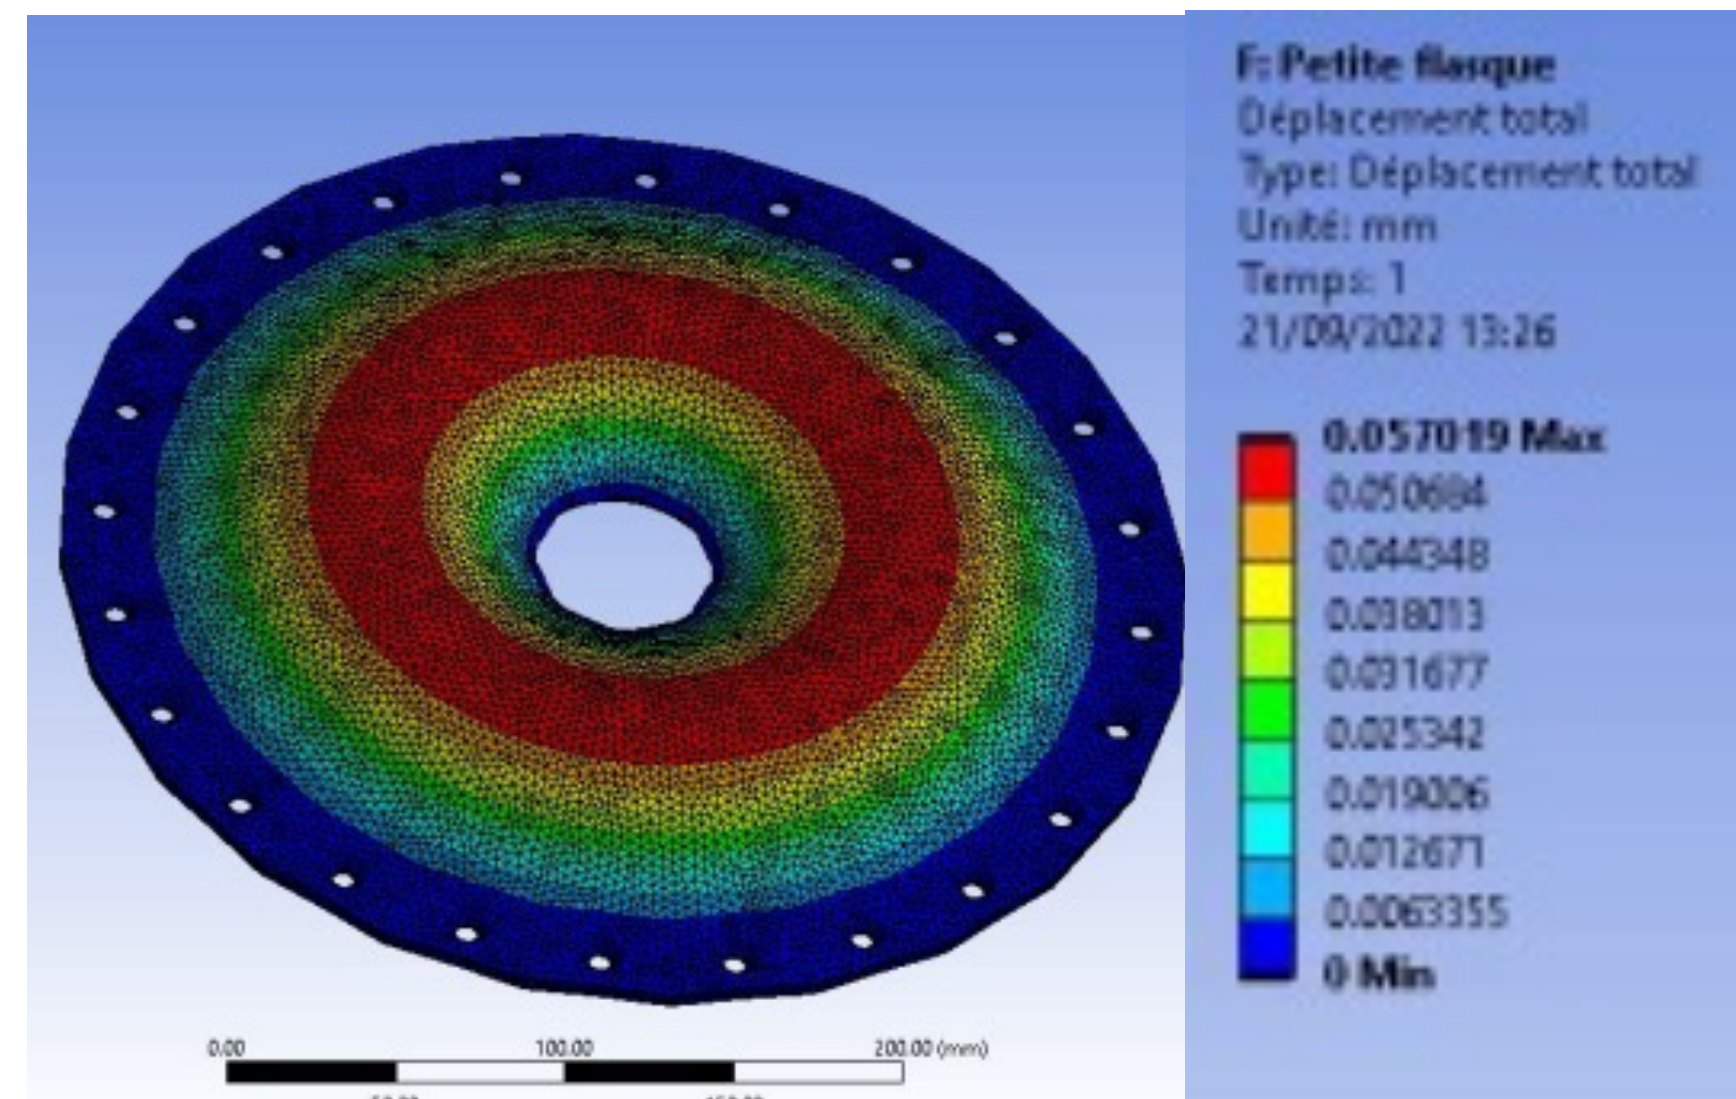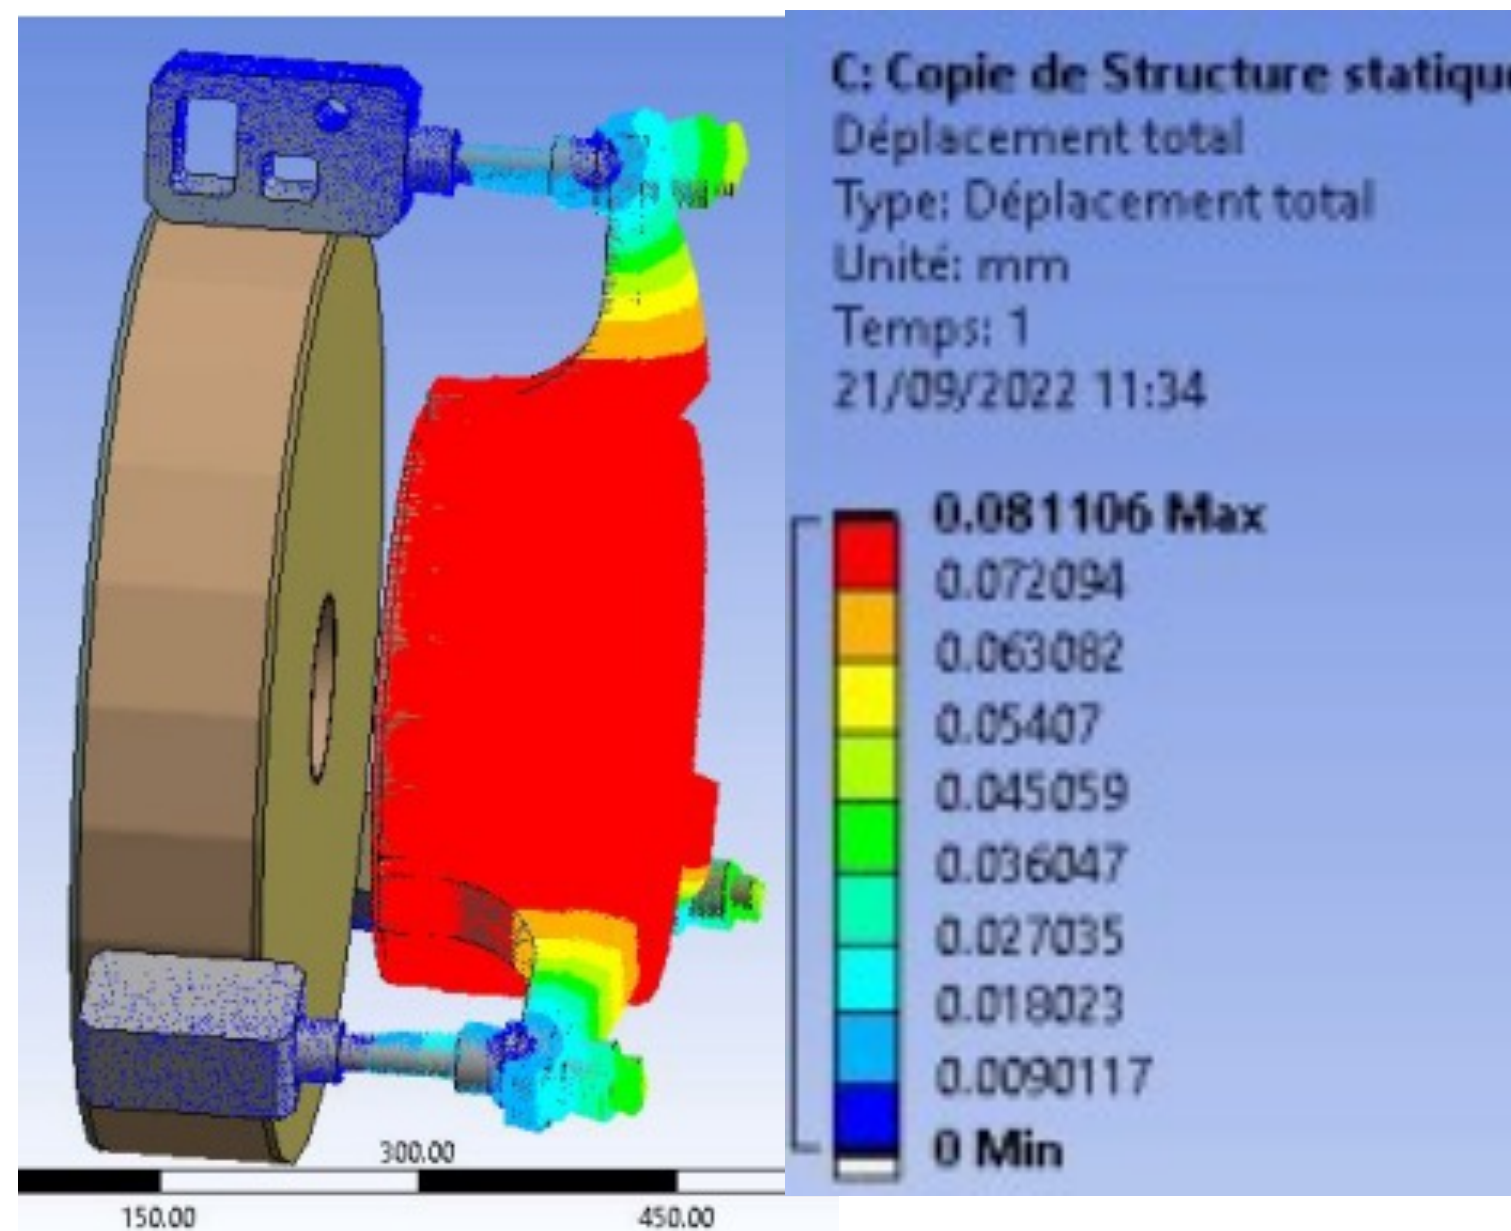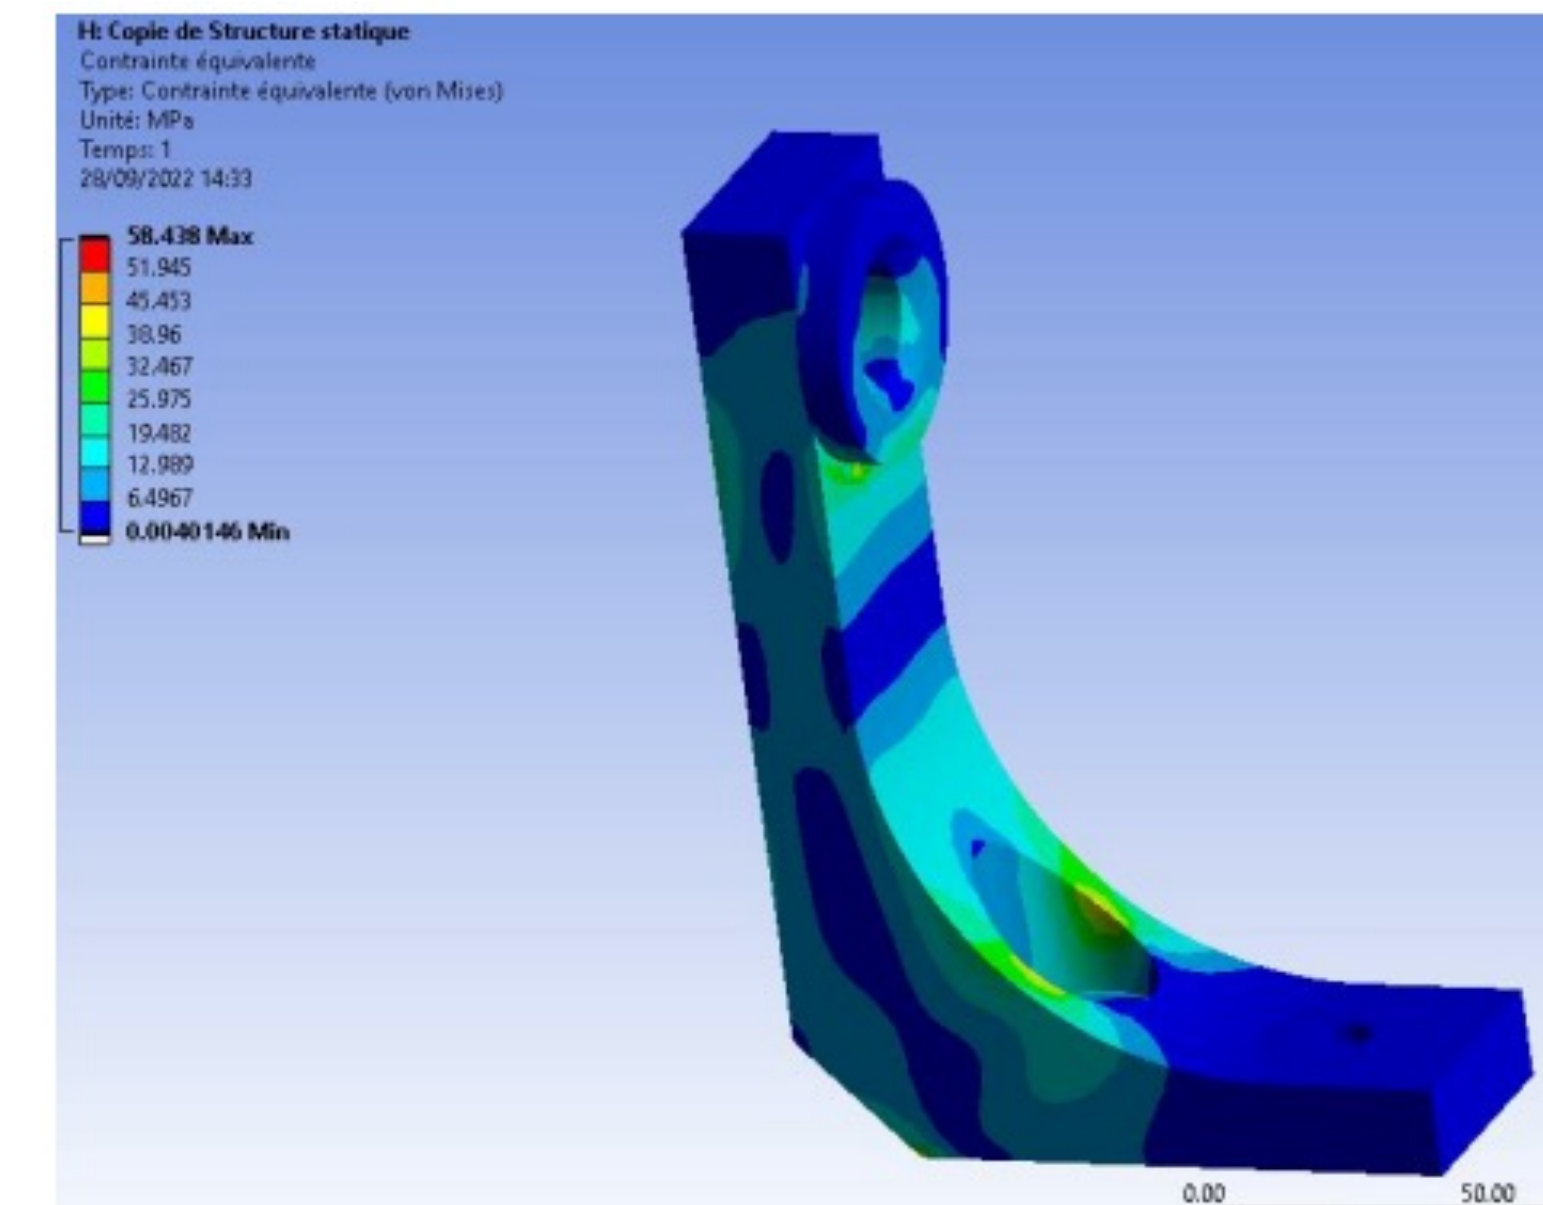


0.1 mm max displacement 0.06 mm max displacement

Survival fraction

An estimation of the RBE is based on the **Survival curves**. To compare the different biological effects for different radiations, the cell survival curves show the relationship between the fraction of cells preserving their reproductive integrity and the absorbed dose. The ratio between survivor cells and seed cells defines the **Survival Fraction (SF)**.


$$SF = \exp (- \alpha D - \beta D^2)$$

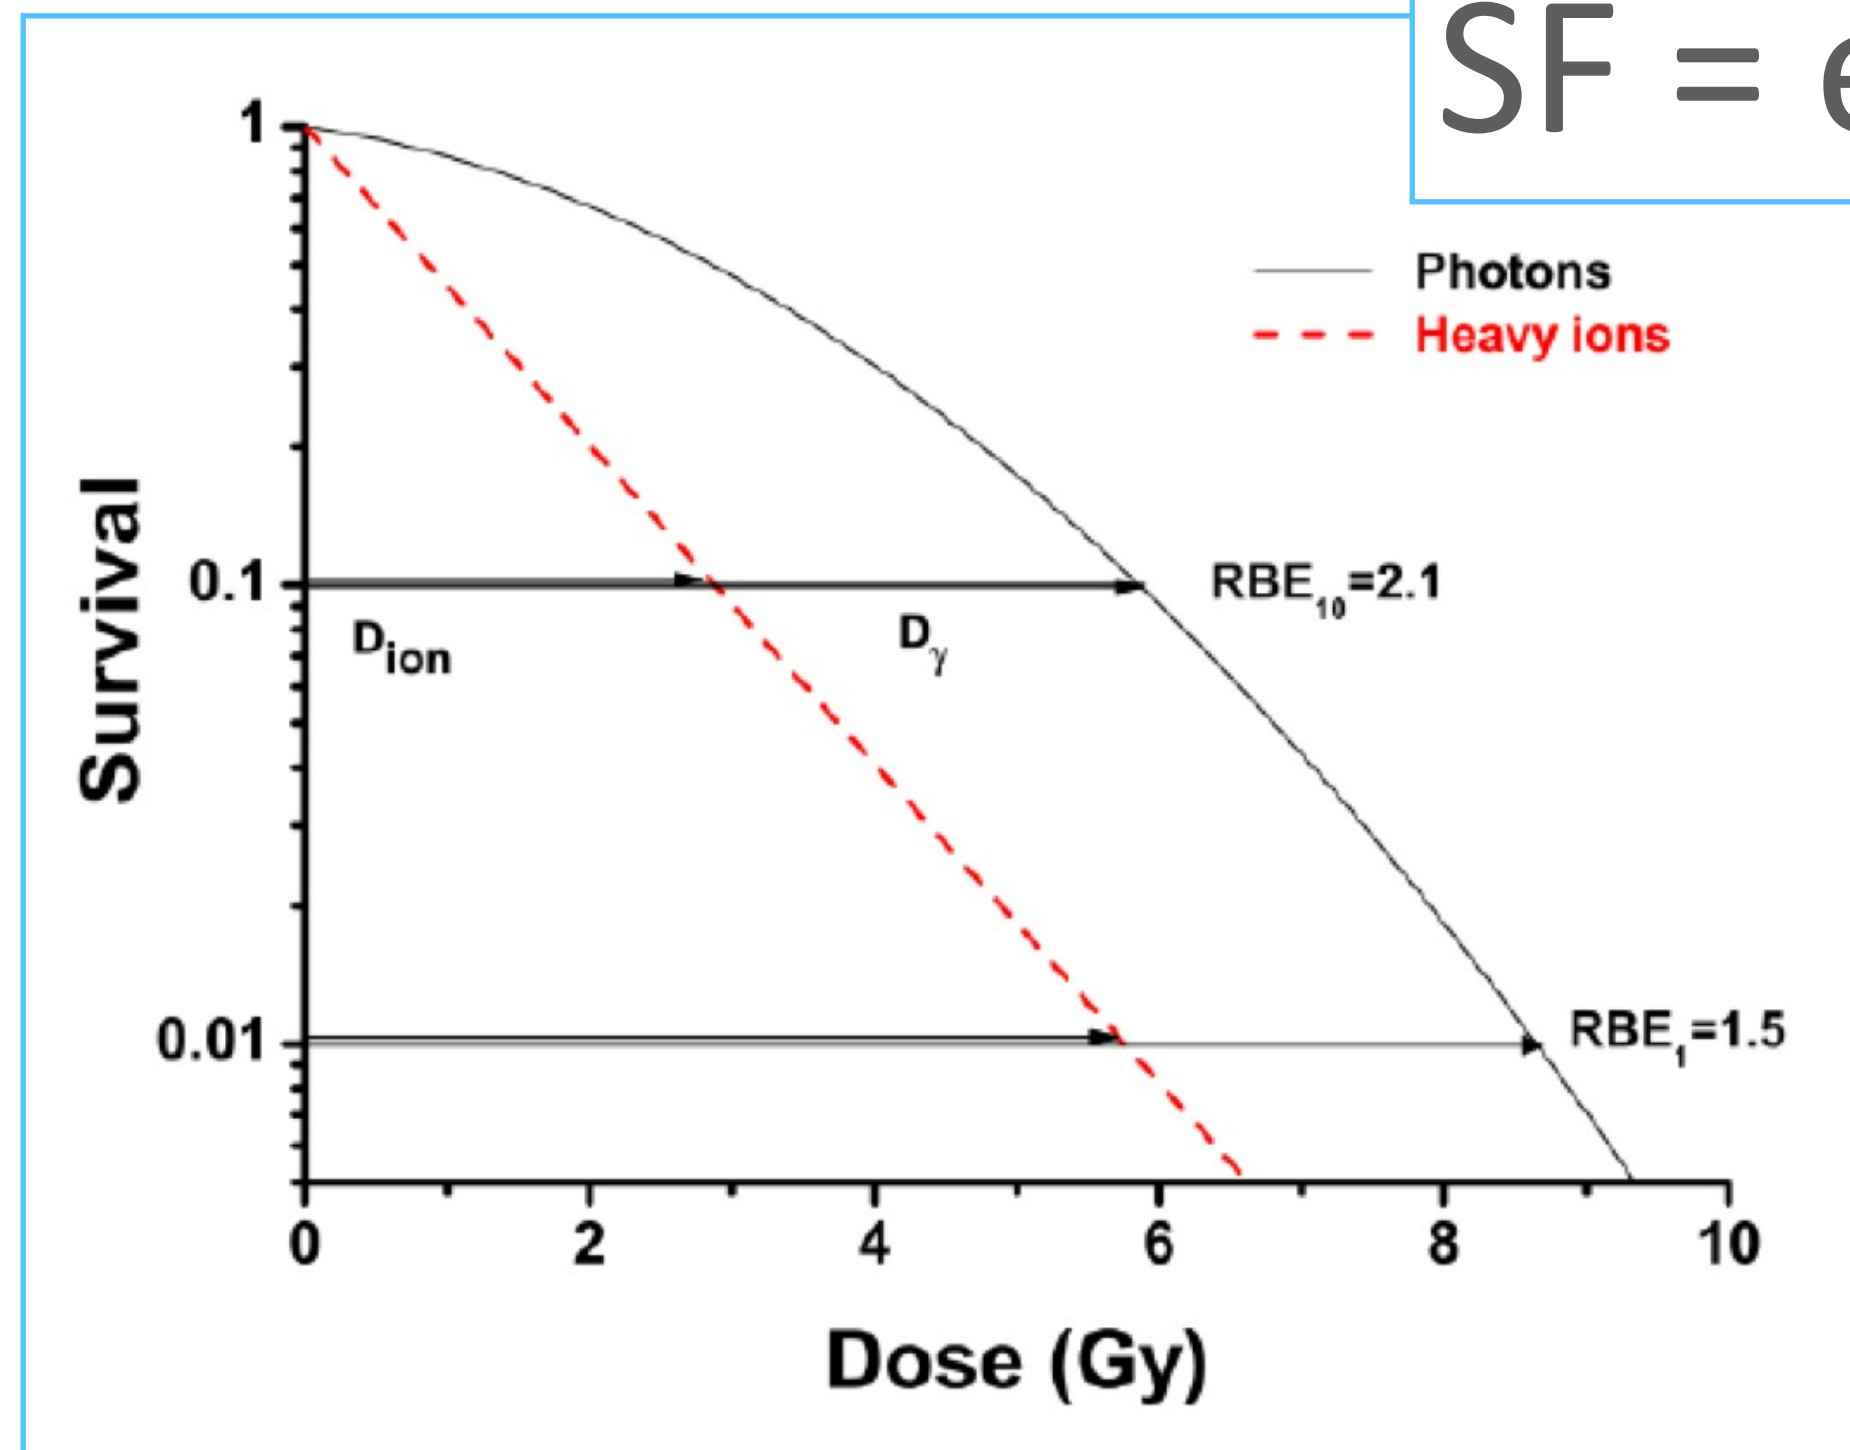

$$RBE = \frac{D_\gamma}{D_{ion}} \Big|_{iso}$$


RBE vs LET

- The RBE increases with LET up to an ion-dependent maximum value, then decreases for higher LET values.
- Indeed, at a certain LET value, a single-particle traversal is sufficient to reduce cell survival probability, making further ionisations unnecessary

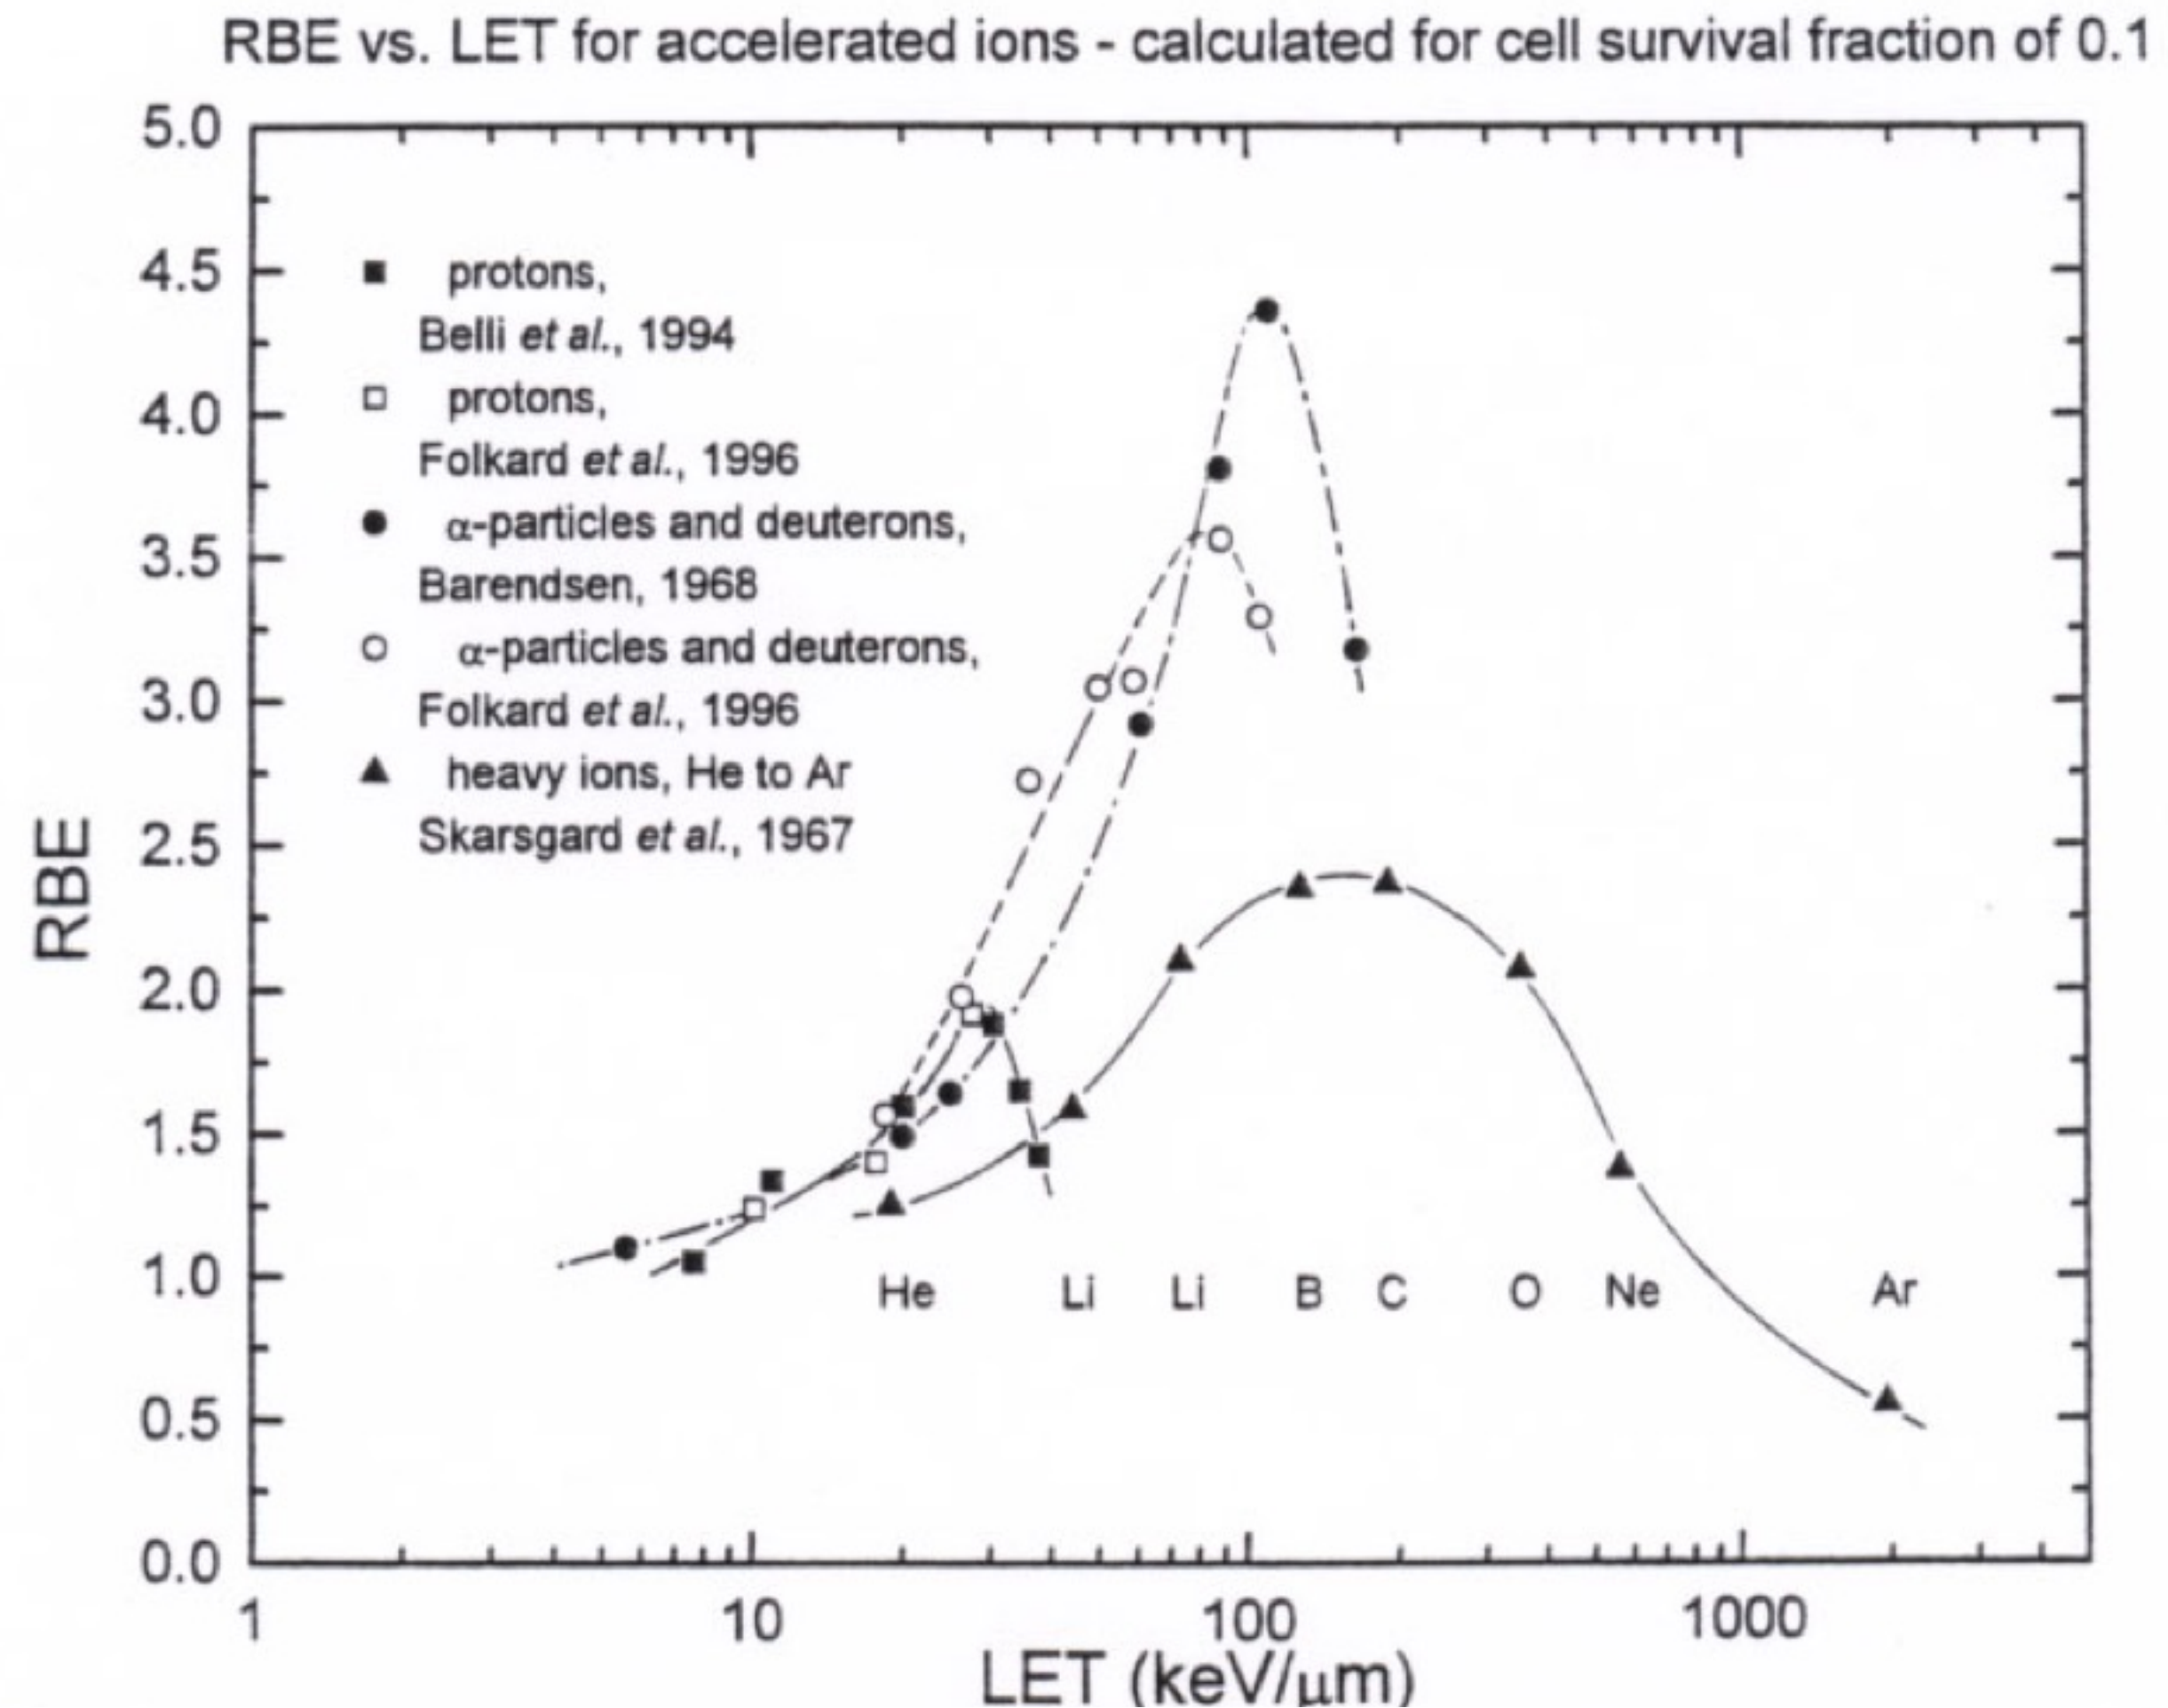

- Moreover, the RBE decreases due to the lower hitting probability, since the number of ions required for the same dose deposition is lower for particles with a higher LET

SPREAD OUT BRAGG PEAK (SOBP)

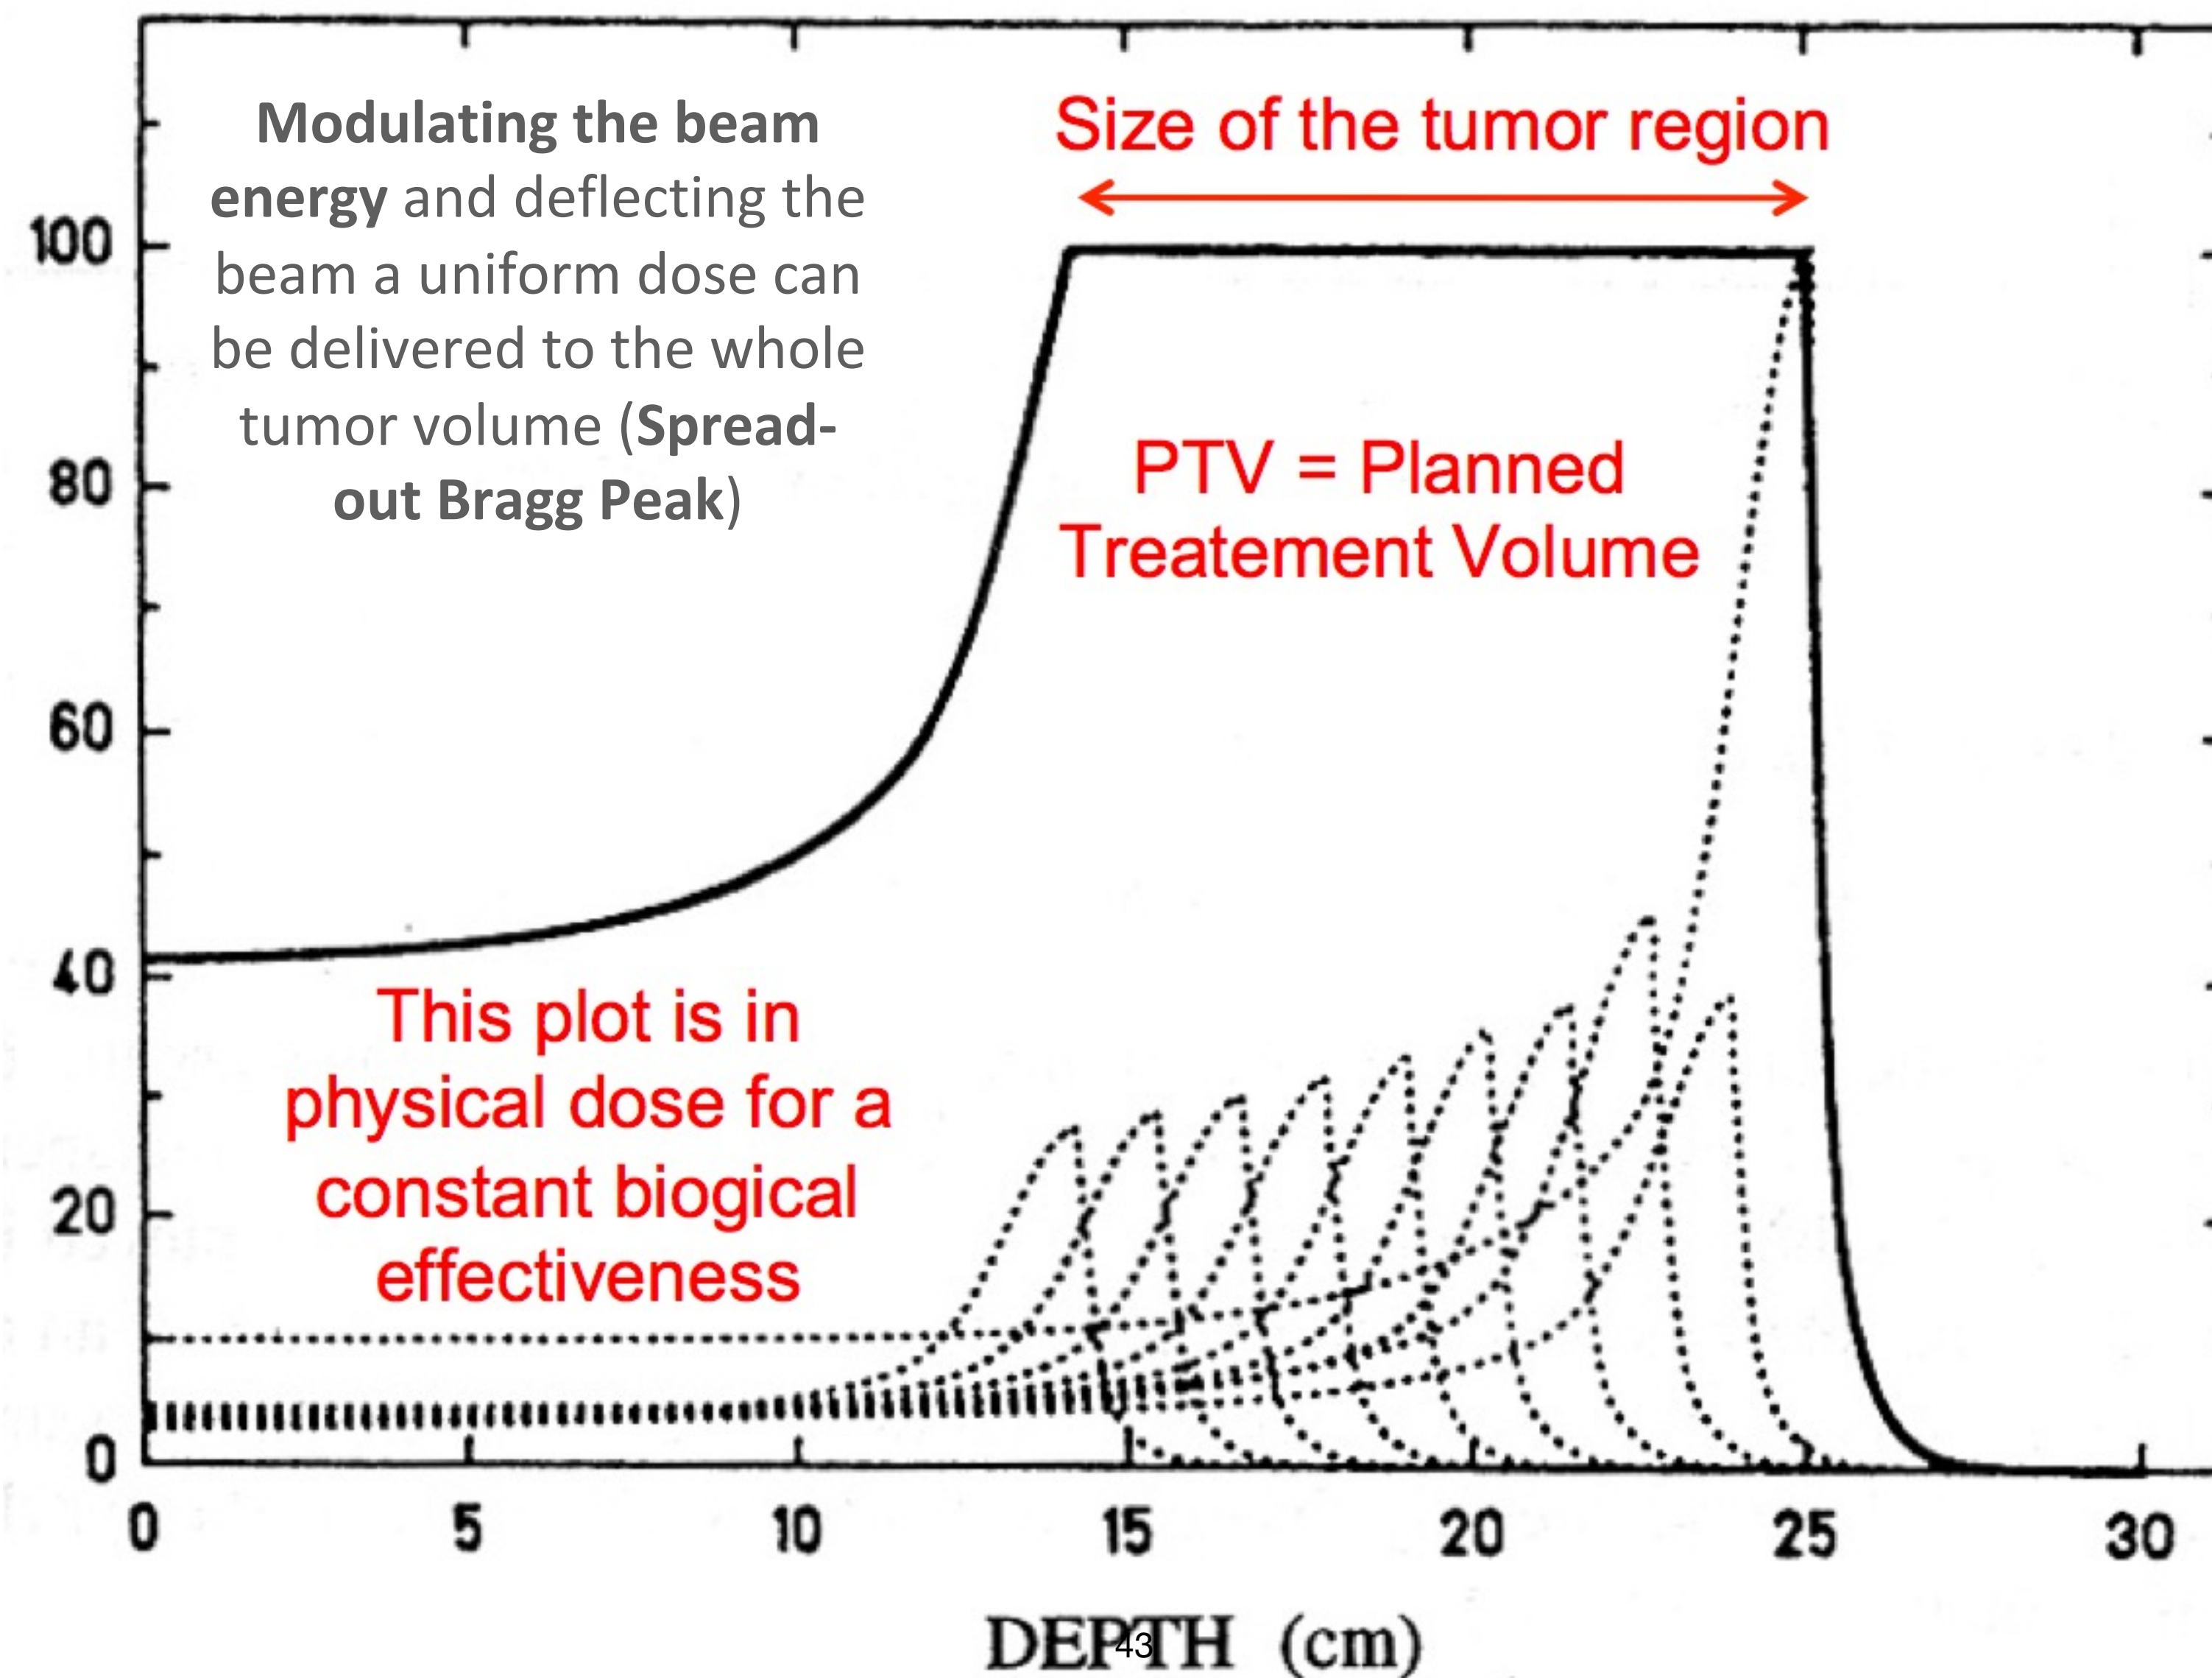

Beam Delivery System in PT

Active Scanning

